

Product catalogue 2019

Heating



All-in-one comfort for residential applications

Our promise...

... is to ensure that customers can depend on Daikin for the ultimate in comfort, so that they are free to focus on their own working and home lives.

We promise to dedicate ourselves to technological excellence, a design focus and the highest quality standards so that our customers can trust and rely on the comfort we deliver.

Our promise to the planet is absolute. Our products are at the forefront of low energy-usage and we will innovate to further reduce the environmental impact of our heating solutions.

From residential to collective heating solutions, from renovation to new build, we commit ourselves to answer all our customers' needs. Our heat pump DNA combined with our in-house combustion development positions Daikin as a leader, for now and the decades to come.



Table of content

Daikin World	2	Boilers	119
Introduction	4	Condensing boilers.....	120
Award winning units.....	4	Gas condensing boilers.....	122
Top notch technologies.....	5	Daikin Altherma 3 C Gas W.....	122
Heat Pump Keymark.....	5	Daikin Altherma C Gas W.....	128
Solutions overview.....	6	Daikin Altherma C Gas ECH ₂ O.....	130
Stand By Me	8	Daikin Altherma C Oil.....	134
Heat pumps	13	Tanks	141
Daikin Altherma 3 R.....	14	Thermal stores.....	144
Daikin Altherma 3 R F.....	16	Stainless steel tanks.....	146
Daikin Altherma 3 R ECH ₂ O.....	22	Oil boiler DHW tank NEW	147
Daikin Altherma 3 R W.....	30	Controls	149
Daikin Altherma 3 H NEW	36	Room controllers.....	150
Daikin Altherma 3 H F.....	38	Online controllers.....	153
Daikin Altherma 3 H W.....	44	Multi-zone controllers.....	154
Daikin Altherma R.....	50	Heat pump convector	157
Daikin Altherma R F.....	50	Daikin Altherma HPC.....	158
Daikin Altherma R ECH ₂ O.....	64	Solar heating systems	163
Daikin Altherma R W.....	70	Solar panels for pressurised use and Drain-back system.....	170
Daikin Altherma M.....	80	Solar panel - pressurised system.....	172
Daikin Altherma R HT.....	86	Solar panels - drain-back system.....	174
Daikin Altherma M HW.....	90	Solar collector.....	177
Daikin Altherma R HW.....	92	Pump station.....	177
Daikin Altherma R Flex Type HT HW.....	94		
Daikin Altherma R Flex Type HW.....	96		
Daikin Altherma Ground source heat pump NEW	98		
Daikin Altherma 3 GEO.....	98		
Daikin Altherma GEO.....	103		
Daikin Altherma Hybrid heat pump.....	104		
Daikin Altherma R Hybrid.....	104		
Daikin Altherma R Hybrid + multi.....	108		
Daikin Altherma H Hybrid.....	112		

Award winning units

thanks to a unique design

Heating products recently gathered all the most famous design awards: iF design and RedDot awards thanks to a brand-new design. Our wall mounted gas condensing boiler as well as our third generation heat pump (both floor standing and wall mounted models) received these design awards, putting the spotlight on our unique design.



reddot award 2018
winner

Heating products are taking more and more importance within Daikin solutions portfolio. More products mean more solutions to cover all the needs. The design of the units is a major asset for customers that's why we decided to bring a brand-new design to our heating products.

The new design has to be discrete and modern, but also intuitive and user-friendly. The Daikin Eye has been developed to help both customers and installers getting the best experience possible while using the unit interface. The high-resolution colour controller is easy to use, and the Daikin Eye informs instantaneously if everything is working correctly.

All those features were rewarded with the most famous design awards: iF and RedDot design awards, for our high-end technology products.



Daikin Altherma 3 heat pumps



Daikin Altherma 3 gas boiler

Top-notch technologies and efficiency

Daikin commits to develop the most effective technologies to reach the best energy efficiency levels and respect the planet. Our Bluevolution technology uses the R-32 refrigerant, which largely lowers CO₂ emissions compared to its competitors. Daikin leads again the way for better heating solutions and a better environment.

Customers are looking for the best solutions for their home, with an eye on the energy efficiency labels. Daikin always proposes the most environment friendly units with the maximum energy labels for the heat pumps: A+++ (energy label 2019).

The third generation Daikin Altherma heat pumps reach this efficiency thanks to the Bluevolution technology. It combines an in-house developed compressor and the R-32 refrigerant which makes it unique on the market.

Less CO₂ emissions & more efficiency, the recipes for top-notch technologies.



Heat Pump Keymark

A unique certificate for the European market
















The Heat Pump KEYMARK is a voluntary, independent, European certification mark for all heat pumps. It certifies space heating performance, sound power level, domestic hot water performance as well as operating tests.

The Heat Pump KEYMARK is based on independent, third-party testing and demonstrates compliance with product requirements as set in the Heat Pump KEYMARK scheme rules and with efficiency requirements as set by Ecodesign Lot 1, Lot 2.















As a group, we are strongly convinced of the quality of this scheme, both for our customers and ourselves as manufacturers. It is therefore our intention to certify the entire portfolio of Daikin Altherma heat pumps.

Find all our certified products on
<http://www.heatpumpkeymark.com>

Solutions overview

		Heat pumps				
		Air-to-water technology				
		Space heating and domestic hot water				
		R-32 Daikin Altherma low temperature split	R-410A Daikin Altherma low temperature split	Daikin Altherma low temperature monobloc	Daikin Altherma high temperature split	Monobloc domestic hot water heat pump
Products		NEW 				
Page		13	50	80	86	90
Set-up type						
Space heating (up to)		A+++ (1)	A++	A++	A+	-
Domestic hot water (up to)		A+ (1)	A	-	B	A+
Renovation		-	●	●	●	●
New build		●	●	●	-	●
Tanks	Thermal stores EKHWC/D/P* 	A	A	A	B	-
	EKHTS-AC 	-	-	-	B	-
	EKHWS(U)-B 	-	B	A	-	-
	EKHWS(U)-D 	A	-	A	-	-
	DFLOSTO-A 	-	-	-	-	-
Thermal Solar panels		●	●	●	-	●

(1) According to EU n°811/2013 - label lay-out 2019

			Hybrid		Combustion	
			Ground to water	Hybrid	Gas	Oil
Domestic hot water		Space heating	Space heating and domestic hot water			
Domestic hot water heat pump	Daikin Altherma Flex Type	Daikin Altherma LT High capacity	Daikin Altherma ground source heat pump	Daikin Altherma hybrid heat pump	Wall mounted	Floor standing
						
92	94	96	98	104	119	134
						
-	-	A ⁺	A ⁺⁺⁺	A ⁺⁺	A	A
A	A	-	A	A	A	●
●	-	-	●	●	●	●
●	●	●	●	●	●	●
-	-	-	-	●	A	A
-	A	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	●
●	●	-	-	●	●	●

Stand By Me,

A journey to customer satisfaction

It's time to relax. With your customer's new Daikin installation and Stand By Me service programme, you can rest assured they are benefiting from the best comfort, energy efficiency, usability and service available on the market. Stand By Me eliminates your clients' worries and provides them with a free, extended warranty, quick follow-up from Daikin service providers, and additional warranties for specific parts.



Free warranty extension



The first advantage of **Stand By Me** is a free warranty extension:

- ✓ applies to both labour and parts
- ✓ begins immediately after registration



Quick follow-up by Daikin service partners

Daikin service partners are automatically notified when a customer registers their installation on **www.standbyme.daikin.eu** and needs maintenance.

Your customer is guaranteed:

- ✓ quick and reliable service
- ✓ management of all information related to their installation such as, registration documents, attendance records, maintenance records, etc.
- ✓ realtime error codes are informing the service partner about possible issues



Extended warranty on parts

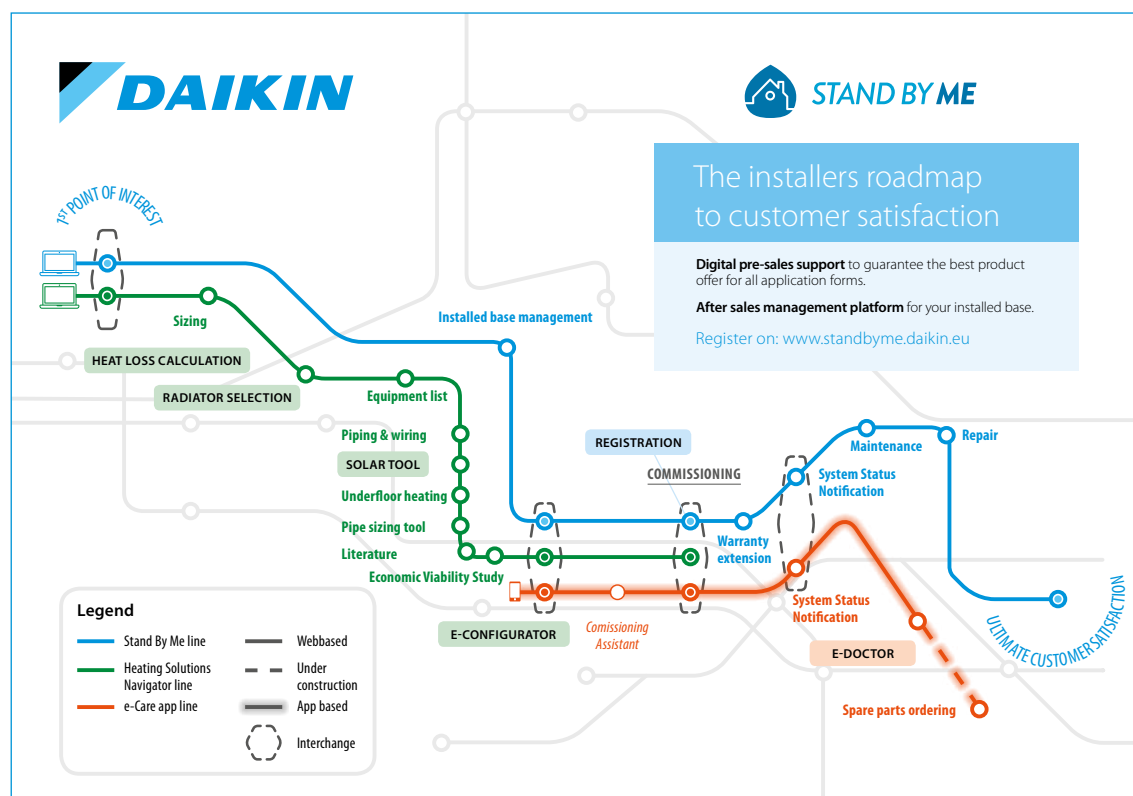
For a small fee, customers can extend the warranty on specific parts. Contact your local Daikin branch to have more information about the specific offer in your country.

Stand By Me guarantees:

- ✓ that each component is replaced quickly
- ✓ helps avoid financial surprises
- ✓ long life and smooth operation and all other benefits of a Daikin installation
- ✓ reliable service from official Daikin service partners

Daikin service partners work exclusively with Daikin parts and have all of the necessary technical knowledge to solve any issue that may arise

Stand By Me roadmap overview







Heating Solutions Navigator



Want to know more about our Heating Solutions Navigator?

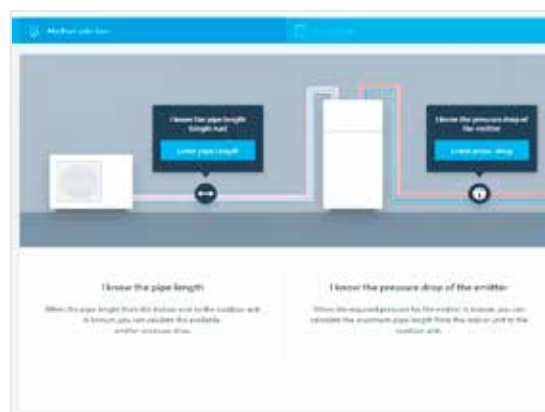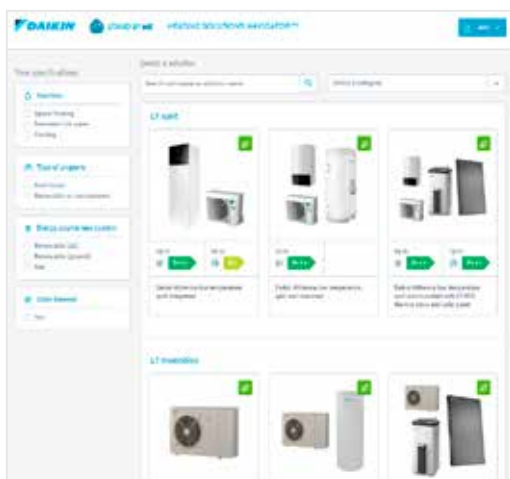- › The Heating Solutions Navigator is a digital toolbox developed for Daikin professionals with the aim to assist in providing the best fit solution for your customers home.
- › With this tool you can configure your installation, create custom made piping & wiring diagrams, set the configuration on your installation and much more.



E-Care app



The Daikin e-Care app wants to make the life of a Daikin installer easier by offering Stand By Me registrations via QR code scanning, easy configuration of your heating installation and trouble-shooting via the e-Doctor part.





STAND BY ME

www.standbyme.daikin.eu

Stand By Me and the Heating Solutions Navigator are built to connect between yourself and Daikin to make your life easier.



Interested in how the platform operates? Please scan the QR-codes to see a demo for each tool.



HEATING SOLUTIONS NAVIGATOR (HSN)

professional.standbyme.daikin.eu

The Heating Solutions Navigator is a digital toolbox developed for Daikin professionals with the aim to assist in providing the best fit solution for your customers homes. With this tool you can configure your installation, create custom made piping & wiring diagrams, set the configuration on your installation and much more.



SIZING

HSN Heat loss calculation tool/ Room by Room

The optional 'Room by Room' heat load calculation tool, is a tool which enable you to calculate the heat load in a property. Next to the Room by Room, a simplified heat load calculation is available.

SOLAR

HSN Solar Selection Tool

The Solar Selection Tool shows the benefits of a DAIKIN solar system and supports professionals in selecting the right solar system for a house.

PIPE SIZING TOOL

Calculate the maximum hydronic piping length from the indoor unit to the outdoor unit based on the emitter pressure drop or the other way around.

ECONOMIC VIABILITY STUDY

Compare your Daikin solution with a benchmark solution.

INSTALLED BASE MANAGEMENT



EQUIPMENT LIST



RADIATOR

HSN Radiator Selection Tool

This Radiator selector tool supports customers in selecting the appropriate radiator size for each room.

UNDERFLOOR HEATING

The underfloor Heating Tool gives the customer an indication of material that is needed for a specific project. A detailed calculation and floorplan can also be asked via this toolbox.

PIPING & WIRING

Customized piping and wiring diagrams are generated for each and every project, taking into account many parameters such as heat generator, zoning, emitter type and options.

CONFIGURATION TOOL

The e-Configurator is a web based tool and app which allows installers to configure the settings of Daikin Altherma heat pumps remotely. Thanks to its user friendly and intuitive interface, configuration can be completed in a couple of steps. Then it can be stored as a pdf or saved in the USB stick/ SD card to upload it in the heat pump on site.



LITERATURE



YOUR LOCAL SBM/HSN SPECIALIST

SBM responsible

François Deroche: deroche.f@daikin.fr

HSN responsible

David Le Cam: LeCam.D@daikin.fr

REGISTRATION

Installation Registration
SBM is an after-sales service tool where end-users can extend the warranty on their installation or order maintenance packages. All Daikin professionals have an essential role in these service offerings.

With Stand By Me, you, as Daikin professional, can keep a complete digital logbook of your installed base of Daikin products and consult it via any mobile device.

COMMISSIONING

COMMISSIONING ASSISTANT

Use this special hydro check module during commissioning.



DEMO

WARRANTY EXTENSION

SYSTEM STATUS NOTIFICATION

SYSTEM STATUS NOTIFICATION

Receive malfunction codes of your installations directly on your Stand By Me platform or via a notification in the e-Care app.

MAINTENANCE



DEMO

REPAIR

E-DOCTOR

Part of e-Care
Daikin e-Doctor is part of e-Care, an application to guide our Daikin colleagues and installers in troubleshooting a unit.

SPARE PARTS ORDERING

ULTIMATE CUSTOMER SATISFACTION

E-CARE



DAIKIN

Stand By Me, a journey towards customer satisfaction

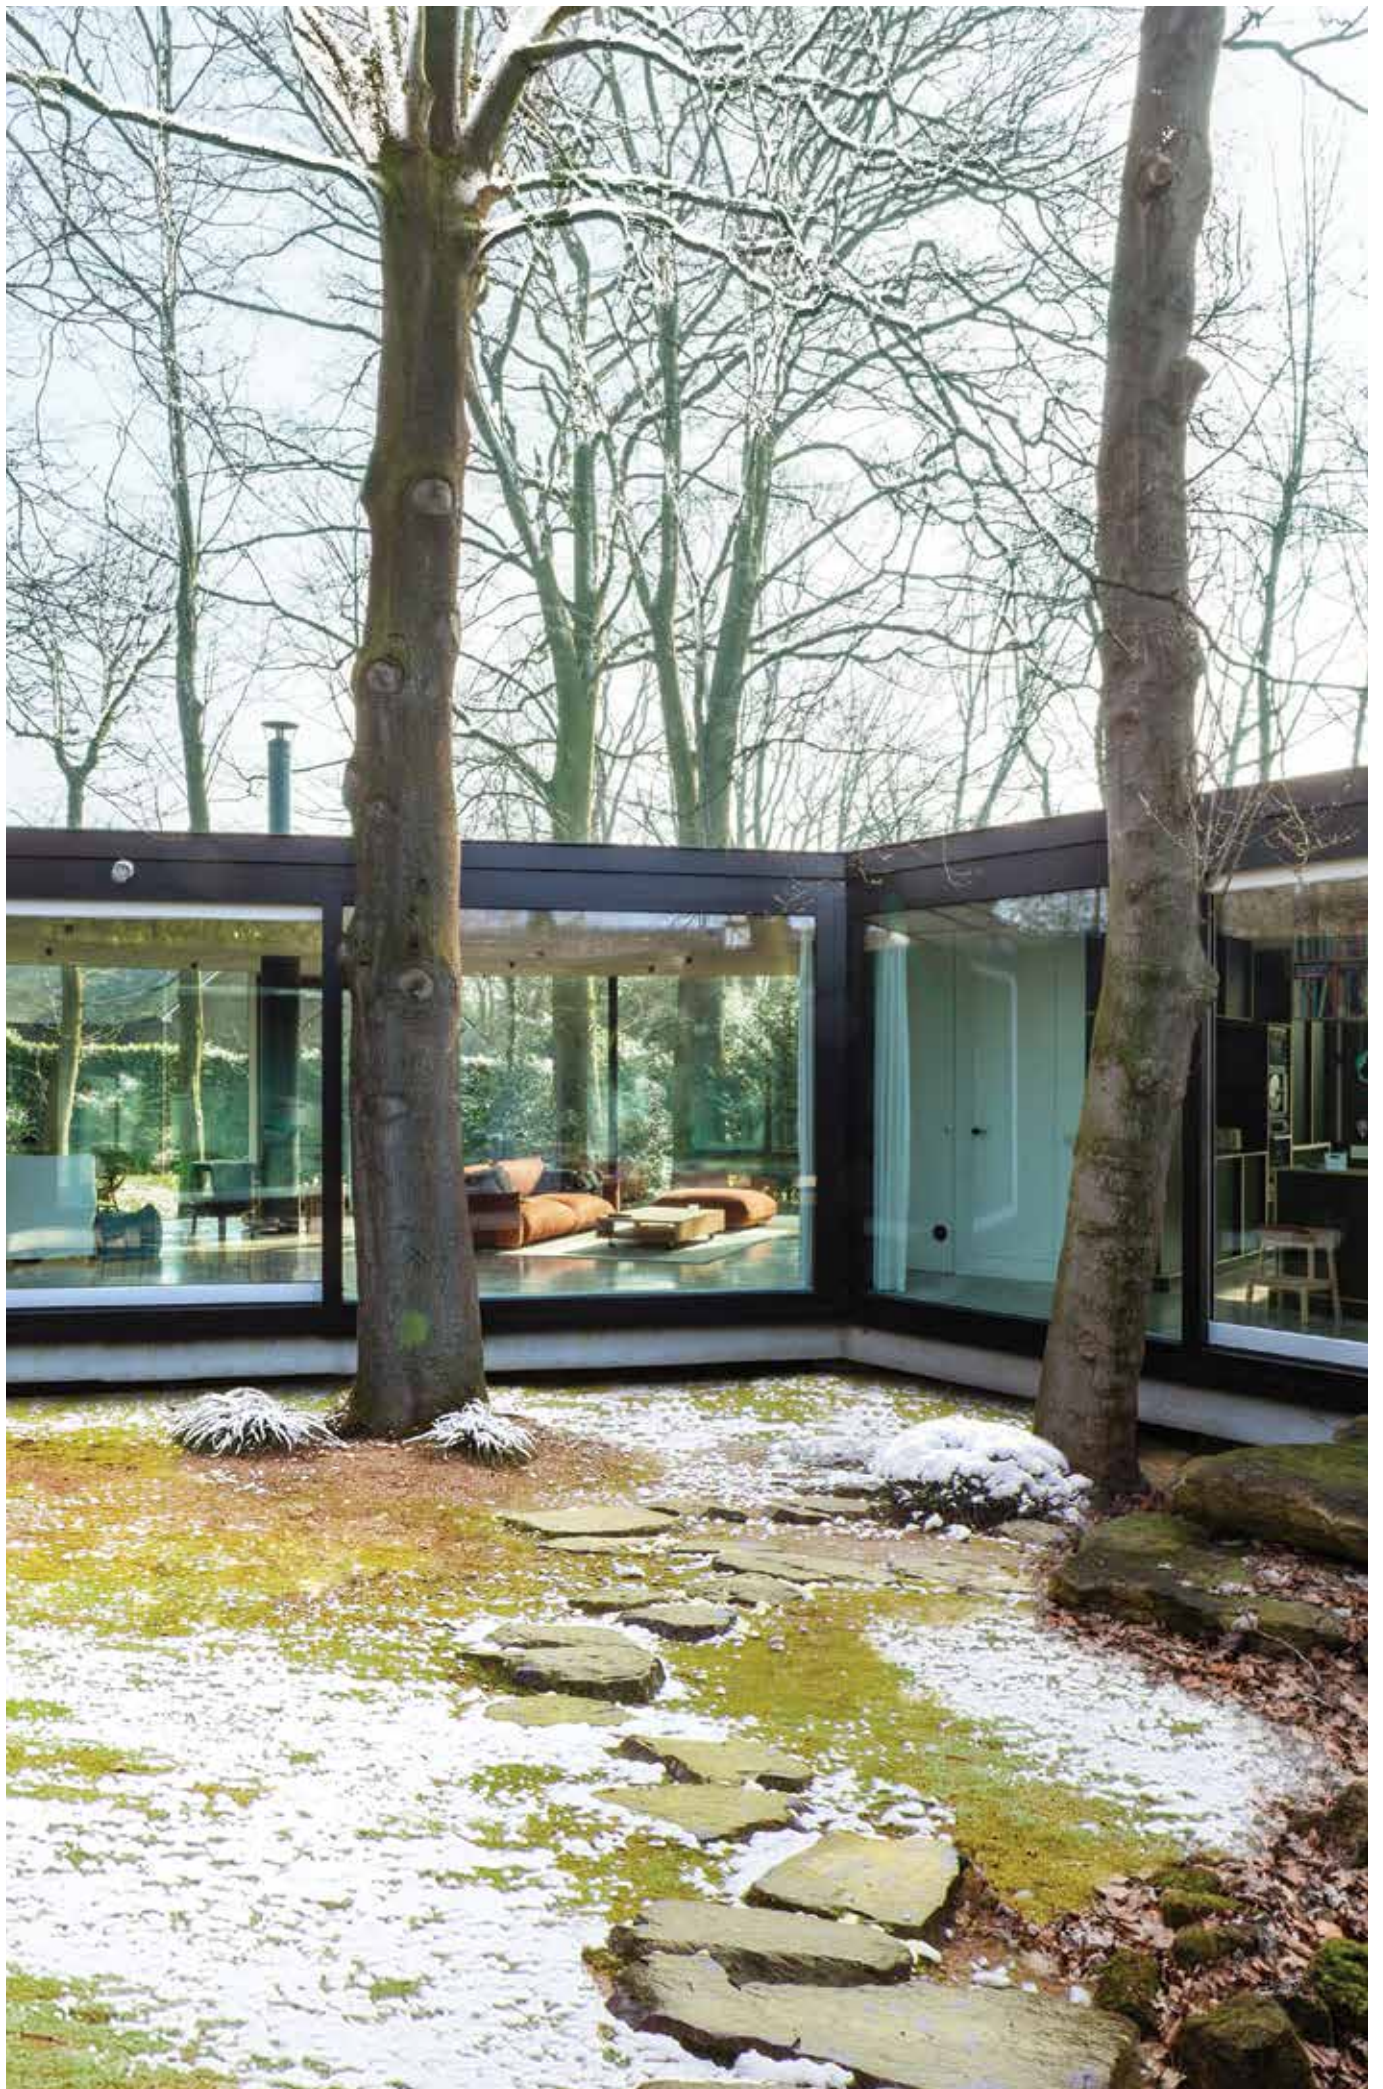


Table of content

heat pumps

Daikin Altherma 3 R	14
Daikin Altherma 3 R F	16
Daikin Altherma 3 R ECH ₂ O	22
Daikin Altherma 3 R W	30
Daikin Altherma 3 H NEW	36
Daikin Altherma 3 H F	38
Daikin Altherma 3 H W	44
Daikin Altherma R	50
Daikin Altherma R F	50
Daikin Altherma R ECH ₂ O	64
Daikin Altherma R W	70
Daikin Altherma M	80
Daikin Altherma R HT	86
Daikin Altherma M HW	90
Daikin Altherma R HW	92
Daikin Altherma R Flex Type HT HW	94
Daikin Altherma R Flex Type HW	96
Daikin Altherma Ground source heat pump NEW	98
Daikin Altherma 3 GEO	98
Daikin Altherma GEO	103
Daikin Altherma Hybrid heat pump	104
Daikin Altherma R Hybrid	104
Daikin Altherma R Hybrid + multi	108
Daikin Altherma H Hybrid	112

Daikin Altherma 3 R

powered by Bluevolution
with R-32 refrigerant

Why choose Daikin Altherma 3 R?

Bluevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R-32.



Unique on
the market

High performance

- › Delivering temperatures up to 65°C at high efficiency, the R-32 Daikin Altherma 3 is suitable for both underfloor heating and radiators and retains its pedigree trademark in frost protection down to -25°C, ensuring reliable operation even in the coldest climates.
- › The optimal combination of Bluevolution technology offers the highest performance:
 - » seasonal efficiency up to A+++ (energy label 2019)
 - » heating efficiency up to a COP of 5,1 (at 7°C/35°C)
 - » Domestic hot water efficiency up to COP of 3,3 (EN16147)
- › Available in 4, 6 and 8 kW

Easy to install

- › Delivered ready to work: all key hydraulic elements are already factory mounted
- › The new design enables that all servicing can be done from the front and all piping can be accessed at the top of the unit
- › Stylish modern outlook
- › The outdoor unit is tested and charged with refrigerant, installation time is reduced

Easy commissioning :

- › Integrated high resolution colour interface
- › Quick wizard allowing commissioning in maximum 9 easy steps to have the full system ready to work
- › Next to that the configuration can take place remotely to upload later on the unit after the day of the installation.

Easy to control

- › The combined effect of the Daikin Altherma weather dependent set-point controls and its inverter compressors maximises the efficiency of the new R-32 Daikin Altherma 3 at each outdoor temperature, assuring consistent room temperatures at all times.
- › To control on a daily basis your home temperature, settings can be done anywhere at any time via the Daikin Online Controller app. This online controller allows adjustment of home comfort levels to suit individual preferences while achieving further energy efficiencies. The R-32 Daikin Altherma 3 range can also be fully integrated with other home control systems



Control
via app

Daikin Altherma 3 R

offers a wide range to adapt to your customers needs

- **Best seasonal efficiencies** providing the highest savings on running costs
- Perfect fit for **new builds**, as well as for low energy houses
- A leaving water temperature up to 65°C makes it also **a perfect choice for refurbishments**



Heat pumps

To cover all applications, the Daikin Altherma 3 R is available in 3 different indoor units



Daikin Altherma 3 R F

Floor standing unit with integrated domestic hot water tank

Compact and yet 100 % comfort guaranteed

- › All components and connections are factory mounted
- › Very small 595 x 625 mm installation footprint required
- › Minimum electrical input with constantly available hot water
- › Dedicated Bi-Zone models available: two temperature zones automatically regulated by the same indoor unit
- › Modern stylish design available in white or silver-grey



Daikin Altherma 3 R ECH₂O

Floor standing unit with integrated ECH₂O tank

Integrated solar unit and domestic hot water tank

- Maximising renewable energy with top comfort for hot water preparation
- › Solar support for domestic hot water
 - › Lightweight plastic tank
 - › Bivalent option: can be combined with a secondary heat source
 - › App control available



Daikin Altherma 3 R W

Wall mounted unit

High flexibility for installation and domestic hot water connection

- › Compact unit with small installation (almost no side clearance is required)
- › Can be combined with a space separate domestic hot water tank up to 500 litres, with or without solar support
- › Stylish modern design

Daikin Altherma 3 R F floor standing unit

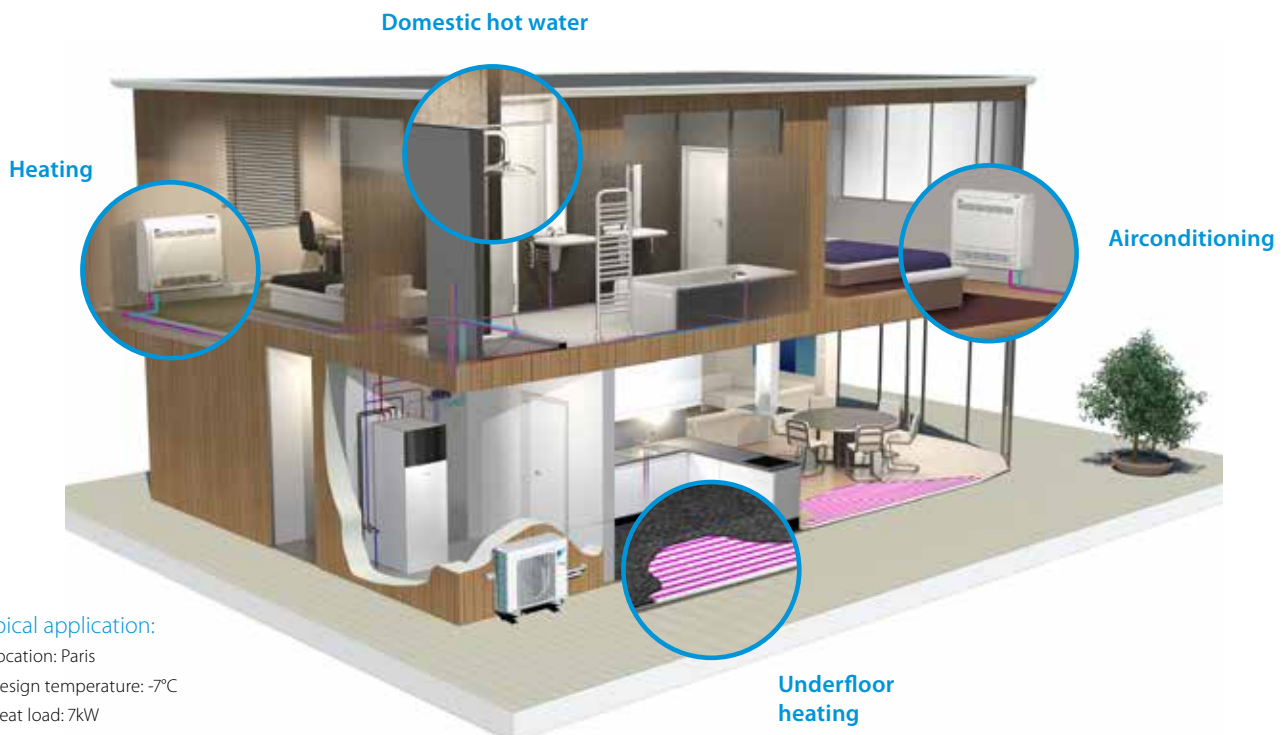
with integrated domestic hot water tank

Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for new build and low energy houses.

All in one system to save installation space and time

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heatpump ensures a faster installation compared to traditional systems.
- › Inclusion of all hydraulic components means no third party components are required.
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 3, 6, 9 kW as well as back-up heater less models are available
- › Dedicated Bi-Zone models allowing temperature monitoring for 2 zones connect underfloor heating to radiators for optimise efficiency



Typical application:

- › Location: Paris
- › Design temperature: -7°C
- › Heat load: 7kW
- › Heating off temperature: 16°C

All-in one design

Reduces the installation footprint and height

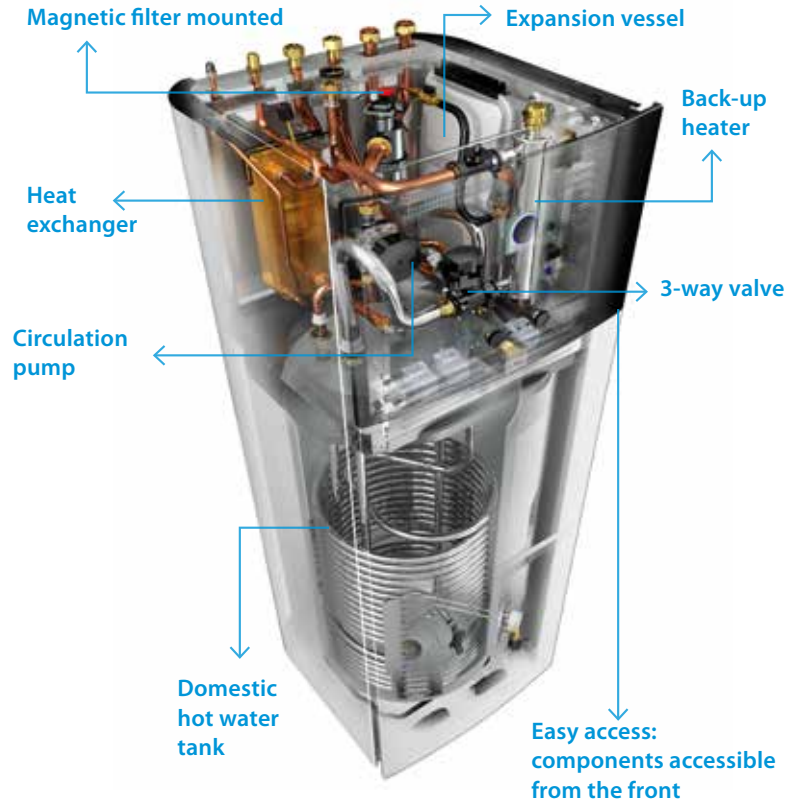
Compared to the traditional split version for a wall mounted indoor unit and a separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

With a small footprint of 595 x 600 mm, the integrated indoor unit has a similar footprint when compared to other household appliances.

For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit.

With an installation height of 1,65 m for an 180 L tank and 1,85 m for a 230 L tank, the required installation height is less than 2m.

The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easy blending in with other household appliances.



Heat pumps

Advanced user interface



The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.

Blue is perfect! Should the eye turn red, an error has occurred.

Quick to configure

Log in and you'll be able to completely configure the unit via the new MMI in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

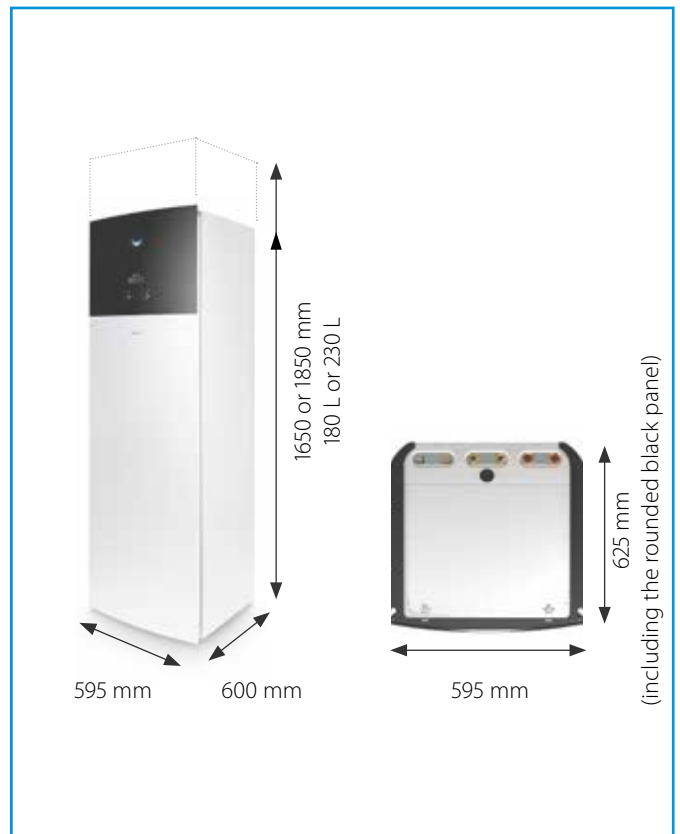
Easy operation

Work super-fast with the new MMI. It's super easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The MMI was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

Integrated indoor unit




Daikin Altherma 3

low temperature split


integrated floor standing unit



Floor standing air to water heat pump for **heating and hot water**; ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25°C



011-1W0218 → 222
011-1W0245, 247
011-1W0249 → 251



Efficiency data				EHVH + ERGA		04S18D6V(G)+ 04DV	04S23D6V(G)+ 04DV	08S18D6V(G)/D9W(G) + 06DV	08S23D6V(G)/D9W(G) + 06DV	08S18D6V(G)/D9W(G) + 08DV	08S23D6V(G)/D9W(G) + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)		
Power input	Heating	Nom.		kW	0.850 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)		
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)		
 Space heating	Average climate	General	SCOP		3.26				3.32		
	water outlet		ηs (Seasonal space heating efficiency)	%	127				130		
	55°C		Seasonal space heating eff. class		A++						
	Average climate	General	SCOP		4.48		4.47			4.56	
	water outlet		ηs (Seasonal space heating efficiency)	%	176				179		
	35°C		Seasonal space heating eff. class		A+++ (3)						
 Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL	
	Average climate	ηwh (water heating efficiency)			%	125	133	125	133	125	133
		Water heating energy efficiency class			A+ (3)						
Indoor Unit				EHVH	04S18D6V(G)	04S23D6V(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)	
Casing	Colour				White + Black						
	Material				Resin / Sheet metal						
Dimensions	Unit	HeightxWidthxDepth		mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	
Weight	Unit			kg	131	139	131	139	131	139	
Tank	Water volume			l	180	230	180	230	180	230	
	Maximum water temperature			°C	70						
	Maximum water pressure			bar	10						
	Corrosion protection				Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C	5~30						
		Water side	Min.~Max.	°C	15 ~65						
	Domestic hot water	Ambient	Min.~Max.	°CDB	5~35						
		Water side	Max.	°C	70						
Sound power level	Nom.			dBA	42						
Sound pressure level	Nom.			dBA	28						
Outdoor Unit				ERGA	04DV		06DV		08DV		
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388						
Weight	Unit			kg	58.5						
Compressor	Quantity				1						
	Type				Hermetically sealed swing compressor						
Operation range	Cooling	Min.~Max.		°CDB	10~43						
	Domestic hot water	Min.~Max.		°CDB	-25~35						
Refrigerant	Type				R-32						
	GWP				675.0						
	Charge			kg	1.50						
	Charge			TCO ₂ Eq	1.01						
	Control				Expansion valve						
Sound power level	Heating	Nom.		dBA	58		60		62		
	Cooling	Nom.		dBA	61				62		
Sound pressure level	Heating	Nom.		dBA	44		47		49		
	Cooling	Nom.		dBA	48		49		50		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230						
Current	Recommended fuses			A	25						

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3

low temperature split

integrated floor standing unit

Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 3, 6, 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25°C



011-1W0218 → 222
011-1W0245, 247
011-1W0249 → 251



A+++

(3)





A+

(3)

65°C

R-32

Efficiency data				EHVX + ERGA	04S18D3V(G)/ D6V(G) + 04DV	04S23D3V(G)/ D6V(G) + 04DV	08S18D6V(G)/ D9W(G) + 06DV	08S23D6V(G)/ D9W(G) + 06DV	08S18D6V(G)/ D9W(G) + 08DV	08S23D6V(G)/ D9W(G) + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0,850 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
Cooling capacity	Nom.			kW	5.56 (1) / 4.37 (2)		5.96 (1) / 4.87 (2)		6.25 (1) / 5.35 (2)	
Power input	Cooling	Nom.		kW	0,940 (1) / 1.14 (2)		1.06 (1) / 1.33 (2)		1.16 (1) / 1.51 (2)	
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
EER					5.94 (1) / 3.84 (2)		5.61 (1) / 3.67 (2)		5.40 (1) / 3.54 (2)	
 Space heating	Average climate water outlet 55°C	General	SCOP		3.26				3.32	
			η _s (Seasonal space heating efficiency)	%	127				130	
	Average climate water outlet 35°C		Seasonal space heating eff. class		A++					
		General	SCOP		4.48		4.47		4.56	
			η _s (Seasonal space heating efficiency)	%	176				179	
			Seasonal space heating eff. class		A+++ (3)					
 Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average climate	η _{wh} (water heating efficiency)			127	134	125	133	125	133
		Water heating energy efficiency class			A+ (3)					

Indoor Unit				EHVX	04S18D3V(G)/ D6V(G)	04S23D3V(G)/ D6V(G)	08S18D6V(G)/ D9W(G)	08S23D6V(G)/ D9W(G)	08S18D6V(G)/ D9W(G)	08S23D6V(G)/ D9W(G)
Casing	Colour	White + Black								
	Material	Resin / Sheet metal								
Dimensions	Unit	HeightxWidthxDepth	mm		1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625
Weight	Unit		kg		131	139	131	139	131	139
Tank	Water volume		l		180	230	180	230	180	230
	Maximum water temperature		°C		70					
	Maximum water pressure		bar		10					
	Corrosion protection				Pickling					
Operation range	Heating	Ambient	Min.~Max.	°C	5~30					
		Water side	Min.~Max.	°C	15~65					
	Cooling	Ambient	Min.~Max.	°CDB	5~35					
		Water side	Min.~Max.	°C	5~22					
	Domestic hot water	Ambient	Min.~Max.	°CDB	5~35					
		Water side	Max.	°C	70					
Sound power level	Nom.			dBA	42					
Sound pressure level	Nom.			dBA	28					

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388			
Weight	Unit		kg	58.5			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Cooling	Min.~Max.	°CDB	10~43			
	Domestic hot water	Min.~Max.	°CDB	-25~35			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge		kg	1.50			
	Charge		TCO ₂ Eq	1.01			
	Control			Expansion valve			
Sound power level	Heating	Nom.	dBA	58	60	62	
	Cooling	Nom.	dBA	61		62	
Sound pressure level	Heating	Nom.	dBA	44	47	49	
	Cooling	Nom.	dBA	48	49	50	
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1N~/50/230			
Current	Recommended fuses		A	25			


(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)



(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split integrated Bi-Zone

Floor standing integrated with **two different temperature zones monitoring**

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
















Efficiency data				EHVZ + ERGA		04S18D6V(G) + 04DV	08S18D6V(G)/D9W(G) + 06DV	08S23D6V(G)/D9W(G) + 06DV	08S18D6V(G)/D9W(G) + 08DV	08S23D6V(G)/D9W(G) + 08DV		
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)			
Power input	Heating	Nom.		kW	0.850 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)			
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)			
	Average climate	General	SCOP		3.26		3.32					
	water outlet		ηs (Seasonal space heating efficiency)	%	127		130					
	55°C		Seasonal space heating eff. class		A++							
	Average climate	General	SCOP		4.48	4.47		4.56				
	water outlet		ηs (Seasonal space heating efficiency)	%	176		179					
	35°C		Seasonal space heating eff. class		A+++ (3)							
	General	Declared load profile			L		XL		L		XL	
	Average climate	ηwh (water heating efficiency)			125		133		125		133	
		Water heating energy efficiency class			A+ (3)							
Indoor Unit				EHVZ	04S18D6V(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)	08S18D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)	08S23D6V(G)/D9W(G)		
Casing	Colour				White + Black							
	Material				Resin / Sheet metal							
Dimensions	Unit	HeightxWidthxDepth		mm	1,650x595x625		1,850x595x625		1,650x595x625		1,850x595x625	
Weight	Unit			kg	136		144		136		144	
Tank	Water volume			l	180		230		180		230	
	Maximum water temperature			°C	70							
	Maximum water pressure			bar	10							
	Corrosion protection				Pickling							
Operation range	Heating	Ambient	Min.~Max.	°C	5~30							
		Water side	Min.~Max.	°C	15 ~65							
	Domestic hot water	Ambient	Min.~Max.	°CDB	5~35							
		Water side	Max.	°C	70							
Sound power level	Nom.			dBA	42							
Sound pressure level	Nom.			dBA	28							
Outdoor Unit				ERGA	04DV	06DV		08DV				
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388							
Weight	Unit			kg	58.5							
Compressor	Quantity				1							
	Type				Hermetically sealed swing compressor							
Operation range	Cooling	Min.~Max.		°CDB	10~43							
	Domestic hot water	Min.~Max.		°CDB	-25~35							
Refrigerant	Type				R-32							
	GWP				675.0							
	Charge			kg	1.50							
	Charge			TCO ₂ Eq	1.01							
	Control				Expansion valve							
Sound power level	Heating	Nom.		dBA	58	60		62				
	Cooling	Nom.		dBA	61			62				
Sound pressure level	Heating	Nom.		dBA	44	47				49		
	Cooling	Nom.		dBA	48	49				50		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230							
Current	Recommended fuses			A	25							

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

	Type	Material name	Daikin Altherma 3 R F	
Controls		Remote user interface	BRC1HHDW/S/K	●
		LAN Adapter + PV Solar connection	BRP069A61	●
		LAN only	BRP069A62	●
		Room thermostat (wired)	EKRTWA	●
		Room thermostat (wireless)	EKRTR1	●
		External sensor	EKRTETS	●
Adapter		Demand PCB	EKRP1AHTA	●
		Digital I/O PCB	EKRP1HBAA	●
Back-up heater		Back-up heater kit	EKLBUHCB6W1	• only for EHVH-DV(G)
Installation		Bi-Zone kit (watts kit)	BZKA7V3	• (excluding EHVZ)
Sensors		Remote indoor sensor	KRCS01-1	●
		Remote outdoor sensor	EKRSCA-1	●
Others		PC USB Cable	EKPCCAB4	●
			EKHBCONV	
		Conversion kit	EKHVCONV	●
		Low sound cover for ERGA-D	EKLN-A	●

Daikin Altherma 3 R ECH₂O

The Daikin Altherma low temperature split integrated ECH₂O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling.

Intelligent storage management

- › The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
- › Continuous heating during defrost mode and use of stored heat for space heating (500l tank only)
- › Electronic management of both heat pump and ECH₂O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
- › Achieves the highest standards for water sanitation
- › Uses more renewable energy with solar connection

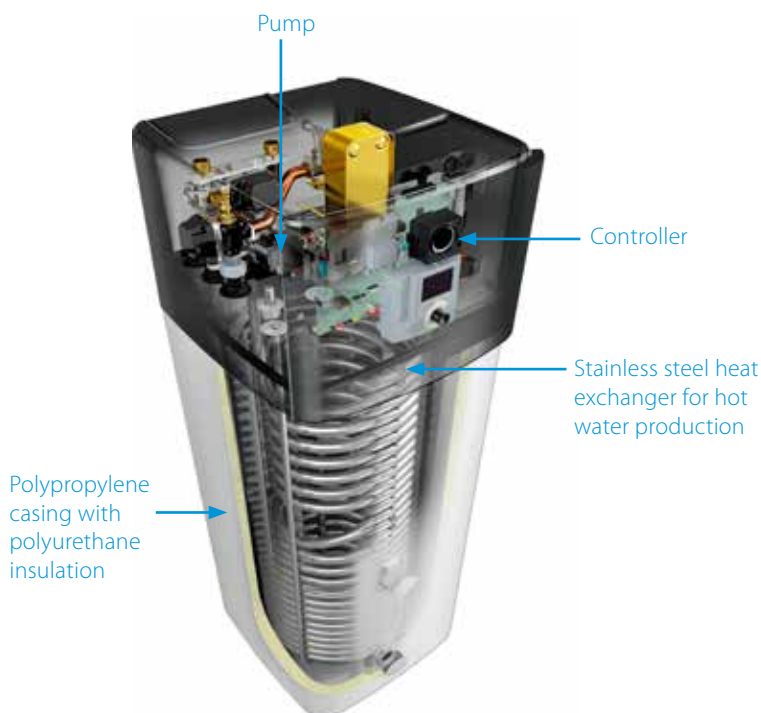
Innovative and high-quality tank

- › Lightweight plastic tank
- › No corrosion, anode, scale or lime deposits
- › Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

Combinable with other heat sources

- › The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

ECH₂O



Advanced user interface



The Daikin-Eye

The intuitive Daikin eye shows you in real time the status of your system. Blue is perfect! Should the eye turn red, an error has occurred.

Quick to configure

Log in and you'll be able to completely configure the unit in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

Easy operation

The user interface works really fast thanks to its icon-based menus.

Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

ECH₂O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

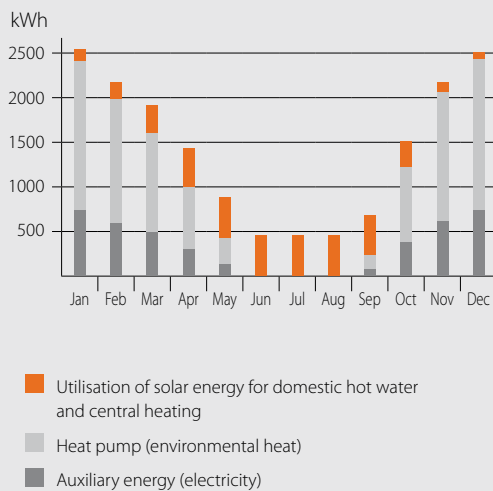
Pressureless (drain-back) solar system (EHS-D, EHSX-D)

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

Pressurised solar system (EHSB-D, EHSXB-D)


- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed

Monthly energy consumption of an average detached house



System diagram: HPSU compact with solar thermal

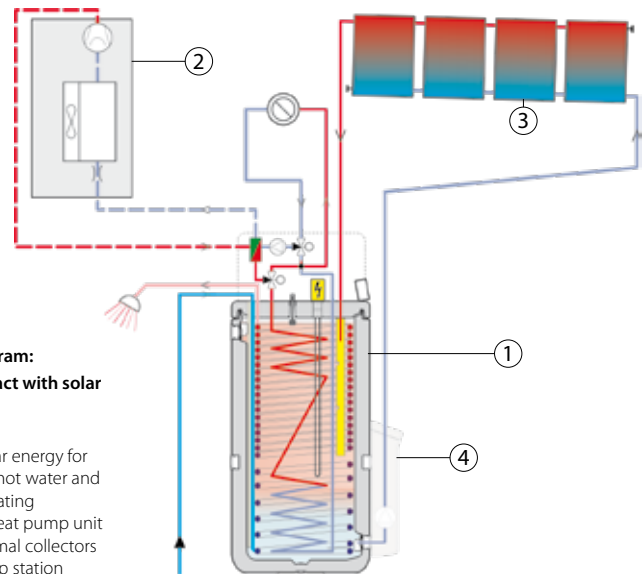- 1 Use of solar energy for domestic hot water and central heating
- 2 External heat pump unit
- 3 Solar thermal collectors
- 4 Solar pump station




Daikin Altherma

low temperature

split integrated ECH₂O

Floor standing air to water heat pump for **heating and hot water** with thermal solar support

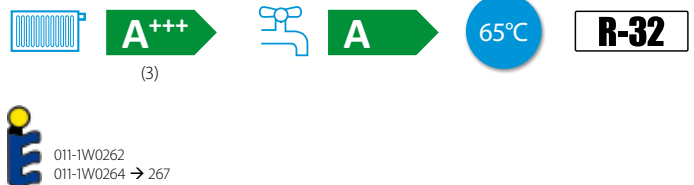- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



Efficiency data				EHSH + ERGA	04P30D + 04DV	08P30D + 06DV	08P50D + 06DV	08P30D + 08DV	08P50D + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.			kW	0.85 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.26			3.32	
			η _{sp} (Seasonal space heating efficiency)	%	127			130	
			Seasonal space heating eff. class		A++				
	Average climate water outlet 35°C	General	SCOP		4.48	4.47		4.56	
			η _{sp} (Seasonal space heating efficiency)	%	176			179	
			Seasonal space heating eff. class		A+++ (3)				
Domestic hot water heating	General Average climate	Declared load profile		L		XL	L	XL	
		η _{wh} (water heating efficiency)	%	108		106	108	106	
		Water heating energy efficiency class		A					

Indoor Unit				EHS-D	04P30D	08P30D	08P50D	08P30D	08P50D
Casing	Colour				Traffic white (RAL9016) / Dark grey (RAL7011)				
	Material				Impact resistant polypropylene				
Dimensions	Unit	HeightxWidthxDepth	mm		1891x595x615		1896x790x790	1891x595x615	1896x790x790
Weight	Unit		kg		73		93	73	93
Tank	Water volume		l		294		477	294	477
	Maximum water temperature		°C				85		
Operation range	Heating	Ambient	Min.~Max.	°C	-25~-25				
		Water side	Min.~Max.	°C	18~-65				
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~-35				
		Water side	Min.~Max.	°C	25~55				
Sound power level	Nom.			dBA	39.1				
Sound pressure level	Nom.			dBA	28				

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388			
Weight	Unit		kg	58.5			
Compressor	Quantity			1			
	Type			Hermetically sealed swing compressor			
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0			
	Domestic hot water	Min.~Max.	°CDB	-25 ~35			
Refrigerant	Type			R-32			
	GWP			675.0			
	Charge		kg	1.50			
	Charge		TCO ₂ Eq	1.01			
	Control			Expansion valve			
Sound power level	Heating	Nom.	dBA	58	60	62	
	Cooling	Nom.	dBA	61	62		
Sound pressure level	Heating	Nom.	dBA	44	47	49	
	Cooling	Nom.	dBA	48	49	50	
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1N~/50/230			
Current	Recommended fuses		A	25			

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma

low temperature


split integrated ECH₂O

Floor standing air to water heat pump for **bivalent heating and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



011-1W0262
011-1W0264 → 267

Efficiency data				EHSB + ERGA	04P30D + 04DV	08P30D + 06DV	08P50D + 06DV	08P30D + 08DV	08P50D + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
 Space heating	Average climate water outlet 55°C	General	SCOP		3.26		3.32		
			η _s (Seasonal space heating efficiency)	%	127		130		
			Seasonal space heating eff. class	A++					
	Average climate water outlet 35°C	General	SCOP		4.48	4.47		4.56	
			η _s (Seasonal space heating efficiency)	%	176		179		
			Seasonal space heating eff. class	A+++ (3)					
			Declared load profile		L	XL	L	XL	
Domestic hot water heating	Average	η _{wh} (water heating efficiency)	%	108		109		108	
	climate	Water heating energy efficiency class			A				

Indoor Unit				EHSB	04P30D	08P30D	08P50D	08P30D	08P50D
Casing	Colour	Traffic white (RAL9016) / Dark grey (RAL7011)							
	Material	Impact resistant polypropylene							
Dimensions	Unit	HeightxWidthxDepth	mm		1891x595x615		1896x790x790	1891x595x615	1896x790x790
Weight	Unit		kg		73		93	73	93
Tank	Water volume		l		294		477	294	477
	Maximum water temperature		°C				85		
Operation range	Heating	Ambient	Min.~Max.	°C			-25~-25		
		Water side	Min.~Max.	°C			18~-65		
	Domestic hot water	Ambient	Min.~Max.	°CDB			-25~-35		
		Water side	Min.~Max.	°C			25~-55		
Sound power level	Nom.			dBA			39.1		
Sound pressure level	Nom.			dBA			28		

Outdoor Unit				ERGA	04DV	06DV	08DV
Dimensions	Unit	HeightxWidthxDepth	mm			740x884x388	
Weight	Unit		kg			58.5	
Compressor	Quantity					1	
	Type					Hermetically sealed swing compressor	
Operation range	Cooling	Min.~Max.	°CDB			10.0~43.0	
	Domestic hot water	Min.~Max.	°CDB			-25 ~35	
Refrigerant	Type					R-32	
	GWP					675.0	
	Charge		kg			1.50	
	Charge Control		TCO ₂ Eq			1.01	
						Expansion valve	
Sound power level	Heating	Nom.	dBA		58	60	62
	Cooling	Nom.	dBA		61		62
Sound pressure level	Heating	Nom.	dBA		44	47	49
	Cooling	Nom.	dBA		48	49	50
Power supply	Name/Phase/Frequency/Voltage		Hz/V			V3/1N~/50/230	
Current	Recommended fuses		A			25	

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for **heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating, hot water and cooling
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



A+++
(3)



A

65°C

R-32



011-1W0262 → 267

Efficiency data				EHSX + ERGA	04P30D + 04DV	04P50D + 04DV	08P30D + 06DV	08P50D + 06DV	08P30D + 08DV	08P50D + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
Cooling capacity	Nom.			kW	5.56 (1) / 4.37 (2)		5.96 (1) / 4.87 (2)		6.25 (1) / 5.35 (2)	
Power input	Cooling	Nom.		kW	0.94 (1) / 1.14 (2)		1.06 (1) / 1.33 (2)		1.16 (1) / 1.51 (2)	
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
EER					5.94 (1) / 3.84 (2)		5.61 (1) / 3.67 (2)		5.40 (1) / 3.54 (2)	
Space heating	Average climate	General	SCOP			3.26				3.32
	water outlet		η _{sp} (Seasonal space	%		127				130
	55°C		heating efficiency)							
			Seasonal space heating eff. class				A++			
Domestic hot water heating	Average climate	General	SCOP		4.48		4.47		4.56	
	water outlet		η _{sp} (Seasonal space	%		176			179	
	35°C		heating efficiency)							
			Seasonal space heating eff. class				A+++ (3)			
Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average climate	η _{wh} (water heating efficiency)	%		108	106	108	106	108	106
		Water heating energy efficiency class					A			

Indoor Unit				EHSX	04P30D	04P50D	08P30D	08P50D	08P30D	08P50D
Casing	Colour				Traffic white (RAL9016) / Dark grey (RAL7011)					
	Material				Impact resistant polypropylene					
Dimensions	Unit	HeightxWidthxDepth	mm		1891x595x615	1896x790x790	1891x595x615	1896x790x790	1891x595x615	1896x790x790
Weight	Unit		kg		73	93	73	93	73	93
Tank	Water volume		l		294	477	294	477	294	477
Operation range	Maximum water temperature			°C	85					
	Heating	Ambient	Min.~Max.	°C	-25~-25					
		Water side	Min.~Max.	°C	18~-65					
	Cooling	Ambient	Min.~Max.	°CDB	10~43					
		Water side	Min.~Max.	°C	5~22					
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~35					
		Water side	Min.~Max.	°C	25~55					
Sound power level	Nom.		dBA	39.1						
Sound pressure level	Nom.		dBA	28						
Outdoor Unit				ERGA	04DV		06DV		08DV	
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388						
Weight	Unit		kg	58.5						
Compressor	Quantity			1						
	Type			Hermetically sealed swing compressor						
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0						
	Domestic hot water	Min.~Max.	°CDB	-25 ~35						
Refrigerant	Type			R-32						
	GWP			675.0						
	Charge		kg	1.50						
	Charge		TCO ₂ Eq	1.01						
Sound power level	Heating	Nom.	dBA	58		60		62		
	Cooling	Nom.	dBA	61				62		
Sound pressure level	Heating	Nom.	dBA	44		47		49		
	Cooling	Nom.	dBA	48		49		50		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230					
Current	Recommended fuses			A	25					

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma

low temperature

split integrated ECH₂O

Floor standing air to water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



A+++

(3)



A

65°C

R-32



011-IW0262 → 267

Efficiency data				EHSXB + ERGA	04P30D + 04DV	04P50D + 04DV	08P30D + 06DV	08P50D + 06DV	08P30D + 08DV	08P50D + 08DV
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)		6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)	
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)		1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)	
Cooling capacity	Nom.			kW	5.56 (1) / 4.37 (2)		5.96 (1) / 4.87 (2)		6.25 (1) / 5.35 (2)	
Power input	Cooling	Nom.		kW	0.94 (1) / 1.14 (2)		1.06 (1) / 1.33 (2)		1.16 (1) / 1.51 (2)	
COP					5.10 (1) / 3.65 (2)		4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)	
EER					5.94 (1) / 3.84 (2)		5.61 (1) / 3.67 (2)		5.40 (1) / 3.54 (2)	
Space heating	Average climate water outlet 55°C	General	SCOP	%		3.26				3.32
			η _{sp} (Seasonal space heating efficiency)	%		127				130
	Average climate water outlet 35°C	General	SCOP	%	4.48		4.47		4.56	
			η _{sp} (Seasonal space heating efficiency)	%		176			179	
Domestic hot water heating	General	Declared load profile	Water heating energy efficiency class	%	A+++ (3)					
					L	XL	L	XL	L	XL
	Average climate	Average climate	Average climate	%	108	109	108	109	108	109
					A					

Indoor Unit				EHSXB	04P30D	04P50D	08P30D	08P50D	08P30D	08P50D
Casing	Colour				Traffic white (RAL9016) / Dark grey (RAL7011)					
	Material				Impact resistant polypropylene					
Dimensions	Unit	HeightxWidthxDepth	mm		1891x595x615	1896x790x790	1891x595x615	1896x790x790	1891x595x615	1896x790x790
Weight	Unit		kg		76	99	76	99	76	99
Tank	Water volume		l		294	477	294	477	294	477
Operation range	Maximum water temperature			°C	85					
	Heating	Ambient	Min.~Max.	°C	-25~25					
		Water side	Min.~Max.	°C	18~65					
	Cooling	Ambient	Min.~Max.	°CDB	10~43					
		Water side	Min.~Max.	°C	5~22					
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~35					
		Water side	Min.~Max.	°C	25~55					
Sound power level	Nom.		dBA	39.1						
Sound pressure level	Nom.		dBA	28						
Outdoor Unit				ERGA	04DV		06DV		08DV	
Dimensions	Unit	HeightxWidthxDepth	mm	740x884x388						
Weight	Unit		kg	58.5						
Compressor	Quantity			1						
	Type			Hermetically sealed swing compressor						
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0						
	Domestic hot water	Min.~Max.	°CDB	-25 ~35						
Refrigerant	Type			R-32						
	GWP			675.0						
	Charge		kg	1.50						
	Charge		TCO ₂ Eq	1.01						
Sound power level	Control			Expansion valve						
	Heating	Nom.	dBA	58	60	62	62	49	50	
Sound pressure level	Cooling	Nom.	dBA	61						
	Heating	Nom.	dBA	44	47			49		
	Cooling	Nom.	dBA	48	49			50		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230					
Current	Recommended fuses			A	25					

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

Type	Daikin Altherma 3 R ECH ₂ O		Material name
Controls		Room thermostat	RoCon U1 / EHS157034
		Mixer module	RoCon M1 / EHS157068
		Remote outdoor sensor	EKRSC1
		Gateway for apps	RoCon G1 / EHS157056
Back-up heater		Back-up heater 1 kW + Switchbox	EKBUB1C + EKBUHSWB
		Back-up heater 3 kW + Switchbox	EKBUB3C + EKBUHSWB
		Back-up heater 9 kW + Switchbox	EKBUB9C + EKBUHSWB
Hydraulics		Hydraulic separator	HWC / 172900
		Heat insulation for HWC	WHWC / 172901
Pump group		Pump group with mixer module	156075
		Pump group without mixer module	156077
Additional connections		Dirt separator SAS1	SAS1 / 156021
		Dirt separator SAS2	SAS2 / 156023
		Biv connector kit	141589
		DB connector kit	141590
		Terminal connection kit	141592
		Connector external heater	141591
Other		Low sound cover for ERGA-D	EKLN-A



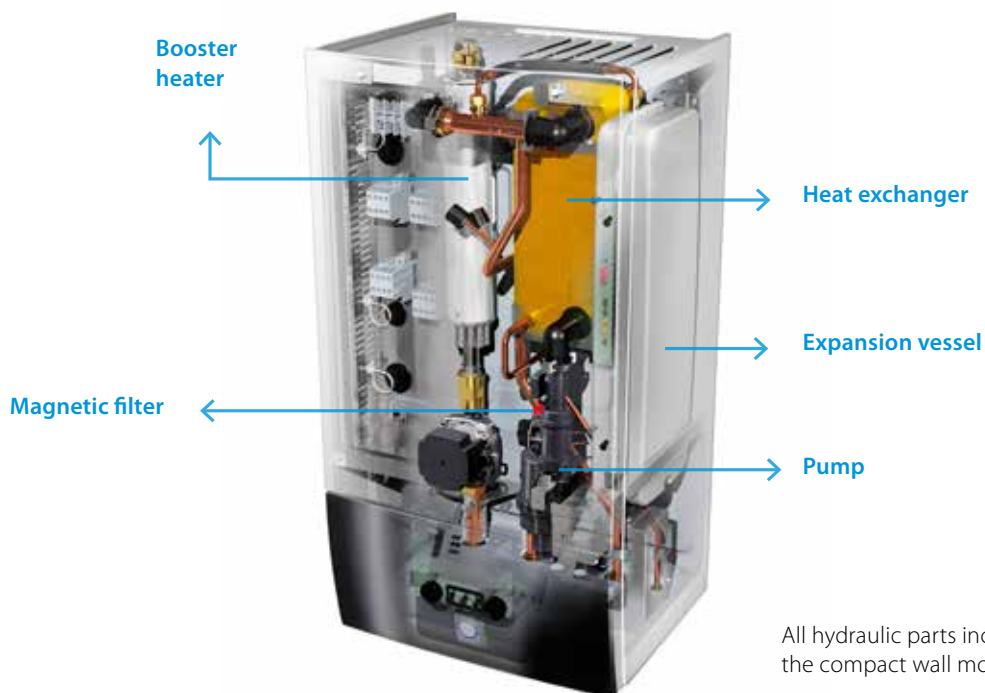
Daikin Altherma 3 R W wall mounted unit

Why choose Daikin wall mounted unit?

The Daikin Altherma 3 split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water.

High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required.
- › The unit's sleek design blends in with other household appliances.
- › Combine with a stainless steel or ECH₂O thermal store



All hydraulic parts included in the compact wall mounted unit

Flexibility in providing domestic hot water

If the end user only requires hot water and installation height is limited, a separate tank can provide the required installation flexibility. At the side of our standard stainless steel tanks, we propose the ECH₂O thermal stores.

ECH₂O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: with high tapping performance
- › Fit for future possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build on the unit combined with cascade principle offers flexible installation options



Heat pumps

Example of installation with a stainless steel domestic hot water tank.



Daikin Altherma 3

low temperature split

wall mounted unit

Wall mounted **heating only** air-to-water heat pump ideal for low energy houses

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required.
- › The unit's sleek design blends in with other household appliances.
- › Combine with a stainless steel tank or ECH₂O thermal store.
- › Outdoor unit extracts heat from the outdoor air, even at -25°C




011-1W0218-219
011-1W0221
011-1W0246-247



(3)



Efficiency data				EHBH + ERGA	04D6V + 04DV	08D6V + 06DV	08D9W + 06DV	08D6V + 08DV	08D9W + 08DV	
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)		
Power input	Heating	Nom.		kW	0.85 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)		
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)		
 Space heating	Average climate	General	SCOP		3.26		3.32			
	water outlet		ηs (Seasonal space heating efficiency)	%	127		130			
	55°C		Seasonal space heating eff. class		A++					
	Average climate	General	SCOP		4.48	4.47		4.56		
	water outlet		ηs (Seasonal space heating efficiency)	%	176		179			
	35°C		Seasonal space heating eff. class		A+++ (3)					
Indoor Unit				EHBH	04D6V	08D6V	08D9W	08D6V	08D9W	
Casing	Colour				White + Black					
	Material				Resin, sheet metal					
Dimensions	Unit	HeightxWidthxDepth		mm	840x440x390					
Weight	Unit	kg			42.0		42.4	42.0	42.4	
Operation range	Heating	Water side Min.~Max.		°C	15 ~65					
	Domestic hot water	Water side Min.~Max.		°C	25~75					
Sound power level	Nom.	dBA			42					
Sound pressure level	Nom.	dBA			28					
Outdoor Unit				ERGA	04DV	06DV		08DV		
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388					
Weight	Unit	kg			58.5					
Compressor	Quantity				1					
	Type				Hermetically sealed swing compressor					
Operation range	Cooling	Min.~Max.		°CDB	10~43					
	Domestic hot water	Min.~Max.		°CDB	-25~35					
Refrigerant	Type				R-32					
	GWP				675.0					
	Charge	kg			1.50					
	Charge	TCO2Eq			1.01					
	Control				Expansion valve					
Sound power level	Heating	Nom.	dBA	58	60	62				
	Cooling	Nom.	dBA	61	62					
Sound pressure level	Heating	Nom.	dBA	44	47	49				
	Cooling	Nom.	dBA	48	49	50				
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230					
Current	Recommended fuses			A	25					

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split wall mounted unit

Wall mounted **reversible** air-to-water heat pump ideal
for low energy houses


- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required.
- › The unit's sleek design blends in with other household appliances.
- › Combine with a stainless steel tank or ECH₂O thermal store.
- › Outdoor unit extracts heat from the outdoor air, even at -25°C



011-1W0218-219
011-1W0221
011-1W0246-247
















Heat pumps

Efficiency data				EBHX + ERGA	04D6V + 04DV	08D6V + 06DV	08D9W + 06DV	08D6V + 08DV	08D9W + 08DV	
Heating capacity	Nom.			kW	4.30 (1) / 4.60 (2)	6.00 (1) / 5.90 (2)		7.50 (1) / 7.80 (2)		
Power input	Heating	Nom.		kW	0.850 (1) / 1.26 (2)	1.24 (1) / 1.69 (2)		1.63 (1) / 2.23 (2)		
Cooling capacity	Nom.			kW	5.56 (1) / 4.37 (2)	5.96 (1) / 4.87 (2)		6.25 (1) / 5.35 (2)		
Power input	Cooling	Nom.		kW	0.940 (1) / 1.14 (2)	1.06 (1) / 1.33 (2)		1.16 (1) / 1.51 (2)		
COP					5.10 (1) / 3.65 (2)	4.85 (1) / 3.50 (2)		4.60 (1) / 3.50 (2)		
EER					5.94 (1) / 3.84 (2)	5.61 (1) / 3.67 (2)		5.40 (1) / 3.54 (2)		
	Average climate water outlet 55°C	General	SCOP	%	3.26			3.32		
			ηs (Seasonal space heating efficiency)		127			130		
			Seasonal space heating eff. class		A++					
	Average climate water outlet 35°C	General	SCOP	%	4.48	4.47		4.56		
			ηs (Seasonal space heating efficiency)		176		179			
			Seasonal space heating eff. class		A+++ (3)					
Indoor Unit					EBHX	04D6V	08D6V	08D9W	08D6V	08D9W
Casing	Colour				White + Black					
	Material				Resin, sheet metal					
Dimensions	Unit	HeightxWidthxDepth		mm	840x440x390					
Weight	Unit			kg	42.0		42.4	42.0	42.4	
Operation range	Heating	Water side	Min.~Max.	°C	15 ~65					
	Domestic hot water	Water side	Min.~Max.	°C	25~75					
Sound power level	Nom.			dBA	42					
Sound pressure level	Nom.			dBA	28					
Outdoor Unit					ERGA	04DV	06DV		08DV	
Dimensions	Unit	HeightxWidthxDepth		mm	740x884x388					
Weight	Unit			kg	58.5					
Compressor	Quantity				1					
	Type				Hermetically sealed swing compressor					
Operation range	Cooling	Min.~Max.		°CDB	10~43					
	Domestic hot water	Min.~Max.		°CDB	-25~35					
Refrigerant	Type				R-32					
	GWP				675.0					
	Charge			kg	1.50					
	Charge			TCO2Eq	1.01					
	Control				Expansion valve					
Sound power level	Heating	Nom.		dBA	58	60		62		
	Cooling	Nom.		dBA	61			62		
Sound pressure level	Heating	Nom.		dBA	44	47		49		
	Cooling	Nom.		dBA	48	49		50		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230					
Current	Recommended fuses			A	25					

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

		Type	Material name	Daikin Altherma 3 R W
Controls		Remote user interface	BRC1HHDW/S/K	●
		LAN Adapter + PV Solar connection	BRP069A61	●
		LAN only	BRP069A62	●
		Room thermostat (wired)	EKRTWA	●
		Room thermostat (wireless)	EKRTR1	●
		External sensor	EKRTETS	●
Adapter		Demand PCB	EKRP1AHTA	●
		Digital I/O PCB	EKRP1HBAA	●
Back-up heater		Back-up heater kit	EKLBUHCB6W1	
Installation		Bi-Zone kit (watts kit)	BZKA7V3	●
Sensors		Remote indoor sensor	KRCS01-1	●
		Remote outdoor sensor	EKRSCA-1	●
Others		PC USB Cable	EKPCCAB4	●
		Conversion kit	EKHBCONV	●
			EKHVCONV	
		Low sound cover for ERGA-D	EKLN-A	●



Daikin Altherma 3 H EPGA-D 11-14-16 kW

powered by Bluevolution with R-32

R-32, the environmentally-friendly refrigerant

Bluevolution

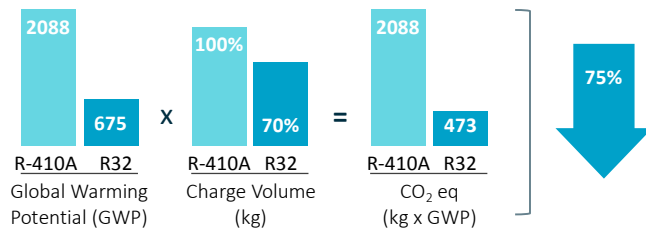
The Bluevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R-32.

BLUEEVOLUTION

R-32

Environmentally-friendly

Thanks to the combination of its lower GWP (675 vs. 2087, 5 for R-410A) and a lower refrigerant charge, R-32 is able to reduce by 75% its CO₂ equivalent which makes it better for the environment.




reddot award 2018
winner



The hydrosplit concept

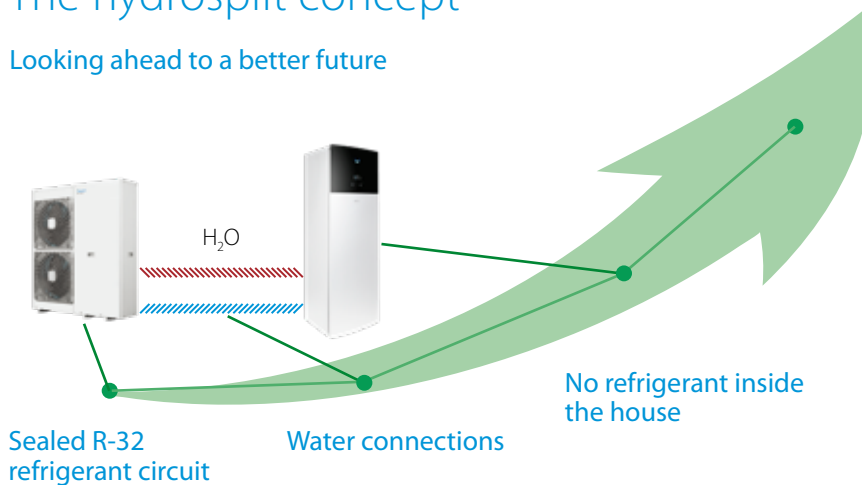Looking ahead to a better future



Reduction of the risk of refrigerant leakage.

Between the indoor and the outdoor units.

With R-32, the future is now

Pioneer in the use of R-32 in air-to-water heat pumps, Daikin places the reduction of its environment impact as an absolute priority.



Gas injection advantage

Higher capacity at low ambient

The Daikin Altherma 3 11-16 kW outdoor unit is equipped with a new gas injection scroll compressor allowing the unit to operate down to -28°C outside temperature.

Moreover, the heating capacity at low ambient temperature (-7/35°C) sees an improvement of 35% compared to its predecessor.

Convenient for sensitive urban areas

Low sound installer setting

In order to fulfill the requirements of the most sound sensitive urban areas, the installer can set up the unit in low sound mode that reduce the sound level by -3 dB(A).

Higher performances

Leaving water temperature

With a leaving water temperature of 60°C at -10°C outside, the Daikin Altherma 3 11-14-16 kW is perfect:

- For new build applications using underfloor heating;
- For renovation applications using radiators.

Top energy performances

Thanks to the use of R-32, the unit reaches the highest energy performances represented by the best energy labels.

Daikin Altherma 3 11-14-16 kW outdoor unit

The outdoor unit EPGA-D is available in size 11-14-16 kW 1 phase and is connectable to:

- EAB(H/X)-D wall mounted indoor units;
- EAV(H/X)-D tank integrated floor standing indoor units;
- EAVZ-D tank integrated and Bi-Zone floor standing indoor units.



(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 H F

with integrated domestic hot water tank

Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 H floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for new build and low energy houses.

Easy to install

Small footprint & practical handles



The floor standing unit is designed to be handled easily thanks to its practical handles and without cutting edges. Its small footprint facilitates the installation in smaller spaces and the access to all the hydraulic components helps the installer to work on the unit without effort.



Advanced user interface

The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.



Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.



Quick to configure

Log in and you'll be able to completely configure the unit via the new user interface in 9 steps. You can even check if the unit is ready for use by running test cycles. You can upload the settings on a USB stick and download it directly into the unit, or via the cloud.

Easy operation

Work super-fast with the new user interface. It's easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The user interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

A complete range to answer all needs

Heating only models - EAVH-D

The heating only Daikin Altherma 3 models provide domestic hot water and space heating in an efficient way.


Reversible models - EAVX-D

Additionally to its core function, Daikin Altherma 3 can provide cooling during hot season.

This cooling function is working via emitters such as an underfloor system or thanks to a fancoil.

Bi-Zone models - EAVZ-D

Daikin also provides a third option to satisfy all the needs: the Daikin Altherma 3 Bi-Zone models. Bi-Zone means that the unit can manage two different water temperature zones at the same time, for instance radiators (45°C) in the bedroom and underfloor heating (35°C) in the living room.



Colour choice



White

Silver-grey

Capacity and sizes



180 or 230 L
1650 or 1850 mm

Daikin Altherma 3 heating only models

Floor standing air to water heat pump for **heating and hot water**; ideal for low energy houses

- › Integrated stainless steel domestic hot water tank of 180 or 230L
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C



011-1W0319 -> 324

up to





A+++

(3)



A



Efficiency data				EAVH + EPGA	16S18D6V(G)/ D9W(G) + 11DV	16S23D6V(G)/ D9W(G) + 11DV	16S18D6V(G)/ D9W(G) + 14DV	16S23D6V(G)/ D9W(G) + 14DV	16S18D6V(G)/ D9W(G) + 16DV	16S23D6V(G)/ D9W(G) + 16DV	
Heating capacity	Nom.			kW	11.1 (1) / 11.3 (2)		14.5 (1) / 14.5 (2)		16.5 (1) / 15.6 (2)		
Power input	Heating	Nom.		kW	2.16 (1) / 2.91 (2)		2.91 (1) / 3.96 (2)		3.45 (1) / 4.21 (2)		
COP					5.15 (1) / 3.88 (2)		4.99 (1) / 3.65 (2)		4.78 (1) / 3.71 (2)		
	Average climate water outlet 55°C	General	SCOP		3.29		3.34		3.41		
			η _{sp} (Seasonal space heating efficiency)	%	129		130		133		
			Seasonal space heating eff. class	A++							
	Average climate water outlet 35°C	General	SCOP		4.38		4.45		4.56		
			η _{sp} (Seasonal space heating efficiency)	%	172		175		179		
				Seasonal space heating eff. class	A++						
	General	Declared load profile			L	XL	L	XL	L	XL	
	Average climate	η _{wh} (water heating efficiency)			104	111	104	111	104	111	
		Water heating energy efficiency class			A						
Indoor Unit				EAVH	16S18D6V(G)/ D9W(G)	16S23D6V(G)/ D9W(G)	16S18D6V(G)/ D9W(G)	16S23D6V(G)/ D9W(G)	16S18D6V(G)/ D9W(G)	16S23D6V(G)/ D9W(G)	
Casing	Colour				White + Black						
	Material				Resin / Sheet metal						
Dimensions	Unit	HeightxWidthxDepth		mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	
Weight	Unit				kg	109	118	109	118	109	118
Tank	Water volume				l	180	230	180	230	180	230
	Maximum water temperature			°C	70						
	Maximum water pressure			bar	10						
	Corrosion protection				Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C	5~30						
		Water side	Min.~Max.	°C	15~60						
	Domestic hot water	Ambient	Min.~Max.	°CDB	5~35						
		Water side	Max.	°C	60						
Sound power level	Nom.				dBA	44					
Sound pressure level	Nom.				dBA	30					
Outdoor Unit				EPGA	11DV		14DV		16DV		
Dimensions	Unit	HeightxWidthxDepth		mm	1440x1160x380						
Weight	Unit				kg	143					
Compressor	Quantity					1					
	Type					Hermetically sealed scroll compressor					
Operation range	Cooling	Min.~Max.		°CDB	10~43						
	Domestic hot water	Min.~Max.		°CDB	-28~35						
Refrigerant	Type					R-32					
	GWP					675.0					
	Charge				kg	3.50					
	Charge				TCO ₂ /Eq	2.36					
	Control					Expansion valve					
Sound power level	Heating	Nom.		dBA	64				66		
	Cooling	Nom.		dBA			68				
Sound pressure level	Heating	Nom.		dBA	48		49		52		
	Cooling	Nom.		dBA			55				
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230						
Current	Recommended fuses			A	32						

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 reversible models



Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- › Integrated stainless steel domestic hot water tank of 180 or 230L
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C



011-1W0319 -> 324



Efficiency data				EAVX + EPGA	16S18D6V(G)/ D9W(G) + 11DV	16S23D6V(G)/ D9W(G) + 11DV	16S18D6V(G)/ D9W(G) + 14DV	16S23D6V(G)/ D9W(G) + 14DV	16S18D6V(G)/ D9W(G) + 16DV	16S23D6V(G)/ D9W(G) + 16DV	
Heating capacity	Nom.			kW	11.1 (1) / 11.3 (2)		14.5 (1) / 14.5 (2)		16.5 (1) / 15.6 (2)		
Power input	Heating Nom.			kW	2.16 (1) / 2.91 (2)		2.91 (1) / 3.96 (2)		3.45 (1) / 4.21 (2)		
Cooling capacity	Nom.			kW	10.5 (1) / 10.7 (2)		11.1 (1) / 11.9 (2)		13.5 (1) / 11.9 (2)		
Power input	Cooling Nom.			kW	2.21 (1) / 3.30 (2)		2.72 (1) / 3.97 (2)		3.42 (1) / 3.97 (2)		
COP					5.15 (1) / 3.88 (2)		4.99 (1) / 3.65 (2)		4.78 (1) / 3.71 (2)		
EER					4.75 (1) / 3.23 (2)		4.09 (1) / 2.99 (2)		3.94 (1) / 2.99 (2)		
 Space heating	Average climate water outlet 55°C	General	SCOP		3.32		3.37		3.43		
			η _s (Seasonal space heating efficiency)	%	130		132		134		
	Average climate water outlet 35°C	General	Seasonal space heating eff. class				A++				
			SCOP		4.44		4.51		4.61		
			η _s (Seasonal space heating efficiency)	%	175		178		182		
			Seasonal space heating eff. class		A++		A+++ (3)				
 Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL	
	Average climate	η _{wh} (water heating efficiency)			%	104	111	104	111	104	111
		Water heating energy efficiency class			A						
Indoor Unit				EAVX	16S18D6V(G)/ D9W(G)	16S23D6V(G)/ D9W(G)	16S18D6V(G)/ D9W(G)	16S23D6V(G)/ D9W(G)	16S18D6V(G)/ D9W(G)	16S23D6V(G)/ D9W(G)	
Casing	Colour				White + Black						
	Material				Resin / Sheet metal						
Dimensions	Unit	HeightxWidthxDepth	mm		1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	
Weight	Unit		kg		109	118	109	118	109	118	
Tank	Water volume			l	180	230	180	230	180	230	
	Maximum water temperature			°C	70						
	Maximum water pressure			bar	10						
	Corrosion protection				Pickling						
Operation range	Heating	Ambient	Min.~Max.	°C	5~30						
		Water side	Min.~Max.	°C	15~60						
	Cooling	Ambient	Min.~Max.	°CDB	5~35						
		Water side	Min.~Max.	°C	5~22						
	Domestic hot water	Ambient	Min.~Max.	°CDB	5~35						
		Water side	Max.	°C	60						
Sound power level	Nom.				dBA	44					
Sound pressure level	Nom.				dBA	30					
Outdoor Unit				EPGA	11DV		14DV		16DV		
Dimensions	Unit	HeightxWidthxDepth	mm		1440x1160x380						
Weight	Unit		kg		143						
Compressor	Quantity				1						
	Type				Hermetically sealed scroll compressor						
Operation range	Cooling	Min.~Max.		°CDB	10~43						
	Domestic hot water	Min.~Max.		°CDB	-28~35						
Refrigerant	Type				R-32						
	GWP				675.0						
	Charge	kg			3.50						
	Charge	TCO ₂ Eq			2.36						
	Control				Expansion valve						
	Sound power level	Heating	Nom.	dBA	64				66		
	Cooling	Nom.	dBA	68							
Sound pressure level	Heating	Nom.	dBA	48		49		52			
	Cooling	Nom.	dBA	55							
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230						
Current	Recommended fuses			A	32						

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3

Bi-Zone models

Floor standing integrated with **two different temperature zones monitoring**

- › Integrated stainless steel domestic hot water tank of 180 or 230L
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C



011-1W0319 -> 324

up to



A+++



(3)



A

60°C















R-32

Efficiency data				EAVZ + EPGA	16S18D6V/D9W + 11DV	16S23D6V/D9W + 11DV	16S18D6V/D9W + 14DV	16S23D6V/D9W + 14DV	16S18D6V/D9W + 16DV	16S23D6V/D9W + 16DV
Heating capacity	Nom.			kW	11.1 (1) / 11.3 (2)		14.5 (1) / 14.5 (2)		16.5 (1) / 15.6 (2)	
Power input	Heating	Nom.		kW	2.16 (1) / 2.91 (2)		2.91 (1) / 3.96 (2)		3.45 (1) / 4.21 (2)	
COP					5.15 (1) / 3.88 (2)		4.99 (1) / 3.65 (2)		4.78 (1) / 3.71 (2)	
 Space heating	Average climate water outlet 55°C	General	SCOP		3.29		3.34		3.41	
			η _s (Seasonal space heating efficiency)	%	129		130		133	
			Seasonal space heating eff. class				A++			
	Average climate water outlet 35°C	General	SCOP		4.38		4.45		4.56	
			η _s (Seasonal space heating efficiency)	%	172		175		179	
			Seasonal space heating eff. class		A++		A+++ (3)			
 Domestic hot water heating	General	Declared load profile			L	XL	L	XL	L	XL
	Average climate	η _{wh} (water heating efficiency)			104	111	104	111	104	111
		Water heating energy efficiency class			A					
Indoor Unit				EAVZ	16S18D6V/D9W	16S23D6V/D9W	16S18D6V/D9W	16S23D6V/D9W	16S18D6V/D9W	16S23D6V/D9W
Casing	Colour				White + Black					
	Material				Resin / Sheet metal					
Dimensions	Unit	HeightxWidthxDepth		mm	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625	1,650x595x625	1,850x595x625
Weight	Unit			kg	120	128	120	128	120	128
Tank	Water volume			l	180	230	180	230	180	230
	Maximum water temperature			°C	70					
	Maximum water pressure			bar	10					
	Corrosion protection				Pickling					
	Operation range	Heating	Ambient	Min.~Max.	°C	5~30				
Water side			Min.~Max.	°C	15~60					
Domestic hot water		Ambient	Min.~Max.	°CDB	5~35					
		Water side	Max.	°C	60					
Sound power level	Nom.			dBA	44					
Sound pressure level	Nom.			dBA	30					
Outdoor Unit				EPGA	11DV		14DV		16DV	
Dimensions	Unit	HeightxWidthxDepth		mm	1440x1160x380					
Weight	Unit			kg	143					
Compressor	Quantity				1					
	Type				Hermetically sealed scroll compressor					
Operation range	Cooling	Min.~Max.		°CDB	10~43					
	Domestic hot water	Min.~Max.		°CDB	-28~35					
Refrigerant	Type				R-32					
	GWP				675.0					
	Charge			kg	3.50					
	Charge			TCO ₂ Eq	2.36					
	Control				Expansion valve					
Sound power level	Heating	Nom.		dBA	64				66	
	Cooling	Nom.		dBA					68	
Sound pressure level	Heating	Nom.		dBA	48		49		52	
	Cooling	Nom.		dBA			55			
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230					
Current	Recommended fuses			A	32					

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

		Type	Material name	Daikin Altherma 3 H F
Controls		Remote user interface	BRC1HHDK/S/W	●
		LAN Adapter + PV Solar connection	BRP069A61	●
		LAN only	BRP069A62	●
		Room thermostat (wired)	EKRTWA	●
		Room thermostat (wireless)	EKRTR1	●
		External sensor	EKRTETS	●
		DCOM gateway	DCOM-LT/IO	
		DCOM gateway	DCOM-LT/MB	
Adapter		Demand PCB	EKRP1AHTA	●
		Digital I/O PCB	EKRP1HBAA	●
Installation		Bi-Zone kit (watts kit)	BZKA7V3	● (excluding EHVZ)
		Third party tank it for tank with sensor pocket	EKHY3PART	
		Third party tank kit for tank with built-in thermostat	EKHY3PART2	
Sensors		Remote indoor sensor	KRCS01-1	●
		Remote outdoor sensor	EKRSCA-1	●
Others		PC USB Cable	EKPCCAB4	●
		Conversion kit	EKHBCONV	
			EKHVCONV2	●
		Universal centralized controller	EKCC8-W	●
		Freeze protection valve	AFVALVE1	●
		Heat pump convector + valve kit	FWXV-A + EKVKHPC	●

Daikin Altherma 3 H W

wall mounted unit

Why choose Daikin wall mounted unit?

The Daikin Altherma 3 H W split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water.

High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required.
- › The unit's sleek design blends in with other household appliances.
- › Combine with a stainless steel or ECH₂O thermal store



Advanced user interface

The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.



Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.



Quick to configure

Log in and you'll be able to completely configure the unit via the new user interface in 9 steps. You can even check if the unit is ready for use by running test cycles. You can upload the settings on an USB stick and download it directly into the unit, or via the cloud.

Easy operation

Work super-fast with the new user interface. It's easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The user interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

Heat pumps

Multiple tank solutions, infinite possibilities

ECH₂O Thermal stores (EKHWP-(P)B)

Connect your Daikin Altherma 3 wall mounted unit with a thermal store and take advantage of the energy of the sun.

Stainless steel tank (EKHWS(U)-D)

Connect your Daikin Altherma 3 wall mounted unit with a stainless steel tank to achieve efficient domestic hot water heating production.

Flexibility in providing domestic hot water

Heating only models - EABH-D

The heating only Daikin Altherma 3 models provide domestic hot water and space heating in an efficient way.



Reversible models - EABX-D

Additionally to its core function, Daikin Altherma 3 can provide cooling during hot season.

This cooling function is working via emitters such as an underfloor system or thanks to a fancoil.



> See more details on thermal stores and tanks on page 18.

Daikin Altherma 3 heating only models

Wall mounted **heating only** air-to-water heat pump ideal for low energy houses


- › Combine with a stainless steel tank or ECH₂O thermal store to provide domestic hot water
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C



(3)



011-1W0319 -> 324

Efficiency data				EABH + EPGA	16D6V/D9W + 11DV		16D6V/D9W + 14DV		16D6V/D9W + 16DV	
Heating capacity	Nom.			kW	11.1 (1) / 11.3 (2)		14.5 (1) / 14.5 (2)		16.5 (1) / 15.6 (2)	
Power input	Heating	Nom.		kW	2.16 (1) / 2.91 (2)		2.91 (1) / 3.96 (2)		3.45 (1) / 4.21 (2)	
COP					5.15 (1) / 3.88 (2)		4.99 (1) / 3.65 (2)		4.78 (1) / 3.71 (2)	
 Space heating	Average climate water outlet 55°C	General	SCOP		3.29		3.34		3.41	
			ηs (Seasonal space heating efficiency)	%	129		130		133	
			Seasonal space heating eff. class	A++						
	Average climate water outlet 35°C	General	SCOP		4.38		4.45		4.56	
			ηs (Seasonal space heating efficiency)	%	172		175		179	
				Seasonal space heating eff. class	A++A+++ (3)					
Indoor Unit				EABH	16D6V	16D9W	16D6V	16D9W	16D6V	16D9W
Casing	Colour				White + Black					
	Material				Resin, sheet metal					
Dimensions	Unit	HeightxWidthxDepth		mm	840x440x390					
Weight	Unit			kg	38					
Operation range	Heating	Water side	Min.~Max.	°C	15~60					
	Domestic hot water	Water side	Min.~Max.	°C	25~75					
Sound power level	Nom.			dBA	44					
Sound pressure level	Nom.			dBA	30					
Outdoor Unit				EPGA	11DV		14DV		16DV	
Dimensions	Unit	HeightxWidthxDepth		mm	1440x1160x380					
Weight	Unit			kg	143					
Compressor	Quantity				1					
	Type				Hermetically sealed scroll compressor					
Operation range	Cooling		Min.~Max.	°CDB	10~43					
	Domestic hot water		Min.~Max.	°CDB	-28~35					
Refrigerant	Type				R-32					
	GWP				675.0					
	Charge			kg	3.50					
	Charge			TCO2Eq	2.36					
	Control				Expansion valve					
Sound power level	Heating	Nom.	dBA		64				66	
	Cooling	Nom.	dBA						68	
Sound pressure level	Heating	Nom.	dBA		48		49		52	
	Cooling	Nom.	dBA				55			
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1N~/50/230					
Current	Recommended fuses			A	32					


(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 reversible models

Wall mounted **reversible** air-to-water heat pump ideal for low energy houses


- › Combine with a stainless steel tank or ECH₂O thermal store to provide domestic hot water
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C



(3)

















011-1W0319 -> 324

Efficiency data				EABX + EPGA	16D6V/D9W + 11DV		16D6V/D9W + 14DV		16D6V/D9W + 16DV		
Heating capacity	Nom.			kW	11.1 (1) / 11.3 (2)		14.5 (1) / 14.5 (2)		16.5 (1) / 15.6 (2)		
Power input	Heating	Nom.		kW	2.16 (1) / 2.91 (2)		2.91 (1) / 3.96 (2)		3.45 (1) / 4.21 (2)		
Cooling capacity	Nom.			kW	10.5 (1) / 10.7 (2)		11.1 (1) / 11.9 (2)		13.5 (1) / 11.9 (2)		
Power input	Cooling	Nom.		kW	2.21 (1) / 3.30 (2)		2.72 (1) / 3.97 (2)		3.42 (1) / 3.97 (2)		
COP					5.15 (1) / 3.88 (2)		4.99 (1) / 3.65 (2)		4.78 (1) / 3.71 (2)		
EER					4.75 (1) / 3.23 (2)		4.09 (1) / 2.99 (2)		3.94 (1) / 2.99 (2)		
 Space heating	Average climate water outlet 55°C	General	SCOP		3.32		3.37		3.43		
			η _s (Seasonal space heating efficiency)	%	130		132		134		
			Seasonal space heating eff. class								
	Average climate water outlet 35°C	General	SCOP		4.44		4.51		4.61		
			η _s (Seasonal space heating efficiency)	%	175		178		182		
					A++				A+++ (3)		
Indoor Unit					EABX	16D6V	16D9W	16D6V	16D9W	16D6V	16D9W
Casing	Colour					White + Black					
	Material					Resin, sheet metal					
Dimensions	Unit	HeightxWidthxDepth			mm	840x440x390					
Weight	Unit					kg					
Operation range	Heating	Water side	Min.~Max.	°C	15~60						
	Domestic hot water	Water side	Min.~Max.	°C	25~75						
Sound power level	Nom.					dBA					
Sound pressure level	Nom.					dBA					
Outdoor Unit					EPGA	11DV		14DV		16DV	
Dimensions	Unit	HeightxWidthxDepth			mm	1440x1160x380					
Weight	Unit					kg					
Compressor	Quantity					143					
	Type					1					
Operation range	Cooling		Min.~Max.	°CDB	Hermetically sealed scroll compressor						
	Domestic hot water		Min.~Max.	°CDB	10~43						
Refrigerant	Type					-28~35					
	GWP					R-32					
	Charge					675.0					
	Charge					3.50					
	Control					2.36					
Sound power level	Heating	Nom.		dBA	64				66		
	Cooling	Nom.		dBA			68				
Sound pressure level	Heating	Nom.		dBA	48		49	52			
	Cooling	Nom.		dBA			55				
Power supply	Name/Phase/Frequency/Voltage				Hz/V	V3/1N~/50/230					
Current	Recommended fuses				A	32					

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

		Type	Material name	Daikin Altherma 3 H W
Controls		Remote user interface	BRC1HHDK/S/W	●
		LAN Adapter + PV Solar connection	BRP069A61	●
		LAN only	BRP069A62	●
		Room thermostat (wired)	EKRTWA	●
		Room thermostat (wireless)	EKRTR1	●
		External sensor	EKRTETS	●
		DCOM gateway	DCOM-LT/IO	
		DCOM gateway	DCOM-LT/MB	
Adapter		Demand PCB	EKRP1AHTA	●
		Digital I/O PCB	EKRP1HBAA	●
Installation		Bi-Zone kit (watts kit)	BZKA7V3	●
		Third party tank it for tank with sensor pocket	EKHY3PART	●
		Third party tank kit for tank with built-in thermostat	EKHY3PART2	●
Sensors		Remote indoor sensor	KRCS01-1	●
		Remote outdoor sensor	EKRSCA-1	●
Others		PC USB Cable	EKPCCAB4	●
		Conversion kit	EKHBCONV EKHVCONV2	●
		Universal centralized controller	EKCC8-W	●
		Freeze protection valve	AFVALVE1	●
		Heat pump convector + valve kit	FWXV-A + EKVKHPC	●



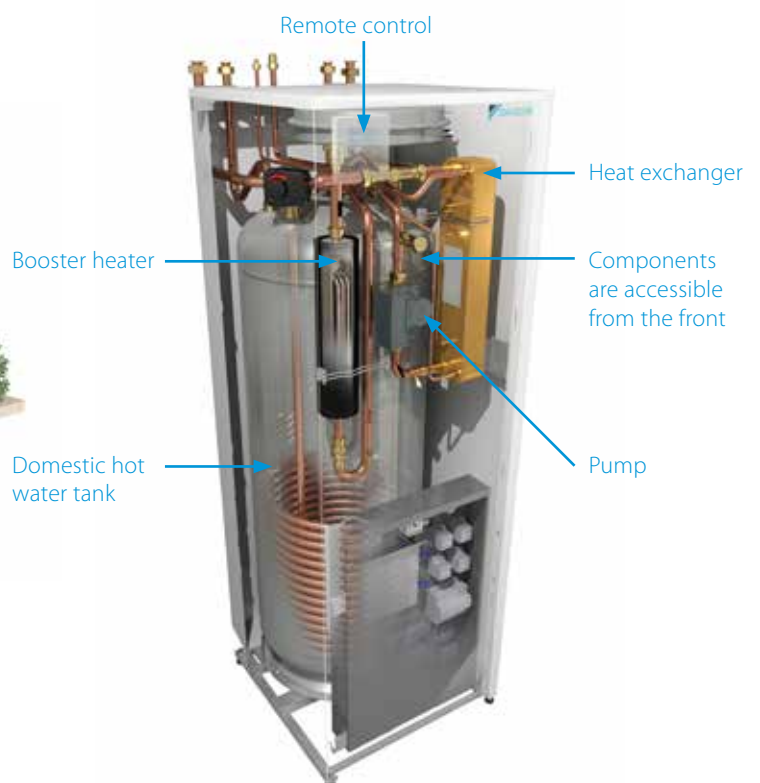
Daikin Altherma R F low temperature split floor standing unit with integrated domestic hot water tank



The Daikin Altherma floor standing unit heating delivers domestic hot water and cooling for new builds and low-energy houses.

All-in-one system to save installation space and time

- › A combined stainless steel domestic hot water tank and heat pump ensures a faster installation compared to traditional systems
- › Inclusion of all hydraulic components means no third-party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint with space reduced by more than 30%
- › Integrated Bi-Zone kit allows temperature monitoring for two zones: connect underfloor heating to radiators to optimise efficiency.






All-in-one design reduces the installation footprint and height

Compared to the traditional split version for a wall mounted indoor unit and separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

Smaller footprint: with a width of only 600 mm and a depth of 728 mm, the integrated indoor unit has a similar footprint when compared to other household appliances. For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit. This results in an installation footprint of only 0.45 m².

Low installation height: both the 180l and 260l version come with a height of 173 cm. The required installation height is less than 2 m.

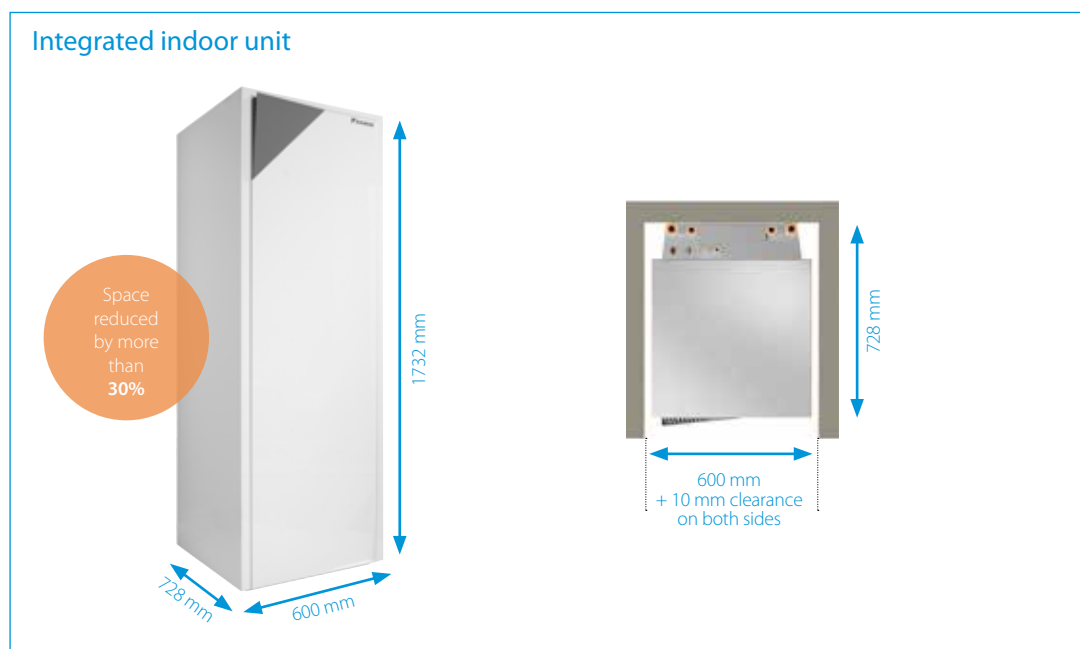The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easily blending in with other household appliances.



Daikin Altherma low temperature split integrated floor standing unit

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



011-1W0068 → 78





A++



A

55°C

R-410A

Efficiency data				EHVH + ERLQ-C		04S18CB3V + 004CV3		08S26CB9W / 08S18CB3V + 006CV3		08S18CB3V / 08S26CB9W + 008CV3		11S18CB3V / 11S26CB9W + 011CV3		16S18CB3V / 16S26CB9W + 014CV3		16S18CB3V / 16S26CB9W + 016CV3		11S18CB3V / 11S26CB9W + 011CW1		16S18CB3V / 16S26CB9W + 014CW1		16S18CB3V / 16S26CB9W + 016CW1				
Heating capacity	Nom.			kW		4.40 (1) / 4.03 (2)		6.00 (1) / 5.67 (2)		7.40 (1) / 6.89 (2)		11.2 (1) / 11.0 (2)		14.5 (1) / 13.6 (2)		16.0 (1) / 15.2 (2)		11.2 (1) / 11.0 (2)		14.5 (1) / 13.6 (2)		16.0 (1) / 15.2 (2)				
Power input	Heating	Nom.		kW		0.870 (1) / 1.13 (2)		1.27 (1) / 1.59 (2)		1.66 (1) / 2.01 (2)		2.43 (1) / 3.10 (2)		3.37 (1) / 4.10 (2)		3.76 (1) / 4.66 (2)		2.43 (1) / 3.10 (2)		3.37 (1) / 4.10 (2)		3.76 (1) / 4.66 (2)				
COP						5.04 (1) / 3.58 (2)		4.74 (1) / 3.56 (2)		4.45 (1) / 3.42 (2)		4.60 (1) / 2.75 (3) / 3.55 (2) / 2.10 (4)		4.30 (1) / 2.65 (3) / 3.32 (2) / 2.08, (4)		4.25 (1) / 2.64 (3) / 3.26 (2) / 2.09 (4)		4.60 (1) / 2.75 (3) / 3.55 (2) / 2.10 (4)		4.30 (1) / 2.65 (3) / 3.32 (2) / 2.08 (4)		4.25 (1) / 2.64 (3) / 3.26 (2) / 2.09 (4)				
 Space heating	Average climate water outlet 55°C	General	SCOP ηs (Seasonal space heating efficiency)	%		3.20		3.22		3.20		3.09		3.16		3.06		3.09		3.16		3.06				
			Seasonal space heating eff. class			A++			A+																	
	Average climate water outlet 35°C	General	SCOP ηs (Seasonal space heating efficiency)	%		4.52		4.29		4.34		3.98		3.90		3.80		3.98		3.90		3.80				
			Seasonal space heating eff. class			178		169		171		156		153		149		156		153		149				
 Domestic hot water heating	General	Declared load profile				L	XL	L	XL	L	XL	L	XL	L	XL	L	XL	L	XL	L	XL	L	XL			
	Average climate	ηwh (water heating efficiency)	%		95.0	90.0	86.4	90.0	87.4	97.7	87.4	97.7	87.4	97.7	87.4	97.7	87.4	97.7	87.4	97.7	87.4	97.7	87.4	97.7		
		Water heating energy efficiency class			A																					

Indoor Unit			EHVH	04S18CB3V	08S26CB9W / 08S18CB3V		08S18CB3V / 08S26CB9W		11S18CB3V / 11S26CB9W		16S18CB3V / 16S26CB9W		16S18CB3V / 16S26CB9W		11S18CB3V / 11S26CB9W		16S18CB3V / 16S26CB9W		16S18CB3V / 16S26CB9W		
Casing	Colour			White																	
	Material			Precoated sheet metal																	
Dimensions	Unit	HeightxWidthxDepth	mm	1,732x600x728																	
Weight	Unit		kg	116	127	117	127	117	126	118	128	118	128	117	126	118	128	118	128		
Tank	Water volume		l	180	260	180	260	180	260	180	260	180	260	180	260	180	260	180	260		
	Maximum water temperature		°C	65																	
	Maximum water pressure		bar	10																	
	Corrosion protection			Anode																	
Operation range	Heating	Water side Min.~Max.	°C	15 ~55.0																	
	Domestic hot water	Water side Min.~Max.	°C	25~60						25~60 / 60											
Sound power level	Nom.		dBA	42.0						44.0						42.0					
Sound pressure level	Nom.		dBA	28.0						30.0						28.0					
				30.0						28.0						30.0					

Outdoor Unit				ERLQ-C	004CV3	006CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1
Dimensions	Unit	HeightxWidthxDepth	mm	735x832x307				1,345x900x320					
Weight	Unit		kg	54	56			113			114		
Compressor	Quantity			Hermetically sealed swing compressor				Hermetically sealed scroll compressor					
	Type												
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0				10.0~46.0					
	Domestic hot water	Min.~Max.	°CDB	-25 ~35				-20 ~35					
Refrigerant	Type			R-410A									
	GWP			2,087.5									
	Charge		kg	1.5	1.6			3.4					
	Charge		TCO ₂ Eq	3.1	3.3			7.1					
	GWP			2,087.5									
Sound power level	Heating	Nom.	dBA	61		62		64		66	64		66
	Cooling	Nom.	dBA	63				64		66	64		66
Sound pressure level	Heating	Nom.	dBA	48		49		51		52	51		52
	Cooling	Nom.	dBA	48	49		50		52	54	50		52
Power supply	Name/Phase/Frequency/Voltage			Hz/V			V3/1~/50/230			W1/3N~/50/400			
Current	Recommended fuses			A		16		20		40		20	

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)



(3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit

Floor standing air to water heat pump **for heating
and hot water**, ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Outdoor unit extracts heat from the outdoor air, even at -20°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHVH + ERHQ-B		11S26CB9W / 11S18CB3V + 011BV3		16S26CB9W / 16S18CB3V + 014BV3		16S26CB9W / 16S18CB3V + 016BV3		11S26CB9W / 11S18CB3V + 011BW1		16S26CB9W / 16S18CB3V + 014BW17		16S18CB3V / 16S26CB9W + 016BW1					
Heating capacity	Nom.		kW			11.2(1)/ 10.3(2)		14.0(1)/ 13.1(2)		16.0(1)/ 15.2(2)		11.3(1)/ 11.0(2)		14.5(1)/ 13.6(2)		16.1(1)/ 15.1(2)					
Power input	Heating	Nom.	kW			2.55(1)/ 3.17(2)		3.26(1)/ 4.04(2)		3.92(1)/ 4.75(2)		2.63(1)/ 3.24(2)		3.42(1)/ 4.21(2)		3.82(1)/ 4.69(2)					
COP						4.39(1)/ 3.25(2)		4.29(1)/ 3.24(2)		4.08(1)/ 3.20(2)		4.30(1)/ 3.39(2)		4.24(1)/ 3.22(2)		4.20(1)/ 3.22(2)					
	Average climate water outlet 55°C	General	SCOP			2.86		2.82		2.92		2.90		2.86		2.96					
			ηs (Seasonal space heating efficiency)	%	112		110		114		113		111		115						
	Average climate water outlet 35°C	General	Seasonal space heating eff. class			A+															
			SCOP			2.99		3.23		3.29		3.08		3.34							
			ηs (Seasonal space heating efficiency)	%		117		126		129		120		131		130					
			Seasonal space heating eff. class			A		A+				A		A+							
	General	Declared load profile				XL	L	XL	L	XL	L	XL	L	XL	L	L	XL				
	Average climate	ηwh (water heating efficiency)			%	95.3	90.5	95.3	90.5	95.3	90.5	87.3	84.3	87.3	84.3	84.3	87.3				
		Water heating energy efficiency class				A												A			
Indoor Unit				EHVH		11S26CB9W / 11S18CB3V		16S26CB9W / 16S18CB3V		16S26CB9W / 16S18CB3V		11S26CB9W / 11S18CB3V		16S26CB9W / 16S18CB3V		16S18CB3V / 16S26CB9W					
Casing	Colour					White															
	Material					Precoated sheet metal															
Dimensions	Unit	HeightxWidthxDepth	mm			1,732x600x728															
Weight	Unit		kg			126	117	128	118	128	118	126	117	128	118	118	128				
Tank	Water volume		l			260	180	260	180	260	180	260	180	260	180	180	260				
	Maximum water temperature		°C			65															
	Maximum water pressure		bar			10															
	Corrosion protection					Anode															
Operation range	Heating	Water side Min.~Max.	°C			15 ~55.0															
	Domestic hot water	Water side Min.~Max.	°C			25~60 / 60															
Sound power level	Nom.		dBA			42.0		44.0				42.0		44.0							
Sound pressure level	Nom.		dBA			28.0		30.0				28.0		30.0							
Outdoor Unit				ERHQ-B		011BV3		014BV3		016BV3		011BW1		014BW17		016BW1					
Dimensions	Unit	HeightxWidthxDepth	mm			1,170x900x320										1,345x900x320					
Weight	Unit		kg			102										108					
Compressor	Quantity					1															
	Type					Hermetically sealed scroll compressor															
Operation range	Cooling	Min.~Max.	°CDB			10.0~46.0															
	Domestic hot water	Min.~Max.	°CDB			-20 ~35															
Refrigerant	Type					R-410A															
	GWP					2,087.5															
	Charge		kg			2.7								3.0							
	Charge		TCO ₂ Eq			5.6								6.3							
Sound power level	Heating	Nom.	dBA			64				66		64						66			
				Cooling	Nom.	dBA	64		66	69	64		66		69						
Sound pressure level	Heating	Nom.	dBA			49		51		53		51		52		52					
	Cooling	Nom.	dBA			50		52		54		50		52		54					
Power supply	Name/Phase/Frequency/Voltage			Hz/V		V3/1~/50/230						W1/3N~/50/400									
Current	Recommended fuses			A		32						20									

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

Daikin Altherma

low temperature split

integrated floor standing unit

Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



011-1W0068 → 78





up to

A++



A

Efficiency data				EHVX + ERLQ-C		04S18CB3V + 004CV3	08S18CB3V / 08S26CB9W + 006CV3	08S18CB3V / 08S26CB9W + 008CV3	11S18CB3V / 11S26CB9W + 011CV3	16S18CB3V / 16S26CB9W + 014CV3	16S18CB3V / 16S26CB9W + 016CV3	11S18CB3V / 11S26CB9W + 011CW1	16S18CB3V / 16S26CB9W + 014CW1	16S18CB3V / 16S26CB9W + 016CW1
Heating capacity	Nom.			kW		4.40(1) / 4.03(2)	6.00(1) / 5.67(2)	7.40(1) / 6.89(2)	11.2(1) / 11.0(2)	14.5(1) / 13.6(2)	16.0(1) / 15.2(2)	11.2(1) / 11.0(2)	14.5(1) / 13.6(2)	16.0(1) / 15.2(2)
Cooling capacity	Nom.			kW		4.08(1) / 4.17(2)	5.88(1) / 4.84(2)	6.20(1) / 5.36(2)	12.1(1) / 11.7(2)	12.7(1) / 12.6(2)	13.8(1) / 13.1(2)	12.1(1) / 11.7(2)	12.7(1) / 12.6(2)	13.8(1) / 13.1(2)
Power input	Heating	Nom.		kW		0.870(1) / 1.13(2)	1.27(1) / 1.59(2)	1.66(1) / 2.01(2)	2.43(1) / 3.10(2)	3.37(1) / 4.10(2)	3.76(1) / 4.66(2)	2.43(1) / 3.10(2)	3.37(1) / 4.10(2)	3.76(1) / 4.66(2)
	Cooling	Nom.		kW		0.900(1) / 1.80(2)	1.51(1) / 2.07(2)	1.64(1) / 2.34(2)	3.05(1) / 4.31(2)	3.21(1) / 5.08(2)	3.74(1) / 5.73(2)	3.05(1) / 4.31(2)	3.21(1) / 5.08(2)	3.74(1) / 5.73(2)
COP						5.04(1) / 3.58(2)	4.74(1) / 3.56(2)	4.45(1) / 3.42(2)	4.60(1) / 3.55(2) / 2.10(4)	4.30(1) / 3.32(2) / 2.08(4)	4.25(1) / 3.26(2) / 2.09(4)	4.60(1) / 3.55(2) / 2.10(4)	4.30(1) / 3.32(2) / 2.08(4)	4.25(1) / 3.26(2) / 2.09(4)
EER						4.55(1) / 2.32(2)	3.89(1) / 2.34(2)	3.79(1) / 2.29(2)	3.98(1) / 2.72(2)	3.96(1) / 2.47(2)	3.69(1) / 2.29(2)	3.98(1) / 2.72(2)	3.96(1) / 2.47(2)	3.69(1) / 2.29(2)
 Space heating	Average climate water outlet 55°C	General	SCOP		3.20	3.22	3.20	3.09	3.16	3.06	3.09	3.16	3.06	
			ηs (Seasonal space heating efficiency)	%	125	126	125	120	123	119	120	123	119	
	Average climate water outlet 35°C	General	SCOP		4.52	4.29	4.34	3.98	3.90	3.80	3.98	3.90	3.80	
			ηs (Seasonal space heating efficiency)	%	178	169	171	156	153	149	156	153	149	
				Seasonal space heating eff. class	A++					A+				
 Domestic hot water heating	General climate	Declared load profile			L	XL	L	XL	L	XL	L	XL	L	XL
			Average climate	ηwh (water heating efficiency)	%	95.0	86.4	90.0	86.4	90.0	87.4	97.7	87.4	97.7
	Water heating energy efficiency class				A					A				
						A					A			

Indoor Unit				EHVX	04S18CB3V		08S18CB3V		08S26CB9W		11S18CB3V		11S26CB9W		16S18CB3V		16S26CB9W						
Casing	Colour	Material			White																		
	Precoated sheet metal																						
Dimensions	Unit	HeightxWidthxDepth			mm	1,732x600x728																	
Weight	Unit				kg	117		119		129		119		128		120		130					
Tank	Water volume				l	180				260		180		260		180		260					
	Maximum water temperature				°C	65																	
Operation range	Maximum water pressure				bar	10																	
	Corrosion protection					Anode																	
	Heating	Water side	Min.~Max.		°C	15 ~55.0																	
	Cooling	Water side	Min.~Max.		°C	5.00~22.0																	
	Domestic hot water	Water side	Min.~Max.		°C	25~60				25~60 / 60													
Sound power level	Nom.				dBA					42.0								44.0					
Sound pressure level	Nom.				dBA					28.0								30.0					
Outdoor Unit					ERLQ-C	004CV3		006CV3		008CV3		011CV3		014CV3		016CV3		011CW1		014CW1		016CW1	
Dimensions	Unit	HeightxWidthxDepth			mm	735x832x307						1,345x900x320											
Weight	Unit				kg	54		56		113						114							
Compressor	Quantity					1																	
	Type					Hermetically sealed swing compressor						Hermetically sealed scroll compressor											
Operation range	Cooling	Min.~Max.		°CDB	10.0~43.0						10.0~46.0												
	Domestic hot water	Min.~Max.		°CDB	-25 ~35						-20 ~35												
Refrigerant	Type				R-410A																		
	GWP				2,087.5																		
	Charge				kg	1.5		1.6		3.4													
	Charge				TCO ₂ Eq	3.1		3.3		7.1													
	GWP				2,087.5																		
Sound power level	Heating	Nom.		dBA	61		62		64		66		69		64		66		66				
	Cooling	Nom.		dBA	63				64		66		69		64		66		69				
Sound pressure level	Heating	Nom.		dBA	48		49		50		51		52		50		51		52				
	Cooling	Nom.		dBA	48		49		50		52		54		50		52		54				
Power supply	Name/Phase/Frequency/Voltage				Hz/V	V3/1~/50/230																	
Current	Recommended fuses				A	16		20		40		W1/3N~/50/400											
												20											

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma



low temperature split

integrated floor standing unit

Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Outdoor unit extracts heat from the outdoor air, even at -20°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHVX + ERHQ-B		11S18CB3V + 011BV3	11S26CB9W + 011BV3	16S26CB9W + 014BV3	16S18CB3V + 014BV3	16S26CB9W + 016BV3	16S18CB3V + 016BV3	11S18CB3V + 011BW1	11S26CB9W + 011BW1	16S26CB9W + 014BW17	16S18CB3V + 014BW17	16S18CB3V + 016BW1	16S26CB9W + 016BW1					
Heating capacity	Nom.		kW			11.2 (1) / 10.3(2)	14.0 (1) / 13.1(2)	16.0 (1) / 15.2(2)	17.8 (1) / 17.8(2)	15.1 (1) / 14.7(2)	14.5 (1) / 13.6(2)	16.1 (1) / 15.1(2)	17.8 (1) / 17.8(2)	15.1 (1) / 14.7(2)	14.5 (1) / 13.6(2)	16.1 (1) / 15.1(2)	17.8 (1) / 17.8(2)					
Cooling capacity	Nom.		kW			13.9 (1) / 10.0(2)	17.3 (1) / 12.5(2)	17.8 (1) / 13.1(2)	15.1 (1) / 11.7(2)	16.1 (1) / 12.6(2)	16.8 (1) / 13.1(2)	13.9 (1) / 10.0(2)	17.3 (1) / 12.5(2)	17.8 (1) / 13.1(2)	15.1 (1) / 11.7(2)	16.1 (1) / 12.6(2)	16.8 (1) / 13.1(2)					
Power input	Heating	Nom.	kW			2.55 (1) / 3.17(2)	3.26 (1) / 4.04(2)	3.92 (1) / 4.75(2)	2.63 (1) / 3.24(2)	3.42 (1) / 4.21(2)	3.82 (1) / 4.69(2)	2.55 (1) / 3.17(2)	3.26 (1) / 4.04(2)	3.92 (1) / 4.75(2)	2.63 (1) / 3.24(2)	3.42 (1) / 4.21(2)	3.82 (1) / 4.69(2)					
	Cooling	Nom.	kW			3.86 (1) / 3.69(2)	5.86 (1) / 5.69(2)	6.87 (1) / 5.95(2)	4.53 (1) / 4.31(2)	5.43 (1) / 5.08(2)	6.16 (1) / 5.73(2)	3.86 (1) / 3.69(2)	5.86 (1) / 5.69(2)	6.87 (1) / 5.95(2)	4.53 (1) / 4.31(2)	5.43 (1) / 5.08(2)	6.16 (1) / 5.73(2)					
COP						4.39 (1) / 3.25(2)	4.29 (1) / 3.24(2)	4.08 (1) / 3.20(2)	4.30 (1) / 3.39(2)	4.24 (1) / 3.22(2)	4.20 (1) / 3.22(2)	4.39 (1) / 3.25(2)	4.29 (1) / 3.24(2)	4.08 (1) / 3.20(2)	4.30 (1) / 3.39(2)	4.24 (1) / 3.22(2)	4.20 (1) / 3.22(2)					
EER						3.60 (1) / 2.71(2)	2.95 (1) / 2.32(2)	2.59 (1) / 2.20(2)	3.32 (1) / 2.72(2)	2.96 (1) / 2.47(2)	2.72 (1) / 2.29(2)	3.60 (1) / 2.71(2)	2.95 (1) / 2.32(2)	2.59 (1) / 2.20(2)	3.32 (1) / 2.72(2)	2.96 (1) / 2.47(2)	2.72 (1) / 2.29(2)					
 Space heating	Average climate water outlet 55°C	General	SCOP	ηs (Seasonal space heating efficiency)	%	2.86	2.82	2.92	2.90	2.86 / 2.80	2.96	2.86	2.82	2.92	2.90	2.86 / 2.80	2.96					
				Seasonal space heating eff. class		112	110	114	113	111 / 109	115	112	110	114	113	111 / 109	115					
	Average climate water outlet 35°C	General	SCOP	ηs (Seasonal space heating efficiency)	%	2.99	3.23	3.29	3.08	3.34	3.33	2.99	3.23	3.29	3.08	3.34	3.33					
				Seasonal space heating eff. class		117	126	129	120	131	130	117	126	129	120	131	130					
 Domestic hot water heating	General	Declared load profile				L	XL	L	XL	L	XL	L	XL	L	XL	L	XL					
	Average	ηwh (water heating efficiency)		%		90.5	95.3	90.5	95.3	90.5	84.3	87.3	84.3	87.3	84.3	87.3	84.3					
	climate	Water heating energy efficiency class				A																
Indoor Unit				EHVX		11S18CB3V	11S26CB9W	16S26CB9W	16S18CB3V	16S26CB9W	16S18CB3V	11S18CB3V	11S26CB9W	16S26CB9W	16S18CB3V	16S18CB3V	16S26CB9W					
Casing	Colour						White															
	Material						Precoated sheet metal															
Dimensions	Unit	HeightxWidthxDepth	mm	1,732x600x728																		
Weight	Unit		kg	119	128	130	120	130	120	119	128	130	120	130	120	130	130					
Tank	Water volume		l	180	260	180	260	180	260	180	260	180	260	180	260	180	260					
	Maximum water temperature		°C	65																		
	Maximum water pressure		bar	10																		
	Corrosion protection			Anode																		
Operation range	Heating	Water side Min.~Max.	°C	15~55.0																		
	Cooling	Water side Min.~Max.	°C	5.00~22.0																		
	Domestic hot water	Water side Min.~Max.	°C	25~60 / 60																		
Sound power level	Nom.		dBA	42.0			44.0			42.0		44.0			42.0		44.0					
Sound pressure level	Nom.		dBA	28.0			30.0			28.0		30.0			28.0		30.0					
Outdoor Unit				ERHQ-B		011BV3	011BV3	014BV3	014BV3	016BV3	016BV3	011BW1	011BW1	014BW1	014BW17	016BW1	016BW1					
Dimensions	Unit	HeightxWidthxDepth	mm	1,170x900x320										1,345x900x320								
Weight	Unit		kg	102										108								
Compressor	Quantity			1																		
	Type			Hermetically sealed scroll compressor																		
Operation range	Cooling	Min.~Max.	°CDB	10.0~46.0																		
	Domestic hot water	Min.~Max.	°CDB	-20 ~35																		
Refrigerant	Type			R-410A																		
	GWP			2,087.5																		
	Charge		kg	2.7								3.0										
	Charge		TCO ₂ Eq	5.6								6.3										
Sound power level	Heating	Nom.	dBA	64								66										
	Cooling	Nom.	dBA	64								66										
	Heating	Nom.	dBA	49								51										
	Cooling	Nom.	dBA	50								52										
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230								W1/3N~/50/400									
Current	Recommended fuses			A	32								20									

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

Daikin Altherma

low temperature split



integrated Bi-Zone



Optimum efficiency offering full flexibility in heat emitters

- › Two different temperature zones can be automatically regulated by the same indoor unit
- › Offers flexibility to the end user to combine different heat emitters e.g. under floor heating and radiators while optimising the efficiency
- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Energy efficient heating only system based on air to water heat pump technology
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHVZ + ERLQ-C		04S18CB3V + 004CV3	08S18CB3V + 006CV3	08S18CB3V + 008CV3	16S18CB3V + 011CV3	16S18CB3V + 014CV3	16S18CB3V + 016CV3	16S18CB3V + 011CW1	16S18CB3V + 014CW1	16S18CB3V + 016CW1	
Heating capacity	Nom.			kW	4.40(1) / 4.03(2)	6.00(1) / 5.67(2)	7.40(1) / 6.89(2)	11.2(1) / 11.0(2)	14.4(1) / 13.5(2)	15.9(1) / 15.1(2)	11.2(1) / 11.0(2)	14.4(1) / 13.5(2)	15.9(1) / 15.1(2)		
Power input	Heating	Nom.		kW	0.870(1) / 1.13(2)	1.27(1) / 1.59(2)	1.66(1) / 2.01(2)	2.43(1) / 3.10(2)	3.39(1) / 4.12(2)	3.77(1) / 4.67(2)	2.43(1) / 3.10(2)	3.39(1) / 4.12(2)	3.77(1) / 4.67(2)		
COP					5.04(1) / 3.58(2)	4.74(1) / 3.56(2)	4.45(1) / 3.42(2)	4.60(1) / 2.75(3) / 3.55(2) / 2.10(4)	4.24(1) / 2.61(3) / 3.28(2) / 2.05(4)	4.22(1) / 2.61(3) / 3.23(2) / 2.07(4)	4.60(1) / 2.75(3) / 3.55(2) / 2.10(4)	4.24(1) / 2.61(3) / 3.28(2) / 2.05(7)	4.22(1) / 2.61(3) / 3.23(2) / 2.07(4)		
	Average climate water outlet 55°C	General	SCOP	%	3.20	3.22	3.23	3.09	3.16	3.06	3.09	3.16	3.06		
			ηs (Seasonal space heating efficiency)		125			120			123				
	Average climate water outlet 35°C	General	SCOP	%	4.52	4.29	4.34	A+							
			ηs (Seasonal space heating efficiency)		178	169	171	-							
Pump Additional Zone	Nominal ESP unit (*RLQ°C*)	Heating		kPa	52.3 / 55.4	40.6 / 43.3	28.3 / 32.7	26.2 (1) / 28.3 (2)	25.0		26.2 (1) / 28.3 (2)	25.0			
Pump Main Zone	Nominal ESP unit (*RLQ°C*)	Heating		kPa	48.6 / 51.9	39.5 / 42.3	26.4 / 31.2	18.2 (1) / 20.7 (2)	25.0		18.2 (1) / 20.7 (2)	25.0			
	General	Declared load profile			L										
	Average climate	ηwh (water heating efficiency)	%	95.0	86.4			87.4							
		Water heating energy efficiency class			A										
Indoor Unit				EHVZ	04S18CB3V	08S18CB3V	08S18CB3V	16S18CB3V	16S18CB3V	16S18CB3V	16S18CB3V	16S18CB3V	16S18CB3V	16S18CB3V	
Casing	Colour				White										
	Material				Precoated sheet metal										
Dimensions	Unit	HeightxWidthxDepth			1,732x600x728										
Weight	Unit	kg			121	122			121						
Tank	Water volume	l			180										
	Maximum water temperature	°C			65										
	Maximum water pressure	bar			10										
	Corrosion protection				Anode										
Operation range	Heating	Water side	Min.~Max.	°C	15 ~55			15 ~55							
	Domestic hot water	Water side	Min.~Max.	°C	25~60			25~60 / 60							
Sound power level	Nom.	dBA			42			44							
Sound pressure level	Nom.	dBA			28			30							
Outdoor Unit				ERLQ-C	004CV3	006CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1		
Dimensions	Unit	HeightxWidthxDepth			735x832x307										
Weight	Unit	kg			54	56			113						
Compressor	Quantity				1										
	Type				Hermetically sealed swing compressor				Hermetically sealed scroll compressor						
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0				10.0~46.0							
	Domestic hot water	Min.~Max.	°CDB	-25 ~35				-20 ~35							
Refrigerant	Type				R-410A										
	GWP				2,087.5										
	Charge	kg			1.5	1.6			3.4						
	Charge	TCO2Eq			3.1	3.3			71						
Sound power level	Heating	Nom.	dBA	61		62		64		66		64		66	
	Cooling	Nom.	dBA	63				64		66		64		66	
Sound pressure level	Heating	Nom.	dBA	48		49		51		52		51		52	
	Cooling	Nom.	dBA	48	49	50			52	54	50	52	54		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230										
Current	Recommended fuses			A	16		20		40		W1/3N~/50/400				
											20				

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated Bi-Zone

Optimum efficiency offering full flexibility in heat emitters

- › Two different temperature zones can be automatically regulated by the same indoor unit
- › Offers flexibility to the end user to combine different heat emitters e.g. under floor heating and radiators while optimising the efficiency
- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Outdoor unit extracts heat from the outdoor air, even at -20°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)





A⁺



A

55°C

R-410A

Efficiency data				EHVZ + ERHQ-B	16S18CB3V + 011BV3	16S18CB3V + 014BV3	16S18CB3V + 016BV3	16S18CB3V + 011BW1	16S18CB3V + 014BW17	16S18CB3V + 016BW1
Heating capacity	Nom.			kW	11.2(1) / 10.3(2)	14.0(1) / 13.1(2)	16.0(1) / 15.2(2)	11.3(1) / 11.0(2)	14.5(1) / 13.6(2)	16.1(1) / 15.1(2)
Power input	Heating	Nom.		kW	2.55(1) / 3.17(2)	3.26(1) / 4.04(2)	3.92(1) / 4.75(2)	2.63(1) / 3.24(2)	3.42(1) / 4.21(2)	3.82(1) / 4.69(2)
COP					4.39(1) / 3.25(2)	4.29(1) / 3.24(2)	4.08(1) / 3.20(2)	4.30(1) / 3.39(2)	4.24(1) / 3.22(2)	4.20(1) / 3.22(2)
 Space heating	Average climate	General	SCOP		2.86	2.82	2.92	2.90	2.86	2.96
	water outlet 55°C		ηs (Seasonal space heating efficiency)	%	112	110	114	113	111	115
			Seasonal space heating eff. class		A+					
Pump Additional Zone	Nominal ESP unit (*RHQ*B*)	Heating		kPa	26.2 (1.000) / 35.0 (2.000)	25.0 (5.000)		24.8 (1.000) / 28.3 (2.000)	25.0 (5.000)	
Pump Main Zone	Nominal ESP unit (*RHQ*B*)	Heating		kPa	18.2 (1.000) / 28.8 (2.000)	25.0 (5.000)		16.4 (1.000) / 20.7 (2.000)	25.0 (5.000)	
 Domestic hot water heating	General			Declared load profile			L			
	Average climate	ηwh (water heating efficiency)		%	90.5			84.3		
		Water heating energy efficiency class			A					
Indoor Unit				EHVZ	16S18CB3V	16S18CB3V	16S18CB3V	16S18CB3V	16S18CB3V	16S18CB3V
Casing	Colour				White					
	Material				Precoated sheet metal					
Dimensions	Unit	HeightxWidthxDepth		mm	1,732x600x728					
Weight	Unit				121					
Tank	Water volume				180					
	Maximum water temperature				65					
	Maximum water pressure				10					
	Corrosion protection				Anode					
Operation range	Heating	Water side Min.~Max.		°C	15 ~55					
	Domestic hot water	Water side Min.~Max.		°C	25~60 / 60					
Sound power level	Nom.			dBA	44					
Sound pressure level	Nom.			dBA	30					
Outdoor Unit				ERHQ-B	011BV3	014BV3	016BV3	011BW1	014BW17	016BW1
Dimensions	Unit	HeightxWidthxDepth		mm	1,170x900x320			1,345x900x320		
Weight	Unit				102			108		
Compressor	Quantity				1					
	Type				Hermetically sealed scroll compressor					
Operation range	Cooling	Min.~Max.		°CDB	10.0~46.0					
	Domestic hot water	Min.~Max.		°CDB	-20 ~35					
Refrigerant	Type				R-410A					
	GWP				2,087.5					
	Charge				2.7			3.0		
	Charge	TCO ₂ Eq			5.6			6.3		
Sound power level	Heating	Nom.		dBA	64		66	64		66
	Cooling	Nom.		dBA	64	66	69	64	66	69
Sound pressure level	Heating	Nom.		dBA	49	51	53	51		52
	Cooling	Nom.		dBA	50	52	54	50	52	54
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230			W1/3N~/50/400		
Current	Recommended fuses			A	32			20		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma

low temperature split



integrated floor standing unit

without back-up heater

Floor standing air to water heat pump **for heating and hot water**, ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Energy efficient heating only system without back-up heater
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHVH + ERLQ-C		04S18CBV + 004CV3	08S18CBV + 006CV3	08S26CBV + 006CV3	08S26CBV + 008CV3	08S18CBV + 008CV3	11S26CBV + 011CV3	16S26CBV + 014CV3	16S26CBV + 016CV3	11S26CBV + 011CW1	16S26CBV + 014CW1	16S26CBV + 016CW1
Heating capacity	Nom.			kW	4.40(1) / 4.03(2)	6.00(1) / 5.67(2)		7.40(1) / 6.89(2)		11.2(1) / 11.0(2)	14.5(1) / 13.6(2)	16.0(1) / 15.2(2)	11.2(1) / 11.0(2)	14.5(1) / 13.6(2)	16.0(1) / 15.2(2)	
Power input	Heating	Nom.		kW	0.870(1) / 1.13(2)	1.27(1) / 1.59(2)		1.66(1) / 2.01(2)		2.43(1) / 3.10(2)	3.37(1) / 4.10(2)	3.76(1) / 4.66(2)	2.43 (1) / 3.10 (2)	3.37(1) / 4.10(2)	3.76(1) / 4.66(2)	
COP					5.04(1) / 3.58(2)	4.74(1) / 3.56(2)		4.45(1) / 3.42(2)		4.60(1) / 2.75(3) / 3.55(2) / 2.10(4)	4.30(1) / 2.65(3) / 3.32(2) / 2.08(4)	4.25(1) / 2.64(3) / 3.26(2) / 2.09(4)	4.60(1) / 2.75(3) / 3.55(2) / 2.10(4)	4.30(1) / 2.65(3) / 3.32(2) / 2.08(4)	4.25(1) / 2.64(3) / 3.26(2) / 2.09(4)	
 Space heating	Average climate water outlet 55°C	General	SCOP η _s (Seasonal space heating efficiency) Seasonal space heating eff. class	%	3.20 125	3.22 126		3.20 125		3.09 120	3.16 123	3.06 119	3.09 120	3.16 123	3.06 119	
					A++				A+							
	Average climate water outlet 35°C	General	SCOP η _s (Seasonal space heating efficiency) Seasonal space heating eff. class	%	4.52 178	4.29 169		4.34 171		3.98 156	3.90 153	3.80 149	3.98 156	3.90 153	3.80 149	
					A++				A+		A++		A+			
 Domestic hot water heating	General	Declared load profile			L		XL		L	XL						
	Average climate	η _{wh} (water heating efficiency) %			95.0	86.4	90.0	86.4	97.7						97.7	
		Water heating energy efficiency class			A											
Indoor Unit				EHVH	04S18CBV	08S18CBV	08S26CBV	08S26CBV	08S18CBV	11S26CBV	16S26CBV	16S26CBV	11S26CBV	16S26CBV	16S26CBV	
Casing	Colour				White											
	Material				Precoated sheet metal											
Dimensions	Unit	HeightxWidthxDepth		mm	1,732x600x728											
Weight	Unit	kg			116	117	125		117	124	126		124		126	
Tank	Water volume	l			180		260		180	260						
	Maximum water temperature	°C			65											
	Maximum water pressure	bar			10											
	Corrosion protection				Anode											
Operation range	Heating	Water side	Min.~Max.	°C	10 ~55.0					10 ~55.0						
	Domestic hot water	Water side	Min.~Max.	°C	25~70											
Sound power level	Nom.	dBA			42.0					44.0		42.0	44.0			
Sound pressure level	Nom.	dBA			28.0					30.0		28.0	30.0			
Outdoor Unit				ERLQ-C	004CV3	006CV3	006CV3	008CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1	
Dimensions	Unit	HeightxWidthxDepth		mm	735x832x307						1,345x900x320					
Weight	Unit	kg			54	56			113						114	
Compressor	Quantity				1											
	Type				Hermetically sealed swing compressor						Hermetically sealed scroll compressor					
Operation range	Cooling	Min.~Max.		°CDB	10.0~43.0						10.0~46.0					
	Domestic hot water	Min.~Max.		°CDB	-25 ~35						-20 ~35					
Refrigerant	Type				R-410A											
	GWP				2,087.5											
	Charge	kg			1.5	1.6			3.4							
	Charge	TCO ₂ Eq			3.1	3.3			7.1							
	GWP				2,087.5											
Sound power level	Heating	Nom.		dBA	61			62	64		66	66	64		66	
	Cooling	Nom.		dBA	63					64	66	69	64	66	69	
Sound pressure level	Heating	Nom.		dBA	48			49	51		52	52	51		52	
	Cooling	Nom.		dBA	48	49		50			52	54	50	52	54	
Power supply	Name/Phase/Frequency/Voltage				Hz/V				V3/1~/50/230				W1/3N~/50/400			
Current	Recommended fuses				A				16		20	40		20		



(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit without back-up heater

Floor standing air to water heat pump for heating and
hot water, ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Energy efficient heating only system without back-up heater
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHVH + ERHQ-B	11S26CBV + 011BV3	16S26CBV + 014BV3	16S26CBV + 016BV3	11S26CBV + 011BW1	16S26CBV + 014BW17	16S26CBV + 016BW1	
Heating capacity	Nom.			kW	11.2 (1) / 10.3(2)	14.0 (1) / 13.1(2)	16.0 (1) / 15.2(2)	11.3 (1) / 11.0(2)	14.5 (1) / 13.6(2)	16.1 (1) / 15.1(2)	
Power input	Heating	Nom.		kW	2.55 (1) / 3.17(2)	3.26 (1) / 4.04(2)	3.92 (1) / 4.75(2)	2.63 (1) / 3.24(2)	3.42 (1) / 4.21(2)	3.82 (1) / 4.69(2)	
COP					4.39 (1) / 3.25(2)	4.29 (1) / 3.24(2)	4.08 (1) / 3.20(2)	4.30 (1) / 3.39(2)	4.24 (1) / 3.22(2)	4.20 (1) / 3.22(2)	
	Average climate water outlet 55°C	General	SCOP		2.86	2.82	2.92	2.90	2.86	2.96	
			η _{sp} (Seasonal space heating efficiency)	%	112	110	114	113	111	115	
					A+						
	Average climate water outlet 35°C	General	SCOP		2.99	3.23	3.29	3.08	3.34	3.33	
			η _{sp} (Seasonal space heating efficiency)	%	117	126	129	120	131	130	
					A	A+		A	A+		
	General	Declared load profile			XL						
	Average climate	η _{wh} (water heating efficiency)		%	95.3				87.3		
		Water heating energy efficiency class			A						
Indoor Unit				EHVH	11S26CBV	16S26CBV	16S26CBV	11S26CBV	16S26CBV	16S26CBV	
Casing	Colour				White						
	Material				Precoated sheet metal						
Dimensions	Unit	HeightxWidthxDepth		mm	1,732x600x728						
Weight	Unit			kg	124	126		124	126		
Tank	Water volume			l	260						
	Maximum water temperature			°C	65						
	Maximum water pressure			bar	10						
	Corrosion protection				Anode						
Operation range	Heating	Water side Min.~Max.		°C	10 ~55.0						
	Domestic hot water	Water side Min.~Max.		°C	25~70						
Sound power level	Nom.			dBA	42.0	44.0		42.0	44.0		
Sound pressure level	Nom.			dBA	28.0	30.0		28.0	30.0		
Outdoor Unit				ERHQ-B	011BV3	014BV3	016BV3	011BW1	014BW17	016BW1	
Dimensions	Unit	HeightxWidthxDepth		mm	1,170x900x320				1,345x900x320		
Weight	Unit			kg	102				108		
Compressor	Quantity				1						
	Type				Hermetically sealed scroll compressor						
Operation range	Cooling	Min.~Max.		°CDB	10.0~46.0						
	Domestic hot water	Min.~Max.		°CDB	-20 ~35						
Refrigerant	Type				R-410A						
	GWP				2,087.5						
	Charge			kg	2.7				3.0		
	Charge			TCO ₂ Eq	5.6				6.3		
Sound power level	Heating	Nom.	dBA	64		66		64		66	
	Cooling	Nom.	dBA	64	66	69	64	66	69		
Sound pressure level	Heating	Nom.	dBA	49	51	53	51		52		
	Cooling	Nom.	dBA	50	52	54	50	52	54		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230				W1/3N~/50/400		
Current	Recommended fuses			A	32				20		



(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit for UK

Floor standing air to water heat pump **for heating and hot water**, ideal for low energy houses

- › Integrated indoor unit: pre-plumbed and pre-wired indoor unit for a simpler, hassle free and neater heating and hot water installation
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHVH + ERLQ-C		04SU18CB6W	08SU18CB6W	08SU26CB6W	08SU26CB6W	08SU18CB6W	11SU26CB6W	16SU26CB6W	16SU26CB6W	11SU26CB6W	16SU26CB6W	16SU26CB6W		
					+ 004CV3	+ 006CV3	+ 006CV3	+ 008CV3	+ 008CV3	+ 011CV3	+ 014CV3	+ 016CV3	+ 011CW1	+ 014CW1	+ 016CW1			
Heating capacity	Nom.			kW	4.40(1) / 4.03(2)	6.00(1) / 5.67(2)		7.40(1) / 6.89(2)		11.2(1) / 11.0(2)	14.5(1) / 13.6(2)	16.0(1) / 15.2(2)	11.2(1) / 11.0(2)	14.5(1) / 13.6(2)	16.0(1) / 15.2(2)			
Power input	Heating	Nom.		kW	0.870(1) / 1.13(2)	1.27(1) / 1.59(2)		1.66(1) / 2.01(2)		2.43(1) / 3.10(2)	3.37(1) / 4.10(2)	3.76(1) / 4.66(2)	2.43(1) / 3.10(2)	3.37(1) / 4.10(2)	3.76(1) / 4.66(2)			
COP					5.04(1) / 3.58(2)	4.74(1) / 3.56(2)		4.45(1) / 3.42(2)		4.60(1) / 2.75(3) / 3.55(2) / 2.10(4)	4.30(1) / 2.65(3) / 3.32(2) / 2.08(4)	4.25(1) / 2.64(3) / 3.26(2) / 2.09(4)	4.60(1) / 2.75(3) / 3.55(2) / 2.10(4)	4.30(1) / 2.65(3) / 3.32(2) / 2.08(4)	4.25(1) / 2.64(3) / 3.26(2) / 2.09(4)			
	Average climate water outlet 55°C	General	SCOP	%	3.20	3.22		3.20		3.09	3.16	3.06	3.09	3.16	3.06			
			ηs (Seasonal space heating efficiency)	%	125	126		125		120	123	119	120	123	119			
	Average climate water outlet 35°C	General	SCOP	%	4.52	4.29		4.34		3.98	3.90	3.80	3.98	3.90	3.80			
			ηs (Seasonal space heating efficiency)	%	178	169		171		156	153	149	156	153	149			
				Seasonal space heating eff. class	A++							A+		A++		A+		
	General	Declared load profile			L		XL		L	XL								
	Average climate	ηwh (water heating efficiency)			%	95.0	86.4	90.0		86.4	97.7							
		Water heating energy efficiency class			A													
Indoor Unit					EHVH		04SU18CB6W	08SU18CB6W	08SU26CB6W	08SU26CB6W	08SU18CB6W	11SU26CB6W	16SU26CB6W	16SU26CB6W	11SU26CB6W	16SU26CB6W		
Casing	Colour					White												
	Material					Precoated sheet metal												
Dimensions	Unit	HeightxWidthxDepth	mm	1,732x600x728														
Weight	Unit		kg	118	121	127		121	128	130		128	130					
Tank	Water volume		l	180		260		180	260									
	Maximum water temperature		°C	65														
	Maximum water pressure		bar	10														
	Corrosion protection			Anode														
Operation range	Heating	Water side Min.~Max.	°C	15 ~55.0							15 ~55.0							
	Domestic hot water	Water side Min.~Max.	°C	25~65														
Sound power level	Nom.		dBA	42.0							44.0		42.0	44.0				
Sound pressure level	Nom.		dBA	28.0							30.0		28.0	30.0				
Outdoor Unit					ERLQ-C		004CV3	006CV3	006CV3	008CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1	
Dimensions	Unit	HeightxWidthxDepth	mm	735x832x307												1,345x900x320		
Weight	Unit		kg	54	56					113			114					
Compressor	Quantity			1														
	Type			Hermetically sealed swing compressor							Hermetically sealed scroll compressor							
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0							10.0~46.0							
	Domestic hot water	Min.~Max.	°CDB	-25 ~35							-20 ~35							
Refrigerant	Type			R-410A														
	GWP			2,087.5														
	Charge	kg		1.5	1.6					3.4								
	Charge	TCO ₂ Eq		3.1	3.3					7.1								
	GWP			2,087.5														
Sound power level	Heating	Nom.	dBA	61		62		64		66	66		64	66				
	Cooling	Nom.	dBA	63		62		64		66	69		64	66				
Sound pressure level	Heating	Nom.	dBA	48		49		50		51	52		52	51				
	Cooling	Nom.	dBA	48	49		50			52	54		50	54				
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230													
Current	Recommended fuses			A	16		20		40		20							



(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit for UK














Floor standing air to water heat pump **for heating and hot water**, ideal for low energy houses

- › Integrated indoor unit: pre-plumbed and pre-wired indoor unit for a simpler, hassle free and neater heating and hot water installation
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHVH + ERHQ-B	11SU26CB6W + 011BV3	16SU26CB6W + 014BV3	16SU26CB6W + 016BV3	11SU26CB6W + 011BW1	16SU26CB6W + 014BW17	16SU26CB6W + 016BW1	
Heating capacity	Nom.			kW	11.2(1) / 10.3(2)	14.0(1) / 13.1(2)	16.0(1) / 15.2(2)	11.3(1) / 11.0(2)	14.5(1) / 13.6(2)	16.1(1) / 15.1(2)	
Power input	Heating	Nom.		kW	2.55(1) / 3.17(2)	3.26(1) / 4.04(2)	3.92(1) / 4.75(2)	2.63(1) / 3.24(2)	3.42(1) / 4.21(2)	3.82(1) / 4.69(2)	
COP					4.39(1) / 3.25(2)	4.29(1) / 3.24(2)	4.08(1) / 3.20(2)	4.30(1) / 3.39(2)	4.24(1) / 3.22(2)	4.20(1) / 3.22(2)	
 Space heating	Average climate water outlet 55°C	General	SCOP		2.86	2.82	2.92	2.90	2.86	2.96	
			ηs (Seasonal space heating efficiency)	%	112	110	114	113	111	115	
			Seasonal space heating eff. class	A+							
	Average climate water outlet 35°C	General	SCOP		2.99	3.23	3.29	3.08	3.34	3.33	
			ηs (Seasonal space heating efficiency)	%	117	126	129	120	131	130	
			Seasonal space heating eff. class	A	A+		A	A+			
 Domestic hot water heating	General	Declared load profile			XL						
	Average climate	ηwh (water heating efficiency)	%	95.3							
		Water heating energy efficiency class			A						
Indoor Unit				EHVH	11SU26CB6W	16SU26CB6W	16SU26CB6W	11SU26CB6W	16SU26CB6W	16SU26CB6W	
Casing	Colour			White							
	Material			Precoated sheet metal							
Dimensions	Unit	HeightxWidthxDepth		mm	1,732x600x728						
Weight	Unit				kg	128	130		128	130	
Tank	Water volume			l	260						
	Maximum water temperature			°C	65						
	Maximum water pressure			bar	10						
	Corrosion protection				Anode						
Operation range	Heating	Water side Min.~Max.		°C	15 ~55.0						
	Domestic hot water	Water side Min.~Max.		°C	25~65						
Sound power level	Nom.			dBA	42.0	44.0		42.0	44.0		
Sound pressure level	Nom.			dBA	28.0	30.0		28.0	30.0		
Outdoor Unit				ERHQ-B	011BV3	014BV3	016BV3	011BW1	014BW17	016BW1	
Dimensions	Unit	HeightxWidthxDepth		mm	1,170x900x320			1,345x900x320			
Weight	Unit				kg	102			108		
Compressor	Quantity				1						
	Type				Hermetically sealed scroll compressor						
Operation range	Cooling	Min.~Max.		°CDB	10.0~46.0						
	Domestic hot water	Min.~Max.		°CDB	-20 ~35						
Refrigerant	Type				R-410A						
	GWP				2,087.5						
	Charge				kg	2.7			3.0		
	Charge	TCO2Eq				5.6			6.3		
Sound power level	Heating	Nom.	dBA		64		66	64		66	
	Cooling	Nom.	dBA		64	66	69	64	66	69	
Sound pressure level	Heating	Nom.	dBA		49	51	53	51		52	
	Cooling	Nom.	dBA		50	52	54	50	52	54	
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230			W1/3N~/50/400			
Current	Recommended fuses			A	32			20			

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

			Daikin Altherma R W / F		
		Type	Material name	4-8kW	11-16kW
Controls		LAN adapter	BRP069A62	•	•
		LAN adapter + PV solar connection	BRP069A61	•	•
		Remote user interface (DE, FR, NL, IT)	EKRUCBL1	•	•
		Remote user interface (EN, ES, EL, PT)	EKRUCBL3	•	•
		Remote user interface (EN, SV, NO, FI)	EKRUCBL2	•	•
		Remote user interface (EN, TR, PL, RO)	EKRUCBL4	•	•
		Remote user interface (DE, CS, SL, SK)	EKRUCBL5	•	•
		Remote user interface (EN, HR, HU, BG)	EKRUCBL6	•	•
		Remote user interface (EN, DE, RU, DA)	EKRUCBL7	•	•
		Simplified user interface	EKRUCBSB	•	•
		Room thermostat (wired)	EKRTWA	•	•
		Room thermostat (wireless)	EKRTR1	•	•
Adapter		Centralised controller kit	EKCC-W	•	•
		DCOM gateway	DCOM-LT/IO		
		DCOM gateway	DCOM-LT/MB		
Adapter		Demand PCB	EKR1AHTA	•	•
		Digital I/O PCB	EKR1HBAA	•	•
Back-up heater		Back-up heater kit	EKLBUHCB6W1		•
		Booster heater for tank integrated design	EKBSHCA3V3		•
		Bottom plate heater	EKBPTH16A		•
Drain		Drain kit	EKDK04	•	•
		Drain pan for indoor wall munted	EKHBDPCA2	•	•
		Drain pan for outdoor (excl heater)	EKDP008CA	•	
		Drain pan heater	EKDPH008CA	•	
Filter		Magnetic filter without additives	K.FERNOXTF1	•	•
		Magnetic filter with additive (500ml inhibitor fluid F1)	K.FERNOXTF1FL	•	•
Installation		Bi-Zone kit	BZKA7V3	•	•
		Snowcover	EK016SNCA		•
		U-beams for outdoor	EKFT008CA	•	
		UK tank kit	EKVSU260A		•
Sensor		Remote indoor sensor	KRCS01-1B	•	•
		Remote sensor for outdoor	EKRSCA1	•	
		External sensor	EKRTETS	•	•
Others		PC cable	EKPCCAB1	•	•
		Low sound cover for ERLQ-CV3	EKLN-A	•	



R-410A



Daikin Altherma R ECH₂O low temperature split integrated ECH₂O

The Daikin Altherma low temperature split integrated ECH₂O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling

Intelligent storage management

- › The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
- › Continuous heating during defrost mode and use of stored heat for space heating (500l tank only)
- › Electronic management of both heat pump and ECH₂O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
- › Achieves the highest standards for water sanitation
- › Uses more renewable energy with solar connection

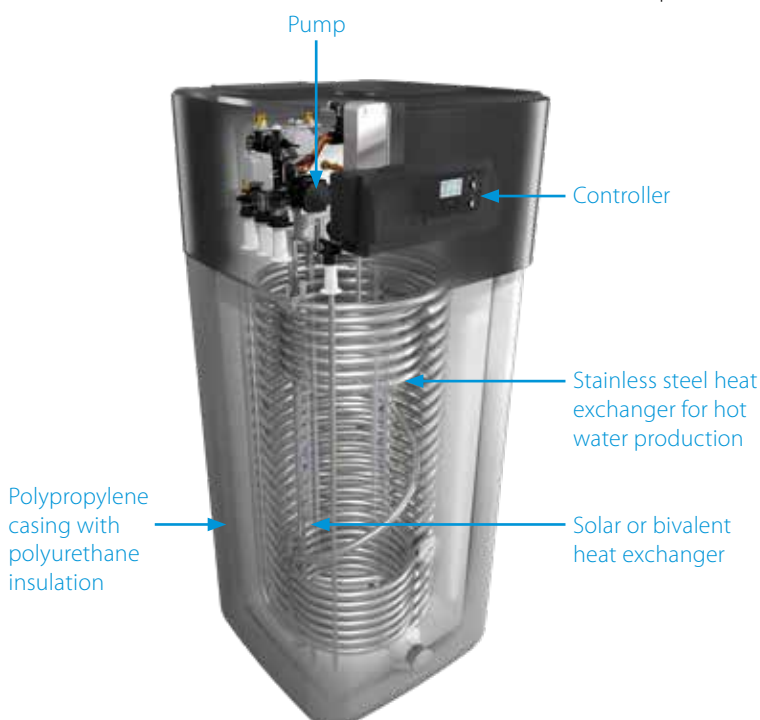
Innovative and high-quality tank

- › Lightweight plastic tank
- › No corrosion, anode, scale or lime deposits
- › Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

Combinable with other heat sources

- › The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

ECH₂O





ECH₂O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

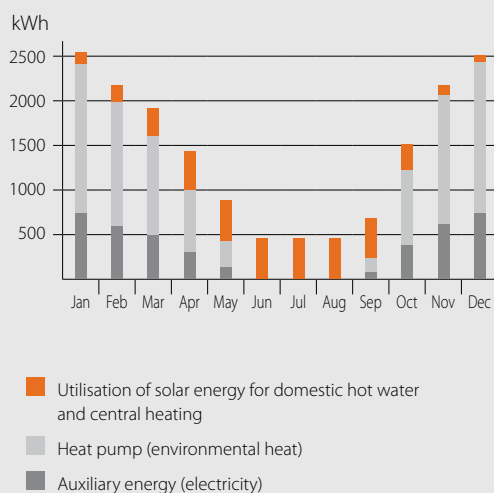
Pressureless (drain-back) solar system (EHSB-B, EHSX-B)

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

Pressurised solar system (EHSB-B, EHSX-B)


- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed

Monthly energy consumption of an average detached house



System diagram: Integrated solar unit

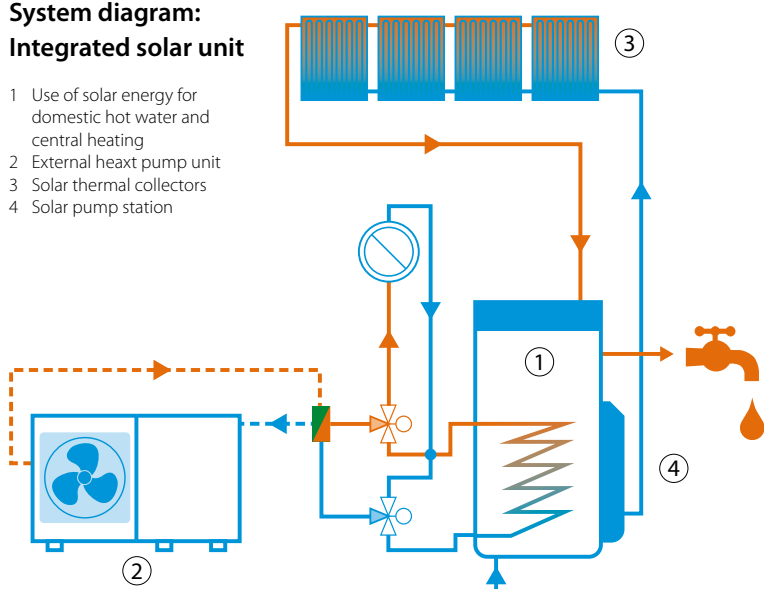- 1 Use of solar energy for domestic hot water and central heating
- 2 External heat pump unit
- 3 Solar thermal collectors
- 4 Solar pump station



Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for heating and hot water with thermal solar support

- Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- Solar support of domestic hot water with pressureless (drain-back) solar system
- Intelligent Heat Store management: continuous heating during defrost mode, and use of stored heat for space heating
- Heat loss is reduced to a minimum thanks to the high quality insulation
- Possible to connect to photovoltaic solar panels to provide energy for your heat pump



011-1W0087 → 95



Efficiency data				EHSB + ERLQ-C	04P30B + 004CV3	08P30B + 006CV3	08P50B + 006CV3	08P30B + 008CV3	08P50B + 008CV3	16P50B + 011CV3	16P50B + 014CV3	16P50B + 016CV3	16P50B + 011CW1	16P50B + 014CW1	16P50B + 016CW1
Heating capacity	Nom.			kW	4.26(1) / 3.47(2) / 4.53(3) / 3.98(4)	5.14(1) / 4.60(2) / 6.06(3) / 5.78(4)		5.53(1) / 5.51(2) / 7.78(3) / 7.27(4)		5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	8.28(1) / 9.57(2) / 14.86(2) / 13.73(4)	15.34(1) / 14.86(2) / 8.04(3) / 10.05(4)	5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	8.28(1) / 9.57(2) / 14.81(3) / 13.73(4)	8.04(1) / 10.05(2) / 15.34(3) / 14.86(4)
Power input	Heating	Nom.		kW	0.87(1) / 1.04(2) / 1.49(3) / 0.85(4)	1.30(1) / 1.58(2) / 1.88(3) / 1.26(4)		1.69(1) / 2.04(2) / 1.98(3) / 1.56(4)		2.57(1) / 3.13(2) / 2.43(3) / 2.35(4)	3.42(1) / 4.07(2) / 3.17(3) / 2.93(4)		2.57(1) / 3.13(2) / 2.43(3) / 2.35(4)	3.42(1) / 4.07(2) / 3.17(3) / 2.93(4)	
COP					5.23(1) / 3.84(2) / 2.85(3) / 4.07(4)	4.65(1) / 3.66(2) / 2.73(3) / 3.64(4)		4.60(1) / 3.57(2) / 2.78(3) / 3.54(4)		4.38(1) / 3.32(2) / 2.45(3) / 3.29(4)	4.27(1) / 3.34(2) / 2.58(3) / 3.22(4)	4.10(1) / 3.22(2) / 2.44(3) / 3.15(4)	4.38(1) / 3.32(2) / 2.45(3) / 3.29(4)	4.27(1) / 3.34(2) / 2.58(3) / 3.22(4)	4.10(1) / 3.22(2) / 2.44(3) / 3.15(4)
Space heating	Average climate water outlet 55°C	General	η _{sp} (Seasonal space heating efficiency)	%	130	125		127		125	126	125		126	125
			Seasonal space heating eff. class		A++										
Domestic hot water heating	General	Declared load profile			L		XL	L	XL						
	Average climate	η _{wh} (water heating efficiency)	%		103	98	102	90	96	83					
		Water heating energy efficiency class			A										

Indoor Unit		EHSB	04P30B	08P30B	08P50B	08P30B	08P50B	16P50B
Casing	Colour	Traffic white (RAL9016) / Dark grey (RAL7011)						
	Material	Impact resistant polypropylene						
Dimensions	Unit	HeightxWidthxDepth	mm					
			1,945 / 1,890x615x595	1,945 / 1,890x790 x790	1,945 / 1,890x615 x595			1,945 / 1,890x790x790
Weight	Unit		kg	84	111	84	111	113
Tank	Water volume		l	294	477	294		477
	Maximum water temperature		°C	85				
Operation range	Heating	Ambient	Min.~Max.	°C				-25~25
		Water side	Min.~Max.	°C				15~55
	Domestic	Ambient	Min.~Max.	°CDB				-25~35
	hot water	Water side	Min.~Max.	°C				25~55
Sound power level	Nom.			dBA				40
Sound pressure level	Nom.			dBA				28

Outdoor Unit				ERLQ-C	004CV3	006CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1		
Dimensions	Unit	HeightxWidthxDepth	mm	735x832x307				1,345x900x320							
Weight	Unit		kg	54	56			113			114				
Compressor	Quantity			1											
	Type			Hermetically sealed swing compressor				Hermetically sealed scroll compressor							
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0				10.0~46.0							
	Domestic hot water	Min.~Max.	°CDB	-25 ~35				-20 ~35							
Refrigerant	Type			R-410A											
	GWP			2,087.5											
	Charge		kg	1.5	1.6			3.4							
	Charge		TCO ₂ Eq	3.1	3.3			7.1							
	Control			Expansion valve (electronic type)											
Sound power level	Heating	Nom.	dBA	61			62		64		66	64		66	
	Cooling	Nom.	dBA	63					64		66	69	64		66
Sound pressure level	Heating	Nom.	dBA	48			49		51		52	51		52	52
	Cooling	Nom.	dBA	48	49		50			52		54	50	52	54
Power supply	Name/Phase/Frequency/Voltage		Hz/V	V3/1~/50/230								W1/3N~/50/400			
Current	Recommended fuses		A	16			20		40			20			

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) EW 30°C; LW 35°C; ambient conditions: -7°CDB/-8°CWB (4) EW 30°C; LW 35°C; ambient conditions: 2°CDB/1°CWB (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for bivalent heating
and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Intelligent Heat Store management: continuous heating during defrost mode, and use of stored heat for space heating
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



Efficiency data					EHSB + ERLQ-C		04P30B + 004CV3	08P30B + 006CV3	08P50B + 006CV3	08P30B + 008CV3	08P50B + 008CV3	16P50B + 011CV3	16P50B + 014CV3	16P50B + 016CV3	16P50B + 011CW1	16P50B + 014CW1	16P50B + 016CW1
Heating capacity	Nom.			kW			4.26(1) / 3.47(2) / 4.53(3) / 3.98(4)	5.14(1) / 4.60(2) / 6.06(3) / 5.78(4)		5.53(1) / 5.51(2) / 7.78(3) / 7.27(4)		5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	14.81(1) / 13.73(2) / 8.28(3) / 9.57(4)	15.34(1) / 14.86(2) / 8.04(3) / 10.05(4)	5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	8.28(1) / 9.57(2) / 14.81(3) / 13.73(4)	8.04 / 10.05 / 15.34 / 14.86
Power input	Heating	Nom.		kW			0.87(1) / 1.04(2) / 1.49(3) / 0.85(4)	1.30(1) / 1.58(2) / 1.88(3) / 1.26(4)		1.69(1) / 2.04(2) / 1.98(3) / 1.56(4)		2.57(1) / 2.43(3) / 2.35(4)	3.42(1) / 3.17(3) / 2.93(4)	4.07(2) / 2.93(4)	2.57(1) / 2.43(3) / 2.35(4)	3.42(1) / 3.17(3) / 2.93(4)	3.42 / 4.07 / 3.17 / 2.93
COP							5.23(1) / 1.04(2) / 2.85(3) / 4.07(4)	4.65(1) / 3.66(2) / 2.73(3) / 3.64(4)		4.60(1) / 3.57(2) / 2.78(3) / 3.54(4)		4.38(1) / 3.32(2) / 2.45(3) / 3.29(4)	4.27(1) / 3.34(2) / 2.58(3) / 3.22(4)	4.10(1) / 3.22(2) / 2.44(3) / 3.15(4)	4.38(1) / 3.32(2) / 2.45(3) / 3.29(4)	4.27(1) / 3.34(2) / 2.58(3) / 3.22(4)	4.10 / 4.07 / 3.22 / 3.15
Space heating	Average climate water outlet 55°C	General	η _s (Seasonal space heating efficiency)	%			130	125		127		125	126		125	126	125
					A++												
Domestic hot water heating	General	Declared load profile					L	XL		L					XL		
	Average climate	η _{wh} (water heating efficiency)	%				103	98	108	90	99				84		
					A												

Indoor Unit				EHSB	04P30B	08P30B	08P50B	08P30B	08P50B	16P50B	16P50B	16P50B	16P50B	16P50B	16P50B
Casing	Colour				Traffic white (RAL9016) / Dark grey (RAL7011)										
	Material				Impact resistant polypropylene										
Dimensions	Unit	HeightxWidthxDepth	mm		1,890x615x595	1,890x790x790	1,890x615x595		116			1,890x790x790			
Weight	Unit		kg		89	116	89					118			
Tank	Water volume		l		294	477	294					477			
	Maximum water temperature		°C						85						
Operation range	Heating	Ambient	Min.~Max.	°C				-25~25						-25~35	
		Water side	Min.~Max.	°C					15~55						
	Domestic hot water	Ambient	Min.~Max.	°CDB					-25~35						
		Water side	Min.~Max.	°C					25~55						
Sound power level	Nom.			dBA					40						
Sound pressure level	Nom.			dBA					28						


Outdoor Unit				ERLQ-C	004CV3	006CV3	006CV3	008CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1
Dimensions	Unit	HeightxWidthxDepth	mm		735x832x307						1,345x900x320				
Weight	Unit		kg		54		56				113			114	
Compressor	Quantity									1					
	Type				Hermetically sealed swing compressor						Hermetically sealed scroll compressor				
Operation range	Cooling	Min.~Max.	°CDB		10.0~43.0						10.0~46.0				
	Domestic hot water	Min.~Max.	°CDB		-25~35						-20~35				
Refrigerant	Type				R-410A										
	GWP				2,087.5										
	Charge		kg		1.5		1.6					3.4			
	Charge		TCO ₂ Eq		3.1		3.3					7.1			
	Control				Expansion valve (electronic type)										
Sound power level	Heating	Nom.	dBA		61		62			64		66		64	66
	Cooling	Nom.	dBA			63				64	66	69		64	69
Sound pressure level	Heating	Nom.	dBA		48		49		50		51		52	51	52
	Cooling	Nom.	dBA		48		49		50		51		52	51	52
Power supply	Name/Phase/Frequency/Voltage		Hz/V		V3/1~/50/230						52	54	50	52	54
Current	Recommended fuses		A		16						40				
					20						20				

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) EW 30°C; LW 35°C; ambient conditions: -7°CDB/-8°CWB (4) EW 30°C; LW 35°C; ambient conditions: 2°CDB/1°CWB (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for heating, cooling and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating, hot water and cooling
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Intelligent Heat Store management: continuous heating during defrost mode, and use of stored heat for space heating
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



011-1W0096 → 104



A++



A

55°C

R-410A

Efficiency data				EHSX + ERLQ-C		04P30B + 004CV3	08P50B + 006CV3	08P30B + 006CV3	08P30B + 008CV3	08P50B + 008CV3	16P50B + 011CV3	16P50B + 014CV3	16P50B + 016CV3	16P50B + 011CW1	16P50B + 014CW1	16P50B + 016CW1					
Heating capacity	Nom.					kW	4.26(1) / 3.47(2) / 4.53(3) / 3.98(4)	5.14(1) / 4.60(2) / 6.06(3) / 5.78(4)		5.53(1) / 5.51(2) / 7.78(3) / 7.27(4)		5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	14.81(1) / 13.73(2) / 8.28(3) / 9.57(4)	15.34(1) / 14.86(2) / 8.04(3) / 10.05(4)	5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	8.28(1) / 9.57(2) / 14.81(3) / 13.73(4)	8.04 / 10.05 / 15.34 / 14.86				
Cooling capacity	Nom.					kW	4.4(1) / 4.0(2)	5.2(1) / 4.6(2)			15.1(1) / 11.7(2)		16.1(1) / 12.6(2)	16.8(1) / 13.1(2)	15.1(1) / 11.7(2)	16.1(1) / 12.6(2)	16.8 / 13.1				
Power input	Heating	Nom.				kW	0.87(1) / 1.04(2) / 1.49(3) / 0.85(4)	1.30(1) / 1.58(2) / 1.88(3) / 1.26(4)		1.69(1) / 2.04(2) / 1.98(3) / 1.56(4)		2.57(1) / 3.13(2) / 2.43(3) / 2.35(4)	3.42(1) / 3.17(3) / 2.93(4)		4.07(2) / 2.35(4)	2.57(1) / 3.13(2) / 2.43(3) / 2.35(4)	3.42(1) / 4.07(2) / 3.17(3) / 2.93(4)	3.42 / 4.07 / 3.17 / 2.93			
	Cooling	Nom.				kW	1.05(1) / 1.41(2)	1.43(1) / 1.85(2)			4.55(1) / 4.30(2)		5.44(1) / 5.10(2)	6.18(1) / 5.72(2)	4.55(1) / 4.30(2)	5.44(1) / 5.10(2)	6.18 / 5.72				
COP							5.23(1) / 3.84(2) / 2.85(3) / 4.07(4)	4.65(1) / 3.66(2) / 2.73(3) / 3.64(4)		4.60(1) / 3.57(2) / 2.78(3) / 3.54(4)		4.38(1) / 3.32(2) / 2.45(3) / 3.29(4)	4.27(1) / 3.34(2) / 2.58(3) / 3.22(4)	4.10(1) / 3.22(2) / 2.44(3) / 3.15(4)	4.38(1) / 3.32(2) / 2.45(3) / 3.29(4)	4.27(1) / 3.34(2) / 2.58(3) / 3.22(4)	4.10 / 3.22 / 2.44 / 3.15				
EER							4.21(1) / 2.85(2)	3.65(1) / 2.51(2)			3.32(1) / 2.72(2)		2.96(1) / 2.47(2)	2.72(1) / 2.29(2)	3.32(1) / 2.72(2)	2.96(1) / 2.47(2)	2.72 / 2.29				
Space heating	Average climate water outlet 55°C	General	η _s (Seasonal space heating efficiency)	%			132	126		128		130	127	128	130	127					
Domestic hot water heating	Average climate	General	Declared load profile η _{wh} (water heating efficiency)	%	Water heating energy efficiency class	A++															
						L	XL		L				XL								
						103	102	98	90	96				83							
						A															
Indoor Unit						EHSX		04P30B	08P50B	08P30B	08P30B	08P50B	16P50B	16P50B	16P50B	16P50B	16P50B				
Casing	Colour					Traffic white (RAL9016) / Dark grey (RAL7011)															
	Material					Impact resistant polypropylene															
Dimensions	Unit	HeightxWidthxDepth			mm	1,890x615x595	1,890x790x790	1,890x615x595		1,890x790x790			1,945 / 1,890x790x790	1,890x790x790	1,945 / 1,890x790x790						
Weight	Unit				kg	84	111	84		111		116		113	116	113					
Tank	Water volume				l	294	477	294					477								
Operation range	Maximum water temperature				°C	85															
	Heating	Ambient	Min.~Max.		°C	-25~25					-25~35										
		Water side	Min.~Max.		°C	15~55															
	Cooling	Ambient	Min.~Max.		°CDB	10~43															
		Water side	Min.~Max.		°C	5~22															
	Domestic hot water	Ambient	Min.~Max.		°CDB						-25~35		-25~55								
Sound power level	Nom.					dBA	40														
Sound pressure level	Nom.					dBA	28														
Outdoor Unit						ERLQ-C		004CV3	006CV3	006CV3	008CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1			
Dimensions	Unit	HeightxWidthxDepth			mm	54		735x832x307						1,345x900x320				114			
Weight	Unit				kg			56						113							
Compressor	Quantity					1															
Operation range	Type					Hermetically sealed swing compressor												Hermetically sealed scroll compressor			
	Cooling	Min.~Max.		°CDB		10.0~43.0					10.0~46.0										
Refrigerant	Domestic hot water	Min.~Max.		°CDB		-25~35					-20~35										
	Type					R-410A															
	GWP					2,087.5															
	Charge		kg			1.5	1.6														
	Charge		TCO ₂ Eq			3.1	3.3														
	Control					Expansion valve (electronic type)															
Sound power level	Heating	Nom.		dBA		61				62		64		66			64	66			
	Cooling	Nom.		dBA				63				64		66	69		64	66			
Sound pressure level	Heating	Nom.		dBA		48				49		51		52	54		51	52			
	Cooling	Nom.		dBA		48	49		50		52		54	50		52	54				
Power supply	Name/Phase/Frequency/Voltage					Hz/V		V3/1~/50/230										W1/3N~/50/400			
Current	Recommended fuses					A		16		20		40		20							

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) EW 30°C; LW 35°C; ambient conditions: -7°CDB/-8°CWB (4) EW 30°C; LW 35°C; ambient conditions: 2°CDB/1°CWB (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for bivalent
heating, cooling and hot water with thermal solar support

› Bivalent system: combinable with a secondary heat source

Options



011-1W0096 → 104

	Type	Material name
Controls	Room thermostat RoCon U1	EHS157034
	Gateway RoCon G1 for apps	EHS157056
	Connection kit for MK1	VMK1
Back-up heater	Back-up heater 1kW	EKBUC1C
	Back-up heater 3kW	EKBUC3C
	Back-up heater 9kW	EKBUC9C
Installation	Heat insulation for hydraulic separator (HWC)	WHWC
	Separator for dirt	SAS1
	Separator - hydraulic	HWC
Sensor	External sensor	EKRTETS
	Outdoor sensor for Rocon Controller	RoCon OT1
Others	Mixer module RoCon M1	EHS157068
	Low sound cover for ERLQ-CV3	EKLN-A



A++



A

55°C

R-410A

Heat pumps

Efficiency data				EHSXB + ERLQ-C		04P30B + 004CV3	08P30B + 006CV3	08P50B + 006CV3	08P30B + 008CV3	08P50B + 008CV3	16P50B + 011CV3	16P50B + 014CV3	16P50B + 016CV3	16P50B + 011CW1	16P50B + 014CW1	16P50B + 016CW1
Heating capacity	Nom.			kW		4.26(1) / 3.47(2) / 4.53(3) / 3.98(4)	5.14(1) / 4.60(2) / 6.06(3) / 5.78(4)		5.53(1) / 5.51(2) / 7.78(3) / 7.27(4)		5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	14.81(1) / 13.73(2) / 8.28(3) / 9.57(4)	15.34(1) / 14.86(2) / 8.04(3) / 10.05(4)	5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	8.28(1) / 9.57(2) / 14.81(3) / 13.73(4)	8.04 / 10.05 / 15.34 / 14.86
Cooling capacity	Nom.			kW		4.4(1) / 4.0(2)	5.2(1) / 4.6(2)				11.7(2) / 12.6(2) / 13(2)	14.81(1) / 13.73(2) / 8.28(3) / 9.57(4)	15.34(1) / 14.86(2) / 8.04(3) / 10.05(4)	5.95(1) / 7.74(2) / 11.80(3) / 10.40(4)	8.28(1) / 9.57(2) / 14.81(3) / 13.73(4)	8.04 / 10.05 / 15.34 / 14.86
Power input	Heating	Nom.		kW		0.87(1) / 1.04(2) / 1.49(3) / 0.85(4)	1.30(1) / 1.58(2) / 1.88(3) / 1.26(4)		1.69(1) / 2.04(2) / 1.98(3) / 1.56(4)		2.57 / 3.13 / 2.43 / 2.35	3.42(1) / 4.07(2) / 2.93(4)	4.07(2) / 4.30(2) / 3.32(2) / 2.44(3)	2.57(1) / 3.42(1) / 2.35(4) / 2.93(4)	3.42(1) / 4.07(2) / 3.17(3) / 2.93(4)	3.42 / 4.07 / 3.17 / 2.93
	Cooling	Nom.		kW		1.05(1) / 1.41(2)	1.43(1) / 1.85(2)		4.60(1) / 3.57(2) / 2.78(3) / 3.54(4)		4.55(1) / 4.30(2) / 4.38(1) / 3.22(2) / 2.45(3) / 3.29(4)	5.44(1) / 5.10(2) / 4.27(1) / 3.34(2) / 2.58(3) / 3.15(4)	6.18(1) / 5.72(2) / 4.10(1) / 3.22(2) / 2.44(3) / 3.15(4)	4.55(1) / 4.30(2) / 4.38(1) / 3.32(2) / 2.45(3) / 3.22(4)	5.44(1) / 5.10(2) / 4.27(1) / 3.34(2) / 2.58(3) / 3.22(4)	6.18 / 5.72 / 4.10 / 3.22 / 2.44 / 3.15
COP						5.23(1) / 3.84(2) / 2.85(3) / 4.07(4)	4.65(1) / 3.66(2) / 2.73(3) / 3.64(4)		4.60(1) / 3.57(2) / 2.78(3) / 3.54(4)		3.32(1) / 2.72(2) / 2.96(1) / 2.47(2) / 2.72(1) / 2.29(2)	3.32(1) / 2.72(2) / 2.96(1) / 2.47(2) / 2.72(1) / 2.29(2)	3.32(1) / 2.72(2) / 2.96(1) / 2.47(2) / 2.72(1) / 2.29(2)	3.32(1) / 2.72(2) / 2.96(1) / 2.47(2) / 2.72(1) / 2.29(2)	3.32(1) / 2.72(2) / 2.96(1) / 2.47(2) / 2.72(1) / 2.29(2)	3.32(1) / 2.72(2) / 2.96(1) / 2.47(2) / 2.72(1) / 2.29(2)
EER						4.21(1) / 2.85(2)	3.65(1) / 2.51(2)		128		130	127	128	130	127	127
Space heating	Average climate water outlet 55°C	General	η _s (Seasonal space heating efficiency)	%		132	126		128		130	127	128	130	127	127
Domestic hot water heating	General	Declared load profile				L	XL	L			XL					
	Average climate	η _{wh} (water heating efficiency)	%			103	98	108	90	99	84					
		Water heating energy efficiency class									A					

Indoor Unit				EHSXB	04P30B	08P30B	08P50B	08P30B	08P50B	16P50B	16P50B	16P50B	16P50B	16P50B	16P50B
Casing	Colour														
	Material														
Dimensions	Unit	HeightxWidthxDepth	mm		1,890x615x595	1,890x790x790	1,890x615x595			1,890x790x790					
Weight	Unit		kg		89	116	89		116		118				
Tank	Water volume		l		294	477	294			477					
Operation range	Maximum water temperature		°C							85					
	Heating	Ambient	Min.~Max.	°C			-25~25							-25~35	
		Water side	Min.~Max.	°C						15~55					
	Cooling	Ambient	Min.~Max.	°CDB						10~43					
		Water side	Min.~Max.	°C			5~22								
	Domestic hot water	Ambient	Min.~Max.	°CDB						-25~35					
Sound power level	Nom.		dBA							25~55					
	Sound pressure level	Nom.	dBA							40					

Outdoor Unit				ERLQ-C	004CV3	006CV3	006CV3	008CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1
Dimensions	Unit	HeightxWidthxDepth	mm		54			56			113			114	
Weight	Unit		kg												
Compressor	Quantity									1					
	Type									Hermetically sealed swing compressor					
Operation range	Cooling	Min.~Max.	°CDB					10.0~43.0						10.0~46.0	
	Domestic hot water	Min.~Max.	°CDB					-25~35						-20~35	
Refrigerant	Type									R-410A					
	GWP									2,087.5					
	Charge	kg			1.5			1.6						3.4	
	Charge	TCO ₂ Eq			3.1			3.3						7.1	
Sound power level	Control									Expansion valve (electronic type)					
	Heating	Nom.	dBA			61		62		64		66		64	66
	Cooling	Nom.	dBA				63			64	66	69		64	66
	Sound pressure level	Nom.	dBA			48		49		51		52		51	52
Power supply	Heating	Nom.	dBA		48		49		50		52		54	50	52
	Cooling	Nom.	dBA												
Current	Name/Phase/Frequency/Voltage	Hz/V						V3/1~/50/230						W1/3N~/50/400	
	Recommended fuses	A				16		20		40				20	

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) EW 30°C; LW 35°C; ambient conditions: -7°CDB/-8°CWB (4) EW 30°C; LW 35°C; ambient conditions: 2°CDB/1°CWB (5) Contains fluorinated greenhouse gases

R-410A

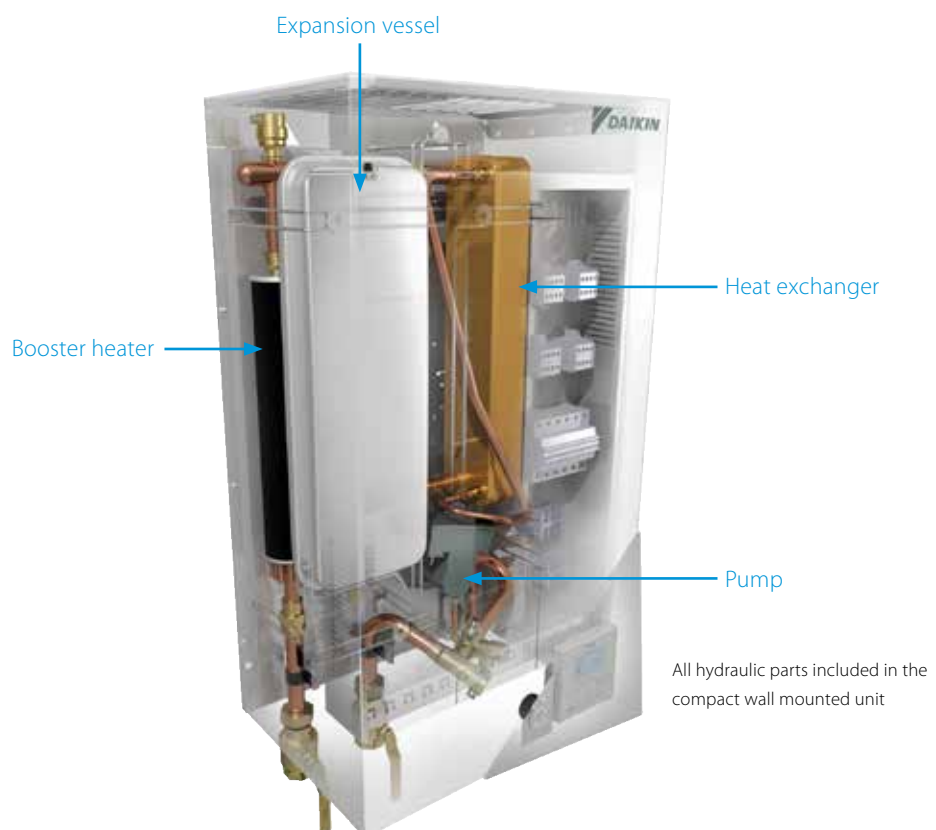


Daikin Altherma R W low temperature split wall mounted unit

The Daikin Altherma low temperature split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water

High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third-party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › The unit's sleek design blends in with other household appliances
- › Combine with a stainless steel, enameled or **ECH₂O** thermal store





Stainless steel and enameled tanks

If the end user only requires hot water and installation height is limited, a separate tank can be connected (either stainless steel or enameled).

ECH₂O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

Built for small and large homes, customers can choose between a pressureless and pressurised hot water system.



Stainless steel tank



Wall mounted unit combined with ECH₂O thermal store


Daikin Altherma

low temperature split wall mounted unit

Wall mounted **heating only** air to water heat pump ideal
for low energy houses

- › Wall mounted indoor unit
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHBH + ERLQ-C	04CB3V + 004CV3	08CB3V/9W + 006CV3	08CB9W/3V + 008CV3	11CB3V/9W + 011CV3	16CB3V/9W + 014CV3	16CB3V/9W + 016CV3	11CB3V/9W + 011CW1	16CB3V/9W + 014CW1	16CB3V/9W + 016CW1											
Heating capacity	Nom.			kW	4.40 (1) / 4.03(2)	6.00 (1) / 5.67(2)	7.40 (1) / 6.89(2)	11.2 (1) / 11.0(2)	14.5 (1) / 13.6(2)	16.0 (1) / 15.2(2)	11.2 (1) / 11.0(2)	14.5 (1) / 13.6(2)	16.0 (1) / 15.2(2)											
Power input	Heating	Nom.		kW	0.870 (1) / 1.13(2)	1.27 (1) / 1.59(2)	1.66 (1) / 2.01(2)	2.43 (1) / 3.10(2)	3.37 (1) / 4.10(2)	3.76 (1) / 4.66(2)	2.43 (1) / 3.10 (2)	3.37 (1) / 4.10(2)	3.76 (1) / 4.66(2)											
COP					5.04 (1) / 3.58(2)	4.74 (1) / 3.56(2)	4.45 (1) / 3.42(2)	4.60 (1) / 2.75(2) / 3.55 (3) / 2.10(4)	4.30 (1) / 2.65(2) / 3.32 (3) / 2.08(4)	4.25 (1) / 2.64(2) / 3.26 (3) / 2.09(4)	4.60 (1) / 2.75(2) / 3.55 (3) / 2.10(4)	4.30 (1) / 2.65(2) / 3.32 (3) / 2.08(4)	4.25 (1) / 2.64(2) / 3.26 (3) / 2.09(4)											
 Space heating	Average climate water outlet 55°C	General	SCOP		3.20	3.22	3.20	3.09	3.16	3.06	3.09	3.16	3.06											
			ηs (Seasonal space heating efficiency)	%	125	126	125	120	123	119	120	123	119											
	Average climate water outlet 35°C	General	SCOP		4.52	4.29	4.34	3.98	3.90	3.80	3.98	3.90	3.80											
			ηs (Seasonal space heating efficiency)	%	178	169	171	156	153	149	156	153	149											
				Seasonal space heating eff. class	A++				A+															
				Seasonal space heating eff. class	A++				A+				A++		A+									
Indoor Unit				EHBH	04CB3V	08CB3V/9W	08CB9W/3V	11CB3V/9W	16CB3V/9W	16CB3V/9W	11CB3V/9W	16CB3V/9W	16CB3V/9W											
Casing	Colour				White																			
	Material				Precoated sheet metal																			
Dimensions	Unit	HeightxWidthxDepth	mm		890x480x344																			
Weight	Unit		kg		41.0	43.0	45.0	43.0	44.0	45.0	44.0	45.0	44.0	45.0										
Operation range	Heating	Water side Min.~Max.	°C		15 ~55.0																			
	Domestic hot water	Water side Min.~Max.	°C		25~80																			
Sound power level	Nom.		dBA		40.0			41.0	44.0		41.0	44.0												
Sound pressure level	Nom.		dBA		26.0			27.0	30.0		27.0	30.0												
Outdoor Unit				ERLQ-C	004CV3	006CV3	006CV3	008CV3	008CV3	011CV3	011CV3	014CV3	014CV3	016CV3	016CV3	011CW1	011CW1	014CW1	014CW1	016CW1	016CW1			
Dimensions	Unit	HeightxWidthxDepth	mm		735x832x307					1,345x900x320														
Weight	Unit		kg		54	56			113				114											
Compressor	Quantity				1																			
	Type				Hermetically sealed swing compressor					Hermetically sealed scroll compressor														
Operation range	Cooling	Min.~Max.	°CDB		10.0~43.0					10.0~46.0														
	Domestic hot water	Min.~Max.	°CDB		-25 ~35					-20 ~35														
Refrigerant	Type				R-410A																			
	GWP				2,087.5																			
	Charge		kg		1.5	1.6			3.4															
	Charge		TCO ₂ Eq		3.1	3.3			7.1															
	GWP				2,087.5																			
Sound power level	Heating	Nom.	dBA		61		62		64		66		64		66									
	Cooling	Nom.	dBA		63				64		66		69		64		66		69					
Sound pressure level	Heating	Nom.	dBA		48		49		51		52		51		52									
	Cooling	Nom.	dBA		48	49		50		52		54		50		52		54						
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230																			
Current	Recommended fuses			A	16			20			40			W1/3N~/50/400										
					16			20			40			20										


(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split wall mounted unit

Wall mounted **heating only** air to water heat pump ideal
for low energy houses

- › Wall mounted indoor unit
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -20°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHBH + ERHQ-B		11CB3V + 011BV3	11CB9W + 011BV3	16CB3V + 014BV3	16CB9W + 014BV3	16CB3V + 016BV3	16CB9W + 016BV3	11CB3V + 011BW1	11CB9W + 011BW1	16CB3V + 014BW17	16CB9W + 014BW17	16CB3V + 016BW1	16CB9W + 016BW1	
Heating capacity	Nom.			kW	11.2 (1) / 10.3(2)		14.0 (1) / 13.1(2)		16.0 (1) / 15.2(2)		11.3 (1) / 11.0(2)		14.5 (1) / 13.6(2)		16.1 (1) / 15.1(2)			
Power input	Heating	Nom.		kW	2.55 (1) / 3.17(2)		3.26 (1) / 4.04(2)		3.92 (1) / 4.75(2)		2.63 (1) / 3.24(2)		3.42 (1) / 4.21(2)		3.82 (1) / 4.69(2)			
COP					4.39 (1) / 3.25(2)		4.29 (1) / 3.24(2)		4.08 (1) / 3.20(2)		4.30 (1) / 3.39(2)		4.24 (1) / 3.22(2)		4.20 (1) / 3.22(2)			
 Space heating	Average climate water outlet 55°C	General	SCOP		2.86		2.82		2.92		2.90		2.86		2.96			
			ηs (Seasonal space heating efficiency)	%	112		110		114		113		111		115			
			Seasonal space heating eff. class		A+													
	Average climate water outlet 35°C	General	SCOP		2.99		3.23		3.29		3.08		3.34		3.33			
			ηs (Seasonal space heating efficiency)	%	117		126		129		120		131		130			
			Seasonal space heating eff. class		A		A+		A		A+							
Indoor Unit					EHBH		11CB3V	11CB9W	16CB3V	16CB9W	16CB3V	16CB9W	11CB3V	11CB9W	16CB3V	16CB9W	16CB3V	16CB9W
Casing	Colour				White													
	Material				Precoated sheet metal													
Dimensions	Unit	HeightxWidthxDepth		mm	890x480x344													
Weight	Unit				kg	43.0	44.0	45.0	44.0	45.0	43.0	44.0	45.0	44.0	45.0	44.0	45.0	
Operation range	Heating	Water side Min.~Max.		°C	15 ~55.0													
	Domestic hot water	Water side Min.~Max.		°C	25~80													
Sound power level	Nom.				dBA	41.0	44.0			41.0			44.0					
Sound pressure level	Nom.				dBA	27.0	30.0			27.0			30.0					
Outdoor Unit					ERHQ-B		011BV3	014BV3	016BV3	011BW1	014BW17	016BW1						
Dimensions	Unit	HeightxWidthxDepth		mm	1,170x900x320						1,345x900x320							
Weight	Unit				kg	102						108						
Compressor	Quantity				1													
	Type				Hermetically sealed scroll compressor													
Operation range	Cooling	Min.~Max.		°CDB	10.0~46.0													
	Domestic hot water	Min.~Max.		°CDB	-20 ~35													
Refrigerant	Type				R-410A													
	GWP				2,087.5													
	Charge	kg			2.7						3.0							
	Charge	TCO ₂ Eq			5.6						6.3							
	GWP				2,087.5													
Sound power level	Heating	Nom.	dBA	64				66		64				66				
	Cooling	Nom.	dBA	64	66		69		64				66		69			
Sound pressure level	Heating	Nom.	dBA	49	51		53		51				52		54			
	Cooling	Nom.	dBA	50	52		54		50				52		54			
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230						W1/3N~/50/400							
Current	Recommended fuses			A	32						20							

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split wall mounted unit

Wall mounted **reversible** air to water heat pump ideal for low energy houses

- › Wall mounted indoor unit
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



011-1W0068 → 78



up to

A++

55°C

R-410A

Efficiency data				EHBX + ERLQ-C		04CB3V + 004CV3	08CB3V / 08CB9W + 006CV3		08CB3V / 08CB9W + 008CV3		11CB3V / 11CB9W + 011CV3		16CB3V / 16CB9W + 014CV3		16CB3V / 16CB9W + 016CV3		11CB3V / 11CB9W + 011CW1		16CB3V / 16CB9W + 014CW1		16CB3V / 16CB9W + 016CW1		
Heating capacity	Nom.				kW	4.40(1) / 4.03(2)		6.00(1) / 5.67(2)		7.40(1) / 6.89(2)		11.2(1) / 11.0(2)		14.5(1) / 13.6(2)		16.0(1) / 15.2(2)		11.2(1) / 11.0(2)		14.5(1) / 13.6(2)		16.0(1) / 15.2(2)	
Cooling capacity	Nom.				kW	4.08(1) / 4.17(2)		5.88(1) / 4.84(2)		6.20(1) / 5.36(2)		12.1(1) / 11.7(2)		12.7(1) / 12.6(2)		13.8(1) / 13.1(2)		12.1(1) / 11.7(2)		12.7(1) / 12.6(2)		13.8(1) / 13.1(2)	
Power input	Heating	Nom.			kW	0.870(1) / 1.13(2)		1.27(1) / 1.59(2)		1.66(1) / 2.01(2)		2.43(1) / 3.10(2)		3.37(1) / 4.10(2)		3.76(1) / 4.66(2)		2.43(1) / 3.10(2)		3.37(1) / 4.10(2)		3.76(1) / 4.66(2)	
	Cooling	Nom.			kW	0.900(1) / 1.80(2)		1.51(1) / 2.07(2)		1.64(1) / 2.34(2)		3.05(1) / 4.31(2)		3.21(1) / 5.08(2)		3.74(1) / 5.73(2)		3.05(1) / 4.31(2)		3.21(1) / 5.08(2)		3.74(1) / 5.73(2)	
COP						5.04(1) / 3.58(2)		4.74(1) / 3.56(2)		4.45(1) / 3.42(2)		4.60(1) / 2.75(2) / 3.55(3) / 2.10(4)		4.30(1) / 2.65(2) / 3.32(3) / 2.08(4)		4.25(1) / 2.64(2) / 3.26(3) / 2.09(4)		4.60(1) / 2.75(2) / 3.55(3) / 2.10(4)		4.30(1) / 2.65(2) / 3.32(3) / 2.08(4)		4.25(1) / 2.64(2) / 3.26(3) / 2.09(4)	
EER						4.55(1) / 2.32(2)		3.89(1) / 2.34(2)		3.79(1) / 2.29(2)		3.98(1) / 2.72(2)		3.96(1) / 2.47(2)		3.69(1) / 2.29(2)		3.98(1) / 2.72(2)		3.96(1) / 2.47(2)		3.69(1) / 2.29(2)	
Space heating	Average climate water outlet 55°C	General	SCOP		3.20	3.22		3.20		3.09		3.16		3.06		3.09		3.16		3.06			
			ηs (Seasonal space heating efficiency)	%	125	126		125		120		123		119		120		123		119			
		Seasonal space heating eff. class		A++						A+													
	Average climate water outlet 35°C	General	SCOP		4.52	4.29		4.34		3.98		3.90		3.80		3.98		3.90		3.80			
		ηs (Seasonal space heating efficiency)	%	178	169		171		156		153		149		156		153		149				
		Seasonal space heating eff. class		A++						A+						A++		A+					
Indoor Unit					EHBX		04CB3V	08CB3V/9W		08CB3V/9W		11CB3V/9W		16CB3V/9W		16CB3V/9W		11CB3V/9W		16CB3V/9W		16CB3V/9W	
Casing	Colour				White																		
	Material				Precoated sheet metal																		
Dimensions	Unit	HeightxWidthxDepth		mm	890x480x344																		
Weight	Unit				kg	42.0	44.0	45.0	44.0	45.0	43.0	45.0	44.0	46.0	44.0	46.0	43.0	45.0	43.0	45.0	43.0	45.0	
Operation range	Heating	Water side Min.~Max.		°C	15 ~55.0																		
	Cooling	Water side Min.~Max.		°C	5.00 ~22.0																		
	Domestic hot water	Water side Min.~Max.		°C	25~80																		
Sound power level	Nom.				dBA	40.0			41.0			44.0		41.0		41.0		41.0					
Sound pressure level	Nom.				dBA	26.0			27.0			30.0		30.0		27.0		27.0		27.0			
Outdoor Unit					ERLQ-C		004CV3	006CV3		008CV3		011CV3		014CV3		016CV3		011CW1		014CW1		016CW1	
Dimensions	Unit	HeightxWidthxDepth		mm	735x832x307					1,345x900x320													
Weight	Unit				kg	54	56			113					114								
Compressor	Quantity				1																		
	Type				Hermetically sealed swing compressor					Hermetically sealed scroll compressor													
Operation range	Cooling	Min.~Max.		°CDB	10.0~43.0					10.0~46.0													
	Domestic hot water	Min.~Max.		°CDB	-25 ~35					-20 ~35													
Refrigerant	Type				R-410A																		
	GWP				2,087.5																		
	Charge	kg			1.5	1.6			3.4														
	Charge	TCO ₂ Eq			3.1	3.3			7.1														
	GWP				2,087.5																		
Sound power level	Heating	Nom.		dBA	61			62		64			66		64			66					
	Cooling	Nom.		dBA	63			64		66			69			64			66				
Sound pressure level	Heating	Nom.		dBA	48			49		51			52		51			52					
	Cooling	Nom.		dBA	48	49		50			52		54		50		52		54				
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230																		
Current	Recommended fuses			A	16			20		40			20										


(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma lowtemperature split wall mounted unit

Wall mounted **reversible** air to water heat pump ideal
for low energy houses

- › Wall mounted indoor unit
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -20°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHBX + ERHQ-B		11CB9W + 011BV3	11CB3V + 011BV3	16CB3V + 014BV3	16CB9W + 014BV3	16CB9W + 016BV3	16CB3V + 016BV3	11CB9W + 011BW1	11CB3V + 011BW1	16CB9W + 014BW17	16CB3V + 014BW17	16CB3V + 016BW1	16CB9W + 016BW1
Heating capacity	Nom.			kW	11.2(1) / 10.3(2)		14.0(1) / 13.1(2)		16.0(1) / 15.2(2)		11.3(1) / 11.0(2)		14.5(1) / 13.6(2)		16.1(1) / 15.1(2)		
Cooling capacity	Nom.			kW	13.9(1) / 10.0(2)		17.3(1) / 12.5(2)		17.8(1) / 13.1(2)		15.1(1) / 11.7(2)		16.1(1) / 12.6(2)		16.8(1) / 13.1(2)		
Power input	Heating	Nom.		kW	2.55(1) / 3.17(2)		3.26(1) / 4.04(2)		3.92(1) / 4.75(2)		2.63(1) / 3.24(2)		3.42(1) / 4.21(2)		3.82(1) / 4.69(2)		
	Cooling	Nom.		kW	3.86(1) / 3.69(2)		5.86(1) / 5.69(2)		6.87(1) / 5.95(2)		4.53(1) / 4.31(2)		5.43(1) / 5.08(2)		6.16(1) / 5.73(2)		
COP					4.39(1) / 3.25(2)		4.29(1) / 3.24(2)		4.08(1) / 3.20(2)		4.30(1) / 3.39(2)		4.24(1) / 3.22(2)		4.20(1) / 3.22(2)		
EER					3.60(1) / 2.71(2)		2.95(1) / 2.32(2)		2.59(1) / 2.20(2)		3.32(1) / 2.72(2)		2.96(1) / 2.47(2)		2.72(1) / 2.29(2)		
 Space heating	Average climate water outlet 55°C	General	SCOP		2.86		2.82		2.92		2.90		2.86		2.96		
			ηs (Seasonal space heating efficiency)	%	112		110		114		113		111		115		
	Seasonal space heating eff. class				A+												
	Average climate water outlet 35°C	General	SCOP		2.99		3.23		3.29		3.08		3.34		3.33		
ηs (Seasonal space heating efficiency)			%	117		126		129		120		131		130			
Seasonal space heating eff. class				A		A+		A		A+							
Indoor Unit				EHBX	11CB9W	11CB3V	16CB3V	16CB9W	16CB3V	11CB9W	11CB3V	16CB9W	16CB3V	16CB9W			
Casing	Colour			White													
	Material																
Dimensions	Unit	HeightxWidthxDepth		mm	Precoated sheet metal												
Weight	Unit			kg	890x480x344												
Operation range	Heating	Water side	Min.~Max.	°C	45.0	43.0	44.0	46.0	44.0	45.0	43.0	46.0	44.0	46.0			
	Cooling	Water side	Min.~Max.	°C	15 ~55.0												
	Domestic hot water	Water side	Min.~Max.	°C	5.00 ~22.0												
					25~80												
Sound power level	Nom.			dBA	41.0		44.0		41.0		44.0						
Sound pressure level	Nom.			dBA	27.0		30.0		27.0		30.0						
Outdoor Unit				ERHQ-B	011BV3	014BV3	016BV3	011BW1	014BW17	016BW1							
Dimensions	Unit	HeightxWidthxDepth		mm	1,170x900x320						1,345x900x320						
Weight	Unit			kg	102						108						
Compressor	Quantity				1												
Operation range	Type				Hermetically sealed scroll compressor												
	Cooling	Min.~Max.	°CDB	10.0~46.0													
Refrigerant	Domestic hot water	Min.~Max.	°CDB	-20 ~35													
	Type				R-410A												
	GWP				2,087.5												
	Charge	kg			2.7						3.0						
	Charge	TCO ₂ Eq				5.6						6.3					
Sound power level	Heating	Nom.	dBA	64						66		64		66			
	Cooling	Nom.	dBA	64	66		69		64		66		69				
Sound pressure level	Heating	Nom.	dBA	49	51		53		51		52		54				
	Cooling	Nom.	dBA	50	52		54		50		52		54				
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230						W1/3N~/50/400						
Current	Recommended fuses			A	32						20						

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); Heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

Daikin Altherma

low temperature split

wall mounted unit

without back-up heater

Wall mounted **heating only** air to water heat pump
without back-up heater

- › Energy efficient heating only system without back-up heater
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



011-1W0068 →78



Efficiency data				EHBH + ERLQ-C	04CBV + 004CV3	08CBV + 006CV3	08CBV + 008CV3	11CBV + 011CV3	16CBV + 014CV3	16CBV + 016CV3	11CBV + 011CW1	16CBV + 014CW1	16CBV + 016CW1
Heating capacity	Nom.			kW	4.40(1) / 4.03(2)	6.00(1) / 5.67(2)	7.40(1) / 6.89(2)	11.2(1) / 11.0(2)	14.5(1) / 13.6(2)	16.0(1) / 15.2(2)	11.2(1) / 11.0(2)	14.5(1) / 13.6(2)	16.0(1) / 15.2(2)
Power input	Heating	Nom.		kW	0.870(1) / 1.13(2)	1.27(1) / 1.59(2)	1.66(1) / 2.01(2)	2.43(1) / 3.10(2)	3.37(1) / 4.10(2)	3.76(1) / 4.66(2)	2.43(1) / 3.10(2)	3.37(1) / 4.10(2)	3.76(1) / 4.66(2)
COP					5.04(1) / 3.58(2)	4.74(1) / 3.56(2)	4.45(1) / 3.42(2)	4.60(1) / 3.55(3) / 2.10(4)	4.30(1) / 2.65(2) / 3.32(3) / 2.08(4)	4.25(1) / 2.64(2) / 3.26(3) / 2.09(4)	4.60(1) / 2.75(2) / 3.55(3) / 2.10(4)	4.30(1) / 2.65(2) / 3.32(3) / 2.08(4)	4.25(1) / 2.64(2) / 3.26(3) / 2.09(4)
Space heating	Average climate water outlet 55°C	General	SCOP	%	3.20	3.22	3.20	3.09	3.16	3.06	3.09	3.16	3.06
			Seasonal space heating eff. class		125	126	125	120	123	119	120	123	119
	Average climate water outlet 35°C	General	SCOP	%	4.52	4.29	4.34	3.98	3.90	3.80	3.98	3.90	3.80
			Seasonal space heating eff. class		178	169	171	156	153	149	156	153	149

Indoor Unit				EHBH	04CBV	08CBV	08CBV	11CBV	16CBV	16CBV	11CBV	16CBV	16CBV	
Casing	Colour				White									
	Material				Precoated sheet metal									
Dimensions	Unit	HeightxWidthxDepth	mm	890x480x344										
Weight	Unit	kg			39.0	41.0			42.0		41.0	42.0		
Operation range	Heating	Water side	Min.~Max.	°C	10 ~55.0			10 ~55.0						
	Domestic hot water	Water side	Min.~Max.	°C	25~80									
Sound power level	Nom.	dBA			40.0			41.0	44.0		41.0	44.0		
Sound pressure level	Nom.	dBA			26.0			27.0	30.0		27.0	30.0		

Outdoor Unit				ERLQ-C/ERLQ	004CV3	006CV3	008CV3	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1
Dimensions	Unit	HeightxWidthxDepth	mm	735x832x307				1,345x900x320					
Weight	Unit		kg	54	56			113			114		
Compressor	Quantity			1									
	Type			Hermetically sealed swing compressor				Hermetically sealed scroll compressor					
Operation range	Cooling	Min.~Max.	°CDB	10.0~43.0				10.0~46.0					
	Domestic hot water	Min.~Max.	°CDB	-25 ~35				-20 ~35					
Refrigerant	Type			R-410A									
	GWP			2,087.5									
	Charge		kg	1.5	1.6			3.4					
	Charge		TCO ₂ Eq	3.1	3.3			7.1					
	Control			Expansion valve (electronic type)									
Sound power level	Heating	Nom.	dBA	61			62	64		66	64		66
	Cooling	Nom.	dBA	63				64	66	69	64	66	69
Sound pressure level	Heating	Nom.	dBA	48			49	51		52	51		52
	Cooling	Nom.	dBA	48	49	50			52	54	50	52	54
Power supply	Name/Phase/Frequency/Voltage			V3/1~/50/230							W1/3N~/50/400		
Current	Recommended fuses			16		20	40			20			

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases


Daikin Altherma

low temperature split without back-up heater













Wall mounted **heating only** air to water heat pump
without back-up heater

- › Energy efficient heating only system without back-up heater
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Efficiency data				EHBH + ERHQ-B	11CBV + 011BV3	16CBV + 014BV3	16CBV + 016BV3	11CBV + 011BW1	16CBV + 014BW17	16CBV + 016BW1
Heating capacity	Nom.			kW	11.2(1) / 10.3(2)	14.0(1) / 13.1(2)	16.0(1) / 15.2(2)	11.3(1) / 11.0(2)	14.5(1) / 13.6(2)	16.1(1) / 15.1(2)
Power input	Heating	Nom.		kW	2.55(1) / 3.17(2)	3.26(1) / 4.04(2)	3.92(1) / 4.75(2)	2.63(1) / 3.24(2)	3.42(1) / 4.21(2)	3.82(1) / 4.69(2)
COP					4.39(1) / 3.25(2)	4.29(1) / 3.24(2)	4.08(1) / 3.20(2)	4.30(1) / 3.39(2)	4.24(1) / 3.22(2)	4.20(1) / 3.22(2)
 Space heating	Average climate water outlet 55°C	General	SCOP ηs (Seasonal space heating efficiency) Seasonal space heating eff. class	%	2.86 112	2.82 110	2.92 114	2.90 113	2.86 111	2.96 115
					A+					
	Average climate water outlet 35°C	General	SCOP ηs (Seasonal space heating efficiency) Seasonal space heating eff. class	%	2.99 117	3.23 126	3.29 129	3.08 120	3.34 131	3.33 130
					A+					
					A	A+		A	A+	
Indoor Unit				EHBH	11CBV	16CBV	16CBV	11CBV	16CBV	16CBV
Casing	Colour				White					
	Material				Precoated sheet metal					
Dimensions	Unit	HeightxWidthxDepth	mm		890x480x344					
Weight	Unit		kg		41.0	42.0		41.0	42.0	
Operation range	Heating	Water side	Min.~Max.	°C	10 ~55.0					
	Domestic hot water	Water side	Min.~Max.	°C	25~80					
Sound power level	Nom.			dBA	41.0	44.0		41.0	44.0	
Sound pressure level	Nom.			dBA	27.0	30.0		27.0	30.0	
Outdoor Unit				ERHQ/ERHQ	011BV3	014BV3	016BV3	011BW1	014BW17	016BW1
Dimensions	Unit	HeightxWidthxDepth	mm		1,170x900x320			1,345x900x320		
Weight	Unit		kg		102			108		
Compressor	Quantity				1					
	Type				Hermetically sealed scroll compressor					
Operation range	Cooling	Min.~Max.	°CDB		10.0~46.0					
	Domestic hot water	Min.~Max.	°CDB		-20 ~35					
Refrigerant	Type				R-410A					
	GWP				2,087.5					
	Charge	kg			2.7			3.0	2.95	3.0
	Charge	TCO ₂ Eq			5.6			6.3		
	Control				Expansion valve (electronic type)					
Sound power level	Heating	Nom.	dBA		64		66	64	60	66
	Cooling	Nom.	dBA		64	66	69	64	66	69
Sound pressure level	Heating	Nom.	dBA		49	51	53	51	50	52
	Cooling	Nom.	dBA		50	52	54	50	50	54
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230			W1/3N~/50/400		
Current	Recommended fuses			A	32			20		

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

		Type	Material name	Daikin Altherma R W / F	
				4-8kW	11-16kW
Controls		LAN adapter	BRP069A62	•	•
		LAN adapter + PV solar connection	BRP069A61	•	•
		Remote user interface (DE, FR, NL, IT)	EKRUCBL1	•	•
		Remote user interface (EN, ES, EL, PT)	EKRUCBL3	•	•
		Remote user interface (EN, SV, NO, FI)	EKRUCBL2	•	•
		Remote user interface (EN, TR, PL, RO)	EKRUCBL4	•	•
		Remote user interface (DE, CS, SL, SK)	EKRUCBL5	•	•
		Remote user interface (EN, HR, HU, BG)	EKRUCBL6	•	•
		Remote user interface (EN, DE, RU, DA)	EKRUCBL7	•	•
		Simplified user interface	EKRUCBSB	•	•
		Room thermostat (wired)	EKRTWA	•	•
		Room thermostat (wireless)	EKRTR1	•	•
		Centralised controller kit	EKCC-W	•	•
Adapter		DCOM gateway	DCOM-LT/IO		
		DCOM gateway	DCOM-LT/MB		
Adapter		Demand PCB	EKR1AHTA	•	•
		Digital I/O PCB	EKR1HBAA	•	•
Back-up heater		Back-up heater kit	EKLBUHCB6W1		•
		Booster heater for tank integrated design	EKBSHCA3V3		•
		Bottom plate heater	EKBPTH16A		•
Drain		Drain kit	EKDK04	•	•
		Drain pan for indoor wall munted	EKHBDPCA2	•	•
		Drain pan for outdoor (excl heater)	EKDP008CA	•	
		Drain pan heater	EKDPH008CA	•	
Filter		Magnetic filter without additives	K.FERNOXTF1	•	•
		Magnetic filter with additive (500ml inhibitor fluid F1)	K.FERNOXTF1FL	•	•
Installation		Bi-Zone kit	BZKA7V3	•	•
		Snowcover	EK016SNCA		•
		U-beams for outdoor	EKFT008CA	•	
		UK tank kit	EKVSU260A		•
Sensor		Remote indoor sensor	KRCS01-1B	•	•
		Remote sensor for outdoor	EKRSCA1	•	
		External sensor	EKRTETS	•	•
Others		PC cable	EKPCCAB1	•	•
		Low sound cover for ERLQ-CV3	EKLN-A	•	





Daikin Altherma M

The reversible air-to-water heat pump monobloc system is the ideal system for users that have limited installation space inside. Delivering cutting-edge performance within the market's most compact monobloc outdoor unit, Daikin Altherma low temperature monobloc offers heating and cooling, with an optional connection to provide domestic hot water

A simple solution

The monobloc system combines all the features of heating and cooling (with optional domestic hot water) into one unit

- › Quiet and space-saving design that's easy to commission and install
- › All hydraulic components are combined into one outdoor unit
- › Reliable operation is guaranteed, even with outdoor temperatures as low as -25°C
- › Combine with an **ECH₂O** thermal store to provide thermal support
- › Combine with a stainless steel tank for domestic hot water

High performance

- › Improved seasonal efficiency ErP label up to A++
- › High capacity at low ambient temperatures
- › Connection to new stainless steel DHW tank (EKHWS(U)-D) with improved energy efficiency label B

Easy installation

- › Sealed refrigerant means there is no need for refrigerant handling or F-gas qualifications
- › Key hydraulic parts reduce the risk of installation errors and need for external parts such as expansion vessel, pump or isolation valves
- › Fewer components lower the installation time and help maximise profits on the job

Year-round reliability

- › Delivers higher heating capacity at low ambient temperatures
- › Flow temperatures up to 55°C, perfect for new build applications using UFH
- › Reliable operation is guaranteed, even with outdoor temperatures as low as -25°C
- › Equipped with optional backup heater

Easy connection

- › The LAN adapter allows to control the unit via the heating app

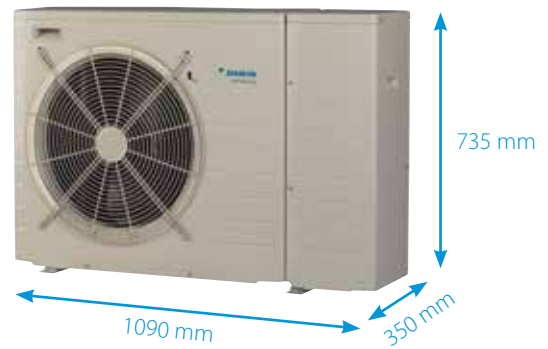


Daikin Altherma M, 5-7 kW

A⁺⁺

55°C

- › Back-up heater less models
- › Separate indoor wiring centre (control box)
- › Separate back-up heater kit



Heat pumps

Daikin Altherma M, 11-16 kW

A⁺⁺

55°C

- › Smaller casing
- › Back-up heater less models and models with 3V integrated back-up heater for maximum installation flexibility
- › 1 ph and 3 ph models
- › Reversible and heating only models
- › LAN Adapter connection
- › A⁺⁺ heating energy label (from G to A⁺⁺)



*-36% compared to current monobloc

Daikin Altherma

low temperature monobloc

Reversible air to water monobloc system, ideal when indoor space is limited

- › Compact reversible monobloc for space heating & cooling with optional domestic hot water
- › Compact heating only monobloc for space heating with optional domestic hot water
- › Fuss-free installation : only water connections required
- › Reliable operation even when -25°C outside thanks to frost protection features such as free hanging coil
- › COP up to 5



E(D/B)LQ-CV3



011-1W0079
011-1W0080



A++



R-410A

Single Unit				EBLQ/EDLQ	05CV3	07CV3	05CV3	07CV3
Space heating	Average climate water outlet 55°C	General	ηs (Seasonal space heating efficiency)	%	125			
			SCOP		3.20	3.22	3.20	3.22
			Seasonal space heating eff. class		A++			
			ηs (Seasonal space heating efficiency)	%	172	163	172	163
Space heating	Average climate water outlet 35°C	General	SCOP		4.39	4.14	4.39	4.14
			Seasonal space heating eff. class		A++			
			ηs (Seasonal space heating efficiency)	%	172	163	172	163
			SCOP		4.39	4.14	4.39	4.14
Heating capacity	Nom.			kW	4.40(1) / 4.03(2)	7.00(1) / 6.90(2)	4.40(1) / 4.03(2)	7.00(1) / 6.90(2)
Cooling capacity	Nom.			kW	3.88(1) / 3.99(2)	5.20(1) / 5.15(2)	-	-
Power input	Cooling	Nom.		kW	0.950(1) / 1.93(2)	1.37(1) / 2.69(2)	-	-
	Heating	Nom.		kW	0.880(1) / 1.13(2)	1.55(1) / 2.45(2)	0.880(1) / 1.13(2)	1.55(1) / 2.02(2)
COP					5.00(1) / 3.58(2)	4.52(1) / 3.42(2)	5.00(1) / 3.58(2)	4.52(1) / 3.42(2)
EER					4.07(1) / 2.07(2)	3.80(1) / 2.10(2)	-	-
Dimensions	Unit	HeightxWidthxDepth		mm	735x1,090x350			
Weight	Unit			kg	76.0	80.0	76.0	80.0
Operation range	Heating	Water side	Min.~Max.	°C	15 ~55.0			
	Cooling	Ambient	Min.~Max.	°CDB	10.0~43.0			
		Water side	Min.~Max.	°C	5.00 ~22.0			
	Domestic hot water	Ambient	Min.~Max.	°CDB	-25.0 ~35.0			
Refrigerant	Water side	Min.~Max.	°C		25~80			
	Type				R-410A			
	GWP				2,088			
	Charge			kg	1.30	1.45	1.30	1.45
Sound power level	Charge			TCO ₂ Eq	2.714	3.027	2.714	3.027
	Control				Expansion valve (electronic type)			
	Heating	Nom.		dBA	61	62	61	62
	Cooling	Nom.		dBA	63.0			
Sound pressure level	Heating	Nom.		dBA	48	49	48	49
	Cooling	Nom.		dBA	48	50	-	-

Wiring centre				EKCB07CV3	EK2CB07CV3
Casing	Colour			White	
	Material			Precoated sheet metal	
Dimensions	Unit	HeightxWidthxDepth	mm	360x340x97.0	
Weight	Unit		kg	4.00	

Back-up heater kit				EKMBUHC3V3	EKMBUHC9W1
Casing	Colour			White	
	Material			Precoated sheet metal	
Dimensions	Unit	HeightxWidthxDepth	mm	560x250x210	
Weight	Unit		kg	11.0	13.0

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) Contains fluorinated greenhouse gases

Daikin Altherma

low temperature


monobloc

without back-up heater

Reversible air to water monobloc system, ideal when indoor space is limited

- › Monobloc all-in-one concept including hydraulic parts
- › Separate indoor wiring center (control box)
- › LAN Adapter connection
- › Possible to combine with domestic hot water
- › Energy efficient heating only system based on air-to-water heat pump technology
- › A++ heating energy label (from G to A++)



Single Unit				EBLQ/EDLQ	011CV3	014CV3	016CV3	011CW1	014CW1	016CW1
	Space heating	Average climate water outlet 55°C	General	η _s (Seasonal space heating efficiency)	120	123	119	120	123	119
				SCOP	3.09	3.16	3.06	3.09	3.16	3.06
	Average climate water outlet 35°C	General	Seasonal space heating eff. class	A+						
			η _s (Seasonal space heating efficiency)	156	153	149	156	153	149	
			SCOP	3.98	3.90	3.80	3.98	3.90	3.80	
Seasonal space heating eff. class				A++		A+	A++		A+	
Heating capacity	Nom.			kW	11.2 (1) / 11.0 (2)	14.5 (1) / 13.6 (2)	16.0 (1) / 15.2 (2)	11.2 (1) / 11.0 (2)	14.5 (1) / 13.6 (2)	16.0 (1) / 15.2 (2)
Cooling capacity (only applicable to EBLQ)	Nom.			kW	12.4 (1) / 11.6 (2)	12.8 (1) / 12.6 (2)	13.9 (1) / 13.6 (2)	12.4 (1) / 11.6 (2)	12.8 (1) / 12.6 (2)	13.9 (1) / 13.6 (2)
Power input	Cooling	Nom.		kW	3.18 (1) / 5.09 (2)	3.16 (1) / 5.14 (2)	3.56 (1) / 5.96 (2)	3.18 (1) / 5.09 (2)	3.16 (1) / 5.14 (2)	3.56 (1) / 5.96 (2)
	Heating	Nom.		kW	2.43 (1) / 3.10 (2)	3.37 (1) / 4.10 (2)	3.76 (1) / 4.66 (2)	2.43 (1) / 3.10 (2)	3.37 (1) / 4.10 (2)	3.76 (1) / 4.66 (2)
COP					4.61 (1) / 3.55 (2)	4.30 (1) / 3.32 (2)	4.26 (1) / 3.26 (2)	4.61 (1) / 3.55 (2)	4.30 (1) / 3.32 (2)	4.26 (1) / 3.26 (2)
EER (only applicable to EBLQ)					3.90 (1) / 2.28 (2)	4.05 (1) / 2.45 (2)	3.90 (1) / 2.28 (2)	3.90 (1) / 2.28 (2)	4.05 (1) / 2.45 (2)	3.90 (1) / 2.28 (2)
SEER (only applicable to EBLQ)					3.85	3.89	3.90	3.85	3.89	3.90
Dimensions	Unit	HeightxWidthxDepth			mm					
Weight	Unit				kg					
Operation range (3) Heating	Ambient	Min.~Max.	°CWB	151						
				-25~35						
Operation range (3) Cooling (only applicable to EBLQ)	Ambient	Min.~Max.	°CDB	154						
				25~55						
Operation range (3) Domestic hot water	Ambient	Min.~Max.	°CDB	10~46						
				5~22						
Operation range (3) Refrigerant	Ambient	Min.~Max.	°CDB	-25~35						
				25~80						
Refrigerant	Type				R-410A					
	GWP				2087.5					
	Charge				3.40					
	Charge	TCO ₂ /Eq			7.10					
	Control				Expansion valve (electronic type)					
Sound power level	Heating	Nom.	dBA	64			66	64		66
	Cooling	Nom.	dBA	64	66	69	64	66	69	
Sound pressure level	Heating	Nom.	dBA	51			52	51		52
	Cooling	Nom.	dBA	50	52	54	50	52	54	

Wiring centre				EKCB07CV3	EK2CB07CV3
Casing	Colour				
	Material				
Dimensions	Unit	HeightxWidthxDepth			mm
Weight	Unit				kg

Back-up heater kit				EKMBUHC3V3	EKMBUHC9W1
Casing	Colour				
	Material				
Dimensions	Unit	HeightxWidthxDepth			mm
Weight	Unit				kg

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) Including back-up heater and/or booster heater, see details in databook.


Daikin Altherma

low temperature monobloc with integrated back-up heater

Reversible air to water monobloc system, ideal when indoor space is limited











- › Monobloc all-in-one concept including hydraulic parts
- › Separate indoor wiring center (control box)
- › LAN Adapter connection
- › Possible to combine with domestic hot water
- › Energy efficient heating only system based on air-to-water heat pump technology
- › A++ heating energy label (from G to A++)



Single Unit				EBLQ/EDLQ	011C3V3	014C3V3	016C3V3	011C3W1	014C3W1	016C3W1	
	Space heating	Average climate water outlet 55°C	General	ηs (Seasonal space heating efficiency)	120	123	119	120	123	119	
				SCOP	3.09	3.16	3.06	3.09	3.16	3.06	
				Seasonal space heating eff. class	A+						
	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	156	153	149	156	153	149		
			SCOP	3.98	3.90	3.80	3.98	3.90	3.80		
			Seasonal space heating eff. class	A++		A+	A++		A+		
Heating capacity	Nom.		kW	11.2 (1) / 11.0 (2)	14.5 (1) / 13.6 (2)	16.0 (1) / 15.2 (2)	11.2 (1) / 11.0 (2)	14.5 (1) / 13.6 (2)	16.0 (1) / 15.2 (2)		
Cooling capacity (only applicable to EBLQ)	Nom.		kW	12.4 (1) / 11.6 (2)	12.8 (1) / 12.6 (2)	13.9 (1) / 13.6 (2)	12.4 (1) / 11.6 (2)	12.8 (1) / 12.6 (2)	13.9 (1) / 13.6 (2)		
Power input	Cooling	Nom.	kW	3.18 (1) / 5.09 (2)	3.16 (1) / 5.14 (2)	3.56 (1) / 5.96 (2)	3.18 (1) / 5.09 (2)	3.16 (1) / 5.14 (2)	3.56 (1) / 5.96 (2)		
	Heating	Nom.	kW	2.43 (1) / 3.10 (2)	3.37 (1) / 4.10 (2)	3.76 (1) / 4.66 (2)	2.43 (1) / 3.10 (2)	3.37 (1) / 4.10 (2)	3.76 (1) / 4.66 (2)		
COP					4.61 (1) / 3.55 (2)	4.30 (1) / 3.32 (2)	4.26 (1) / 3.26 (2)	4.61 (1) / 3.55 (2)	4.30 (1) / 3.32 (2)	4.26 (1) / 3.26 (2)	
EER (only applicable to EBLQ)					3.90 (1) / 2.28 (2)	4.05 (1) / 2.45 (2)	3.90 (1) / 2.28 (2)	3.90 (1) / 2.28 (2)	4.05 (1) / 2.45 (2)	3.90 (1) / 2.28 (2)	
SEER (only applicable to EBLQ)					3.85	3.89	3.90	3.85	3.89	3.90	
Dimensions	Unit	HeightxWidthxDepth		mm	1,348x1,160x380						
Weight	Unit			kg	157						
Operation range (3)	Heating	Ambient	Min.~Max.	°CWB	-25~35						
			Water side	Min.~Max.	°C	25~55					
Operation range (3) (only applicable to EBLQ)	Cooling	Ambient	Min.~Max.	°CDB	10~46						
			Water side	Min.~Max.	°C	5~22					
Operation range (3)	Domestic hot water	Ambient	Min.~Max.	°CDB	-25~35						
			Water side	Min.~Max.	°C	25~80					
Refrigerant	Type				R-410A						
	GWP				2087.5						
	Charge			kg	3.40						
	Charge			TCO ₂ Eq	7.10						
	Control				Expansion valve (electronic type)						
Sound power level	Heating	Nom.		dBA	64		66	64		66	
	Cooling	Nom.		dBA	64	66	69	64	66	69	
Sound pressure level	Heating	Nom.		dBA	51		52	51		52	
	Cooling	Nom.		dBA	50	52	54	50	52	54	

Wiring centre				EKCB07CV3	EK2CB07CV3
Casing	Colour	White			
	Material	Precoated sheet metal			
Dimensions	Unit	HeightxWidthxDepth	mm	360x340x97.0	
Weight	Unit		kg	4.00	

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) Including back-up heater and/or booster heater, see details in databook.

	Illustration	Type	Material name	Daikin Altherma M		
				5-7 kW	11-16 kW BUH-less	11-16 kW with 3V BUH
Controls		LAN adapter	BRP069A62	•	•	•
		LAN adapter + PV solar connection	BRP069A61	•	•	•
		Remote user interface (DE, FR, NL, IT)	EKRUCBL1	•	•	•
		Remote user interface (EN, ES, EL, PT)	EKRUCBL3	•	•	•
		Remote user interface (EN, SV, NO, FI)	EKRUCBL2	•	•	•
		Remote user interface (EN, TR, PL, RO)	EKRUCBL4	•	•	•
		Remote user interface (DE, CS, SL, SK)	EKRUCBL5	•	•	•
		Remote user interface (EN, HR, HU, BG)	EKRUCBL6	•	•	•
		Remote user interface (EN, DE, RU, DA)	EKRUCBL7	•	•	•
		Simplified user interface	EKRUCBSB	•	•	•
		Room thermostat (wired)	EKRTWA	•	•	•
		Room thermostat (wireless)	EKRTR1	•	•	•
		DCOM gateway	DCOM-LT/IO			
		DCOM gateway	DCOM-LT/MB			
Adapter		Digital I/O PCB	EKRPIHBAA		•	
Back-up heater		Back-up heater monobloc	EKMBUHC3V3/C9W1	•	•	
		Bottom plate heater	EKBPTH16A		•	
Drain		Drain kit	EKDK04		•	
Sensor		Remote sensor for OU	EKRSCA1	•	•	•
		External sensor	EKRTETS	•	•	•
		Remote sensor for IU	KRCS01-1	•	•	•
Wiring centre		Control box	EKCB07CAV3	•	•	•
		Option box	EK2CB07CAV3	•	•	•
By pass		Valve kit	EKMBHBP1	•	•	•
Bi-Zone		Bi-Zone kit	BZKA7V3	•	•	•
Others		Cable	EKPCCAB3	•		

Daikin Altherma R HT

Why choose a Daikin Altherma high temperature split

The Daikin Altherma high temperature split is the perfect heating solution to upgrade an old heating and hot water system to achieve more cost savings and energy efficiency, without replacing the existing piping and radiators

✓ Comfort

Best for renovation projects

Air-to-water high temperature heat pumps are ideal for renovations and replacing old boilers. Daikin Altherma high temperature split's compact design requires minimal installation space and integrates seamlessly with your existing piping and radiators. Minimal installation ensures you can enjoy the energy efficiency of a heat pump without having to replace your entire system.

- › Easy replacement: reuse existing piping/radiators
- › Reduced installation time
- › Limited installation space needed as the indoor unit and domestic hot water tank can be stacked together
- › No need to change existing radiators and piping as water temperatures can be increased up to 80°C for heating and domestic hot water use



Whether your customer wants only domestic hot water or the advantage of solar energy, Daikin offers a wide range of options, including:

Stainless steel domestic hot water tank

The domestic hot water tank can be stacked on top of the indoor unit to save space, or installed next to each other if space is available.

- › Available in 200 or 250 litres
- › Efficient temperature heating: from 10°C – 50°C in only 60 minutes*

*Test completed with a 16 kW outdoor unit at ambient temperature of 7°C for a 200 litre tank



ECH₂O thermal store: hot water savings with solar energy

Combine the Daikin Altherma heat pump with a thermal store to reduce energy costs by taking advantage of the sun's renewable energy. Built for small and large homes, customers can choose from a pressureless or pressurised hot water system.



✓ Energy efficiency

Powered by renewable energy

Powered by **65% renewable energy** extracted from the air and 35% electricity, our Daikin Altherma high temperature heat pump provides heating and hot water with A+ energy efficiency.

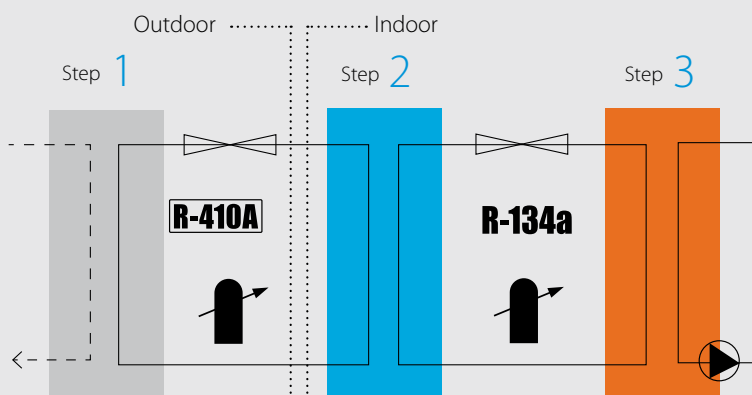
✓ Reliability

The Daikin Altherma high temperature split optimises its technology to deliver reliable year-round comfort, even in the most extreme climates.

- › 11-15 kW capacities
- › Low running costs and optimum comfort at even the coldest outdoor temperatures, thanks to the unique cascade compressor approach
- › Works with existing high temperature radiators up to 80°C without an additional backup heater

Cascade technology

High performance heating in 3 steps to achieve 80°C water temperature without using an additional backup heater



- 1 The outdoor unit** extracts heat from the ambient outdoor air. This heat is transferred to the indoor unit via R-410A refrigerant
- 2 The indoor unit** increases the temperature with R-134a refrigerant
- 3 The refrigerant circuit** transfers the heat to the water in the system

Daikin Altherma high temperature split


Floor standing heating only air to water heat pump
combinable with existing radiators

- › Energy efficient heating only system based on air to water heat pump technology
- › Single phase floor standing indoor unit up to 16kW
- › Three phase floor standing indoor unit up to 16kW
- › High temperature application: up to 80°C without electric heater
- › Easy replacement of existing boiler, without changing heating pipes
- › Combinable with high temperature radiators
- › Low energy bills and low CO₂ emissions
- › Inverter controlled scroll compressor









011-1W0256 → 258



Efficiency data				EKHBRD + ERRQ/ERSQ	011ADV17 + ERRQ011AV1	011ADV17 + ERSQ011AV1	014ADV17 + ERRQ014AV1	014ADV17 + ERSQ014AV1	016ADV17 + ER(R/S) Q016AV1	011ADY17 + ERRQ011AY1	011ADY17 + ERSQ011AY1	014ADY17 + ERRQ014AY1	014ADY17 + ERSQ014AY1	016ADY17 + ER(R/S) Q016AY1	
Heating capacity	Nom.			kW	11.3 (1) / 11.0 (2) / 11.2 (3)		14.5 (1) / 14.0 (2) / 14.4 (3)		16.0 (1) / 16.0 (2) / 16.0 (3)	11.3 (1) / 11.0 (2) / 11.2 (3)		14.5 (1) / 14.0 (2) / 14.4 (3)		16.0 (1) / 16.0 (2) / 16.0 (3)	
Power input	Heating	Nom.		kW	3.80 (1) / 4.40 (2) / 2.67 (3)	3.87 (1) / 4.40 (2) / 2.67 (3)	5.02 (1) / 5.65 (2) / 3.87 (3)	5.09 (1) / 5.65 (2) / 3.87 (3)	5.86 (1) / 6.65 (2) / 4.31 (3)	3.80 (1) / 4.40 (2) / 2.67 (3)	3.87 (1) / 4.40 (2) / 2.67 (3)	5.02 (1) / 5.65 (2) / 3.87 (3)	5.09 (1) / 5.65 (2) / 3.87 (3)	5.86 (1) / 6.65 (2) / 4.31 (3)	
COP					2.97 (1) / 2.50 (2) / 4.20 (3)	2.92 (1) / 2.50 (2) / 4.20 (3)	2.89 (1) / 2.48 (2) / 3.72 (3)	2.85 (1) / 2.48 (2) / 3.72 (3)	2.73 (1) / 2.41 (2) / 3.72 (3)	2.97 (1) / 2.50 (2) / 4.20 (3)	2.92 (1) / 2.50 (2) / 4.20 (3)	2.89 (1) / 2.48 (2) / 3.72 (3)	2.85 (1) / 2.48 (2) / 3.72 (3)	2.73 (1) / 2.41 (2) / 3.72 (3)	
 Space heating	Average climate water outlet 55°C	General	SCOP ηs (Seasonal space heating efficiency) Seasonal space heating eff. class	%	2.96 115		2.98 116		3.01 117	2.96 115		2.98 116		3.01 117	
					A+										
	Average climate water outlet 35°C	General	SCOP ηs (Seasonal space heating efficiency) Seasonal space heating eff. class	%	2.70 105		2.81 110		2.88 112	2.70 105		2.81 110		2.88 112	
						C		B		C		B			
Indoor Unit				EKHBRD	011ADV17		014ADV17		016ADV17	011ADY17		014ADY17		016ADY17	
Casing	Colour				Metallic grey										
	Material				Precoated sheet metal										
Dimensions	Unit	HeightxWidthxDepth	mm	705x600x695											
Weight	Unit				kg	144					147				
Operation range	Heating	Ambient	Min.~Max.	°C	-20.0 / 0.00 ~20										
		Water side	Min.~Max.	°C	25~80.0										
	Domestic hot water	Ambient	Min.~Max.	°CDB	-20.0 ~35.0										
		Water side	Min.~Max.	°C	25~80										
Refrigerant	Type				R-134a										
	Charge				kg	2.60									
Sound pressure level	Nom.				dBA	43.0 / 46.0 / 0.00 / 0.00	45.0 / 46.0 / 0.00 / 0.00	46.0 / 46.0 / 0.00 / 0.00	46.0 / 46.0 / 0.00 / 0.00	43.0 / 46.0 / 0.00 / 0.00	45.0 / 46.0 / 0.00 / 0.00	46.0 / 46.0 / 0.00 / 0.00	43.0 / 46.0 / 0.00 / 0.00	46.0 / 46.0 / 0.00 / 0.00	
	Night quiet mode	Level 1				dBA	40.0 / 0.00 / 0.00	43.0 / 0.00 / 0.00	45.0 / 0.00 / 0.00	45.0 / 0.00 / 0.00	40.0 / 0.00 / 0.00	43.0 / 0.00 / 0.00	45.0 / 0.00 / 0.00	45.0 / 0.00 / 0.00	45.0 / 0.00 / 0.00
Outdoor Unit					ERRQ-011AV1	ERSQ-011AV1	ERRQ-014AV1	ERSQ-014AV1	ERRQ/ERSQ 016AV1	ERRQ-011AY1	ERSQ-011AY1	ERRQ-014AY1	ERSQ-014AY1	ERRQ/ERSQ 016AY1	
Dimensions	Unit	HeightxWidthxDepth	mm	1,345x900x320											
Weight	Unit				kg	120									
Compressor	Quantity				1										
	Type				Hermetically sealed scroll compressor										
Operation range	Heating	Min.~Max.	°CWB	-20~20											
	Domestic hot water	Min.~Max.	°CDB	-20~35											
Refrigerant	Type				R-410A										
	GWP				2,087.5										
	Charge				kg	4.5									
	Charge				TCO2/Eq	9.4									
	Control				Expansion valve (electronic type)										
Sound power level	Heating	Nom.	dBA	68	69	71	71	68	69	71	68	69	71		
Sound pressure level	Heating	Nom.	dBA	52	53	55	55	52	53	55	52	53	55		
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V1/1~/50/220-440					Y1/3~/50/380-415					
Current	Recommended fuses			A	25					16					

(1)EW 55°C; LW 65°C; Dt 10°C; ambient conditions: 7°CDB/6°CWB | (2)EW 70°C; LW 80°C; Dt 10°C; ambient conditions: 7°CDB/6°CWB | (3)EW 30°C; LW 35°C; Dt 5°C; ambient conditions: 7°CDB/6°CWB | Contains fluorinated greenhouse gases

	Type	Material name
Controls	Remote user interface	EKRUHTB
	 Room thermostat (wired)	EKRTWA
	 Room thermostat (wireless)	EKRTR1
	Centralised controller kit	EKCC-W
	 DCOM gateway	DCOM-LT/IO
	 DCOM gateway	DCOM-LT/MB
Adapter	 Demand PCB	EKRP1AHTA
	 Digital I/O PCB	EKRP1HBAA
Back-up heater	Back-up heater for HT 1~	EKBUHAA6V3
	Back-up heater for HT 3~	EKBUHAA6W1
	Bottom plate heater	EKBPTH16A
Installation	UK tank kit	EKUHWHTA
	Stand alone kit	EKFMAHTB
Sensor	External sensor	EKRTETS
Valve	Refrigerant stop valves	EKRSVHTA
Others	Compatibility kit 1	EKMKHT1A
	Compatibility kit 2	EKMKHT2A



Daikin Altherma M HW



Why choose a monobloc domestic hot water heat pump ?

The high performance monobloc domestic hot water heat pump is the newest addition to the Daikin water heater range. Enhanced hot water comfort with quiet operation, easy handling, flexibility of installation and different integration possibilities. Perfect for renovation and new build.

✓ High performance

- › Delivering high comfort hot water of temperatures up to 55 °C with the heat pump only
- › Among the most quiet with 53 dBA sound power and 36 dBA at 2meters
- › High tapping rate L, XL for guaranteeing maximum domestic hot water flow
- › A+ seasonal energy efficiency

✓ Easy to install and control

- › All components are built-in and ready to work
- › Compact sizes and low weight, which make it easily manoeuvrable through small doors and spaces
- › Easy connection, from top of the unit, maximizes placing possibilities
- › 3 easy operating modes, Eco – Auto – Boost, for your personal preferences

✓ Renewable power

- › Produces domestic hot water by extracting energy from the outside air
- › For the 260liter an extra coil possibility exists for solar water heating
- › The monobloc can be standard connected to a PV installation severely minimizing running costs

✓ Year-round reliability

- › Total thermal power up to 3.4 kW ensures optimal hot water comfort
- › Wide operation range: down to -7 °C outside temperature with the heat pump unit, and below -7°C with electrical heating element support
- › Guaranteed optimal comfort by heat pump up to 38 °C outside temperature



Domestic hot water heat pump

Enhanced hot water comfort

- › Quiet operation: with 36dBA at 2m, one of the most silent products in its kind
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › Enhanced comfort: the 3 operating modes will give an answer to all your needs
- › Solar connectivity: empower your house with renewable energy
- › Wide operation range: down to -7 °C outside temperature with the heat pump, below -7 °C electrical heating element support



EKHH2E-AV3



011-1W0215 → 217

A⁺

56°C

Indoor unit				EKHH2E	2E200AV3(3)	2E260AV3(3)	2E260PAV3(3)
Heat up time	Max.			hh:mm	08:17:00 (3) / 06:30:44 (4)	10:14:00 (3) / 07:56:46 (4)	10:14:00 (3) / 07:46:46 (4)
COP					2.94 (1) / 3.30 (2)	3.10 (1) / 3.60 (2)	
Domestic hot water	Output	Nom		kW	1.8		
Equivalent hot water	Max			l	275	342	
Dimensions	Unit	Height	mm	1,714	2,004		
		Diameter	mm	650			
Weight	Unit	Empty	kg	83	95	112	
		Full	kg	282	349	358	
	Packed unit		kg	100	120	140	
Installation place					Indoor		
IP class					IP-X4		
Compressor	Type				Rotary non-inverter		
Refrigerant	Type				R-134a		
	GWP				1,430.0		
	Charge			TCO ₂ Eq	1.287		
Heat pump	Casing	Colour			White body / Black top		
		Material			Cover: EPP top finishing		
	Defrost method				Active with hot gas valve		
	Automatic defrost start			°C	-2		
	System pressure	Max.	bar	7			
	Operation Ambient	Min.	°CDB	-7			
	range	Max.	°CDB	38			
Tank	Integrated heating element power	Nom.	kW	1.5			
	Casing	Colour		White			
		Material		Embossed ABS			
	Dimensions	Unit	Height	mm	1,210	1,500	
	Operation range	Water side	Min.	°C	10		
			Max.	°C	56		
	Installation	Solar thermal connection possible			-		1
	Standing heat loss			W	60	70	71
Domestic hot water heating	General	Declared load profile		L	XL		
		Water heating energy efficiency class		A+			
		Thermostat temperature setting		°C	55		
	Average climate	AEC (Annual electricity consumption)	kWh	835	1,323		
		η _{wh} (water heating efficiency)	%	123	127		
	Cold climate	AEC (Annual electricity consumption)	kWh	1,091	1,826		
		η _{wh} (water heating efficiency)	%	94	92		
	Warm climate	AEC (Annual electricity consumption)	kWh	756	1,296		
η _{wh} (water heating efficiency)		%	135	129			
Sound power level	Domestic hot water heating	Indoor unit		dBA	53		
Heat pump	Power supply	Phase			1P		
		Frequency		Hz	50		
		Voltage		V	230		
		Maximum running current		A	2.4		
Tank	Power supply	Phase			1P		
		Frequency		Hz	50		
		Voltage		V	230		

(1) Temperature of incoming air supply = 7°C, temperature of boiler storage environment = 20°C, water heated from 10°C to 55°C (according to UNI EN 16147-2011).

(2) Temperature of incoming air supply = 15°C, temperature of boiler storage environment = 20°C, water heated from 10°C to 55°C (according to UNI EN 1614 7-2011).

(3) Indoor temperature : 27°CDB, 19°CWB; outdoor temperature : 46°CDB, 24°CWB

(4) Indoor temperature : 27°CDB, 19°CWB; outdoor temperature : 35°CDB, 24°CWB

Daikin Altherma R HW

Why choose a split domestic hot water heat pump ?

The split domestic hot water heat pump is the ideal replacement for an electric domestic hot water tank to provide semi-instantaneous hot water.

✓ Comfort

Fresh water principle:

- › Domestic hot water production on demand means fresh water at all times
- › Minimum volume of stored domestic hot water prevents the risk of contamination and sedimentation

Easy installation

- › No water tank pressure and limited pressure in the heat exchanger
- › Low maintenance: no anode means no scale and lime deposits or corrosion
- › Compact and designed with additional controls for easy installation and maintenance

✓ Reliability

- › Electrical backup (2.5 kW) ensures hot water under all circumstances; the 500l tank can also be equipped with an external hydraulic backup
- › The ECH₂O thermal store is engineered to provide you with fresh, healthy and safe hot water
- › By just using the heat pump, the temperature of the water can reach up to 55°C and its production is guaranteed down to -15°C

✓ Energy efficiency

- › Heat pump extracts renewable energy from the outside air to produce hot water
- › Increase energy saving and efficiency by connecting the unit to solar panels



Polypropylene casing, resistant to corrosion and shocks

Stainless steel heat exchanger for hot water production

Polyurethane insulation of 5 cm to 8 cm

Domestic hot water heat pump

Hot water in an efficient way


- › Domestic hot water is heated almost immediately
- › Combine it with solar heating for even better energy efficiency
- › Easy installation: no water tank pressure and only limited pressure in the heat exchanger
- › Low maintenance: no anode means no scale and lime deposits or corrosion
- › Electrical back-up (2.5 kW) ensures hot water under all circumstances. The 500L tank can also be equipped with an external hydraulic back-up.
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



A

55°C

R-410A

Efficiency data				EKHHP + ERWQ	300A2V3 + 02AV3	500A2V3 + 02AV3
 Domestic hot water heating	General	Declared load profile			L	XL
	Average climate	η _{wh} (water heating efficiency) %			119	123
		Water heating energy efficiency class			A	
	COP				4.30 (1)	
Indoor Unit				EKHHP	300A2V3	500A2V3
Casing	Colour			Traffic white (RAL9016) / Dark grey (RAL7011)		
Dimensions	Unit	HeightxWidthxDepth		mm	1,750x615x615	1,750x790x790
Weight	Unit			kg	70	80
Tank	Water volume			l	294	477
	Maximum water temperature			°C	85	
Operation range	Domestic hot water	Ambient	Min.~Max.	°CDB	2~35	
		Water side	Min.~Max.	°C	5~55	
Refrigerant	Type			R-410A		
Outdoor Unit				ERWQ	02AV3	02AV3
Dimensions	Unit	HeightxWidthxDepth		mm	550x765x285	
Weight	Unit			kg	35	
Compressor	Quantity				1	
	Type				Hermetically sealed swing compressor	
Operation range	Domestic hot water		Min.~Max.	°CDB	-15~35	
Refrigerant	Type				R-410A	
	GWP				2,087.5	
	Charge			kg	1.05	
	Charge			TCO ₂ Eq	2.2	
Sound pressure level	Heating	Nom.		dBA	47	
	Cooling	Nom.		dBA	47	
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230	

(1) At 7°C ambient temperature (2) Contains fluorinated greenhouse gases



Daikin Altherma R Flex Type HT HW



Why choose a Daikin Altherma HT Flex Type

Daikin Altherma HT Flex Type is ideal for large requirements of domestic hot water like apartment buildings or commercial spaces.

✓ Comfort

Domestic hot water

- › Equipped with air-to-water heat pump technology
- › Best system to meet high demands for hot water
- › Using renewable energy from the heat pump, the system can heat the hot water tank up to 75°C without using an electric heater

✓ Energy efficiency

- › High energy efficiency achieves high sustainability and low operation costs
- › Inverter compressor continuously adjusts the compressor speed to meet actual demand. Fewer power-consuming starts and stops result in decreased energy consumption (up to 30%) and more stable temperatures

✓ Reliability

Modular system

One or more outdoor units can be connected to several indoor units (maximum 10 indoor units per outdoor unit)



Daikin Altherma High Temperature Flex Type


- › Low energy bills and low CO₂ emissions
- › Easy installation and maintenance
- › Customised to meet your building's needs: up to 10 indoor units can be connected to 1 outdoor unit



A



R-410A

Outdoor Unit					EMRQ	8AB	10AB	12AB	14AB	16AB
Heating capacity	Nom.				kW	22.4 (1)	28 (1)	33.6 (1)	39.2 (1)	44.8 (1)
 Seasonal efficiency	Domestic hot water heating	General	Declared load profile			XL				
		Average	η _{wh}	%	93	83.7	93			
		climate	(water heating efficiency)							
		Water heating energy efficiency class								
Casing	Colour					Daikin White				
	Material					Painted galvanized steel plate				
Dimensions	Unit	HeightxWidthxDepth		mm	1,680x1,300x765					
Weight	Unit			kg	331			339		
Operation range	Domestic hot water	Ambient	Min.~Max.	°CDB	-20~35					
Refrigerant	Type					R-410A				
	GWP					2,087.5				
	Charge					10.3	10.6	10.8	11.1	
Piping connections	Liquid	OD			mm	9.52		22.5	23.2	
		Suction	OD			mm	19.1	22.2	28.6	
	High and low pressure gas	OD			mm	15.9	19.1		22.2	
	Piping length	OU - IU	Max.	m	100					
		System	Equivalent	m	120					
	Total piping length	System	Actual	m	300					
	Sound power level	Heating	Nom.			dBA	78		80	83
Sound pressure level	Heating	Nom.			dBA	58		60	62	63
Power supply	Phase/Voltage				V	3~/380-415				
Current	Recommended fuses				A	20	25		40	

(1) Condition: Ta=7°CDB/6°CWB, 100% connection ratio
(2) Contains fluorinated greenhouse gases

Indoor Unit				EKHBRD	011ADV17	014ADV17	016ADV17	011ADY17	014ADY17	016ADY17	
Casing	Colour				Metallic grey						
	Material				Precoated sheet metal						
Dimensions	Unit	HeightxWidthxDepth		mm	705x600x695						
Weight	Unit			kg	144			147			
Operation range	Domestic hot water	Ambient	Min.~Max.	°CDB	-20.0~35.0						
		Water side	Min.~Max.	°C	25~80						
Refrigerant	Type				R-134a						
	Charge				2.60						
		TCO ₂ eq			3.718						
		GWP				1,430					
Sound pressure level	Nom.				dBA	43.0 / 46.0 / 0.00 / 0.00	45.0 / 46.0 / 0.00 / 0.00	46.0 / 46.0 / 0.00 / 0.00	43.0 / 46.0 / 0.00 / 0.00	45.0 / 46.0 / 0.00 / 0.00	46.0 / 46.0 / 0.00 / 0.00
	Night quiet mode	Level 1		dBA	40 / 0 / 0	43 / 0 / 0	45 / 0 / 0	40 / 0 / 0	43 / 0 / 0	45 / 0 / 0	

Options

Type	Material name	EMRQ-AB
Drain	Central drain pan kit	KWC25C450
Refnet	Refnet header	KHRQ(M)22M29H8
	Refnet header	KHRQ(M)22M64H8
	Refnet joint	KHRQ(M)22M20T8
	Refnet joint	KHRQ(M)22M29T8
	Refnet joint	KHRQ(M)22M64T8

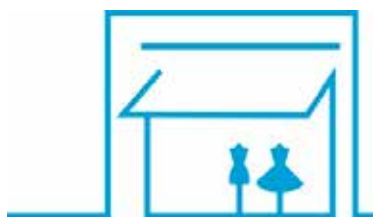
Daikin Altherma R Flex Type HW

With the expanded Daikin Altherma high capacity range we now offer the ideal solutions for all high demanding systems. Ideal for collective housing, hotels, swimming pools which require high comfort and high reliability.

Why choose a Daikin Altherma LT high capacity ?

✓ Strong and reliable

- › Equipped with air-to-water heat pump technology to extract the outdoor air for energy
- › COP possible up to 3.07/A+ at Ta DB/WB 7/6°C - LWC 45°C
- › Reversible, enhanced cooling capacity
- › External control possible



✓ Collective/commercial advantage

- › Cascade heating capacity up to 62,7 kW
- › Cascade cooling up to 63,3 kW
- › VRV technology ensures high efficiencies and reliable working
- › Compact model for easy installation and fit for smaller spaces




Daikin Altherma

low temperature high capacity

- › Hydronic module for indoor installation eliminating the need for glycol
- › Ideal for colder climates as the lack of glycol will allow for high efficiency
- › Compact dimensions and limited pipework allow for installation in very restricted spaces
- › Easy transportation as separate units will fit in an elevator


R-410A

Heating & Cooling					SEHVX20BAW/ SERHQ020BAW1	SEHVX32BAW/ SERHQ032BAW1	SEHVX40BAW/ SERHQ020BAW1+SERHQ020BAW1	SEHVX64BAW/ SERHQ032BAW1+SERHQ032BAW1
Cooling capacity	Nom.			kW	21.2 (1)	31.8 (1)	42.3 (1)	63.3 (1)
Heating capacity	Nom.			kW	20.8 (2)	31.2 (2)	41.7 (2)	62.7 (2)
Power input	Cooling	Nom.		kW	7.47 (1)	12.7 (1)	15.1 (1)	25.5 (1)
	Heating	Nom.		kW	6.76 (2)	10.6 (2)	13.7 (2)	21.4 (2)
EER					2.84	2.5	2.8	2.48
COP					3.07	2.93	3.03	2.93
Space heating	Average climate	General	SCOP	%	3.93	3.53	3.80	3.53
	water outlet 35°C		ns (Seasonal space heating efficiency)		154	138	149	138
					A++	A+		
Unit for indoor installation					SEHVX20BAW	SEHVX32BAW	SEHVX40BAW	SEHVX64BAW
Dimensions	Unit	Height	Width	mm	1,573			
					766			
					396			
Weight	Unit			kg	97.0	105	137	153
	Packed unit			kg	109	117	149	165
	Type				Brazed plate			
Water side Heat exchanger	Water volume			l	3	5	6	9
	Water flow rate	Cooling	Nom.	l/min	60 (3)	90 (3)	120 (3)	181 (3)
		Heating	Nom.	l/min	60 (2)	90 (2)	120 (2)	181 (2)
Sound power level	Nom.			dBA	63		66	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-5~43			
		Water side	Min.~Max.	°CDB	5 (4)~20			
	Heating	Ambient	Min.~Max.	°CDB	-15~35			
		Water side	Min.~Max.	°CDB	25~50			
Refrigerant	Type / GWP				R-410A / 2,087.5			
	Circuits	Quantity			1		2	
Water circuit	Control				Electronic expansion valve			
	Piping connections diameter			inch	1-1/4" (female)		2" (female)	
	Piping			inch	1-1/4"		1-1/2"	
	Water pressure drop	Cooling	Nom.	kPa	17 (7)	24 (7)	19 (7)	29 (7)
	Total water volume			l	4.2 (8)	5.8 (8)	7.9 (8)	11.0 (8)
Power supply	Phase/Frequency/Voltage			Hz/V	3N~/50/400			
Outdoor Unit					SERHQ020BAW1		SERHQ032BAW1	
Dimensions	Unit	Height	Width	mm	1,680			
					765			
					930			
Weight	Unit			kg	240		316	
	Packed unit			kg	273		356	
Compressor	Quantity				2		3	
Fan	Type				Hermetically sealed scroll compressor			
	Type				Axial			
	Quantity				1		2	
	Air flow rate	Cooling	Nom.	m³/min	185		233	
		Heating	Nom.	m³/min	185		233	

(1) Cooling: entering evaporator water temp. 12°C; leaving evaporator water temp. 7°C; ambient air temp. 35°C (2) Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) (3) Condition: Ta 35°C - LWE 7°C (DT = 5°C) (4) Water can be used above 5°C. Between 0°C and 5°C a 30% glycol solution (propylene or ethylene) has to be used. Between 0°C and -10°C a 40% glycol solution (propylene or ethylene) has to be used (see installation manual and information related to OPZL option) (5) Excluding water volume in the unit. In most applications this minimum water volume will have a satisfying result. In critical processes or in rooms with a high heat load though, extra water volume might be required. Refer to operation range for more info. (6) Excluding the water volume in the unit. This volume will guarantee sufficient defrost energy for all applications, however, this volume can be multiplied by 0.66 if the heating setpoint is ≥ 45°C (e.g. Fan coils) (7) This is PD between inlet & outlet connections of unit. It includes the water side heat exchanger pressure drop. (8) Including piping + PHE; excluding expansion vessel



Daikin Altherma 3 GEO

Top performance even in coldest climate

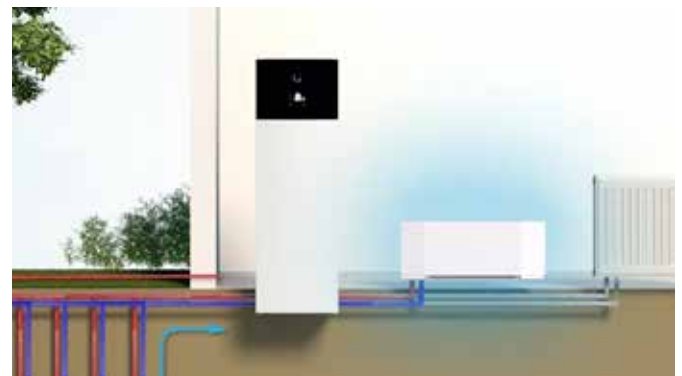
Unlimited energy use

Ground source heat pump technology uses stable geothermal energy, unaffected by the outside temperature.



Heating mode


During winter, use thermal energy stored in the ground to heat up your home and provide domestic hot water.



Cooling mode

During summer, use the relatively lower temperature of the ground to cool down your home with very high efficiency.

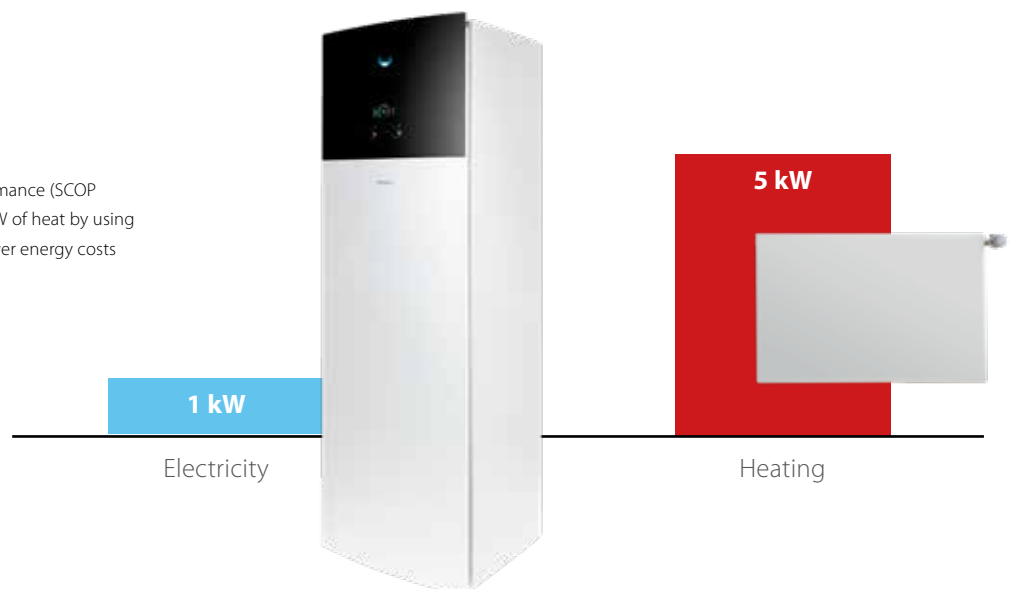With a cold climate seasonal coefficient of performance (SCOP BOW35) of 5,69 Daikin Altherma 3 GEO delivers 5kW of heat by using less than 1kW of electricity. This translates into lower energy costs and reduced CO₂ emissions.





Madoka wired remote controller for Daikin Altherma

A new generation of user interface, redesigned and intuitive.

- ✓ Intuitive control with a premium design
- ✓ Three colors to match any interior design
- ✓ Easily set operation parameters



BRC1HHDW



BRC1HHDS






BRC1HHDK

LAN connectivity



Always in control.
Control your climate from any place, at any time.

-  Monitor the status of your heating system
-  Control the operation mode and set temperature
-  Schedule the set temperature and operation mode

Groundbreaking innovation

Why choose a Daikin Altherma ground source heat pump

The Daikin Altherma ground source heat pump uses geothermal energy and Daikin's inverter heat pump technology to deliver heating and hot water in all climates.



✓ Simple solution for installers

Quick and easy installation

- › Full integration of the heat pump module and factory-fitted domestic hot water tank reduces installation time
- › Pipework connections are placed on the top of the unit for accessibility
- › Lightweight unit is easy to transport and install

Compact design

- › No larger than an average household appliance, the unit's sleek design fits neatly in any standard room
- › Requires only 10 mm of side clearance



Installation care

Quick and easy installation thanks to factory-fitted piping on top of the unit, pre-cabled electrical connections and reduced overall weight.

- ✓ All pipe connections on top, paired in and out connections
- ✓ Standard electrical connections pre-cabled: plug-and-play
- ✓ All terminal blocks on top front, easy to access
- ✓ Small footprint: install in confined spaces
- ✓ All operations from top and front, no additional space required on the sides
- ✓ Removable compressor module with quick connectors: easy to transport, install and service
- ✓ Easy to maneuver thanks to integrated handles at the back
- ✓ Quick commissioning via the advanced user interface with quick wizard, SD card or USB stick



Daikin Altherma 3 GEO

Ground source heat pump for heating, cooling & hot water

- › Top-level seasonal efficiency thanks to our inverter heat pump technology providing the highest savings on running costs.
- › Delivering temperatures up to 65°C at high efficiency, the R-32 Daikin Altherma 3 GEO is suitable for underfloor heating/cooling, fan coils and radiators.
- › Integrated indoor unit: all-in-one floor standing unit including the stainless steel domestic hot water tank saves space and installation time.
- › The unit has a similar footprint when compared to other household appliances.
- › Reversible heat pump, allowing heating and cooling.



A+++

(1)



A

65°C

R-32

Indoor Unit					EGSA(H/X)		06D9W(G)		10D9W(G)		
Space heating	Average climate water outlet 55°C	General	ηs (Seasonal space heating efficiency)	%			-			-	
			Seasonal space heating eff. class				-			-	
	Average climate water outlet 35°C	General	ηs (Seasonal space heating efficiency)	%			-			-	
			Seasonal space heating eff. class				-			-	
Domestic hot water heating	General	Declared load profile					L				
	Average climate	ηwh (water heating efficiency)	%				-			-	
Heating capacity	Water heating energy efficiency class						A				
	Min.				kW	1.0				1.0	
	Nom.				kW	3.2				5.4	
	Max.				kW	8.5				10.0	
Power input	Nom.					kW	-				-
COP							-				-
Casing	Colour						White or Silver-grey				
	Material						Precoated sheet metal				
Dimensions	Unit	HeightxWidthxDepth			mm	1,866x597x668					
Weight	Unit				kg	210					
Tank	Water volume					l	180				
	Insulation	Heat loss				kWh/24h	-				-
	Corrosion protection						-				-
Operation range	Domestic hot water	Water side Min.~Max.			°C	- / 60					
Refrigerant	Type						R-32				
	GWP						675				
	Charge				kg	1.7					
	Charge				TCO2Eq	1.15					
	Control						-				-
Sound power level	Nom.					dBA	-				-
Sound pressure level	Nom.					dBA	-				-
Power supply	Name/Phase/Frequency/Voltage					Hz/V	3~/50/400 or 1~/50/230				
Current	Recommended fuses					A	3P 16A or 1P 32A				

(1) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Note: Blue cells contain preliminary data

Options

	Type	Material name
Controls	Remote user interface	BRC1HHDW/S/W
	Room thermostat (wired)	EKRTWA
	Room thermostat (wireless)	EKRTR1
	Cascade control	EKCC8-W
	Gateway	DCOM-LT/IO
	Gateway	DCOM-LT/MB
Adapter	Demand PCB	EKRP1AHTA
	Digital I/O PCB	EKRP1HBAA
Sensor	Remote indoor sensor	KRCS01-1
	External sensor	EKRTETS
	Reduce power limitation sensor	EKCSSENS
Valve	Valve kit	EKVK1A/2A/3A
Others	PC cable	EKPCAB4
	Ground source filling kit	KGSFILL2
	Hydromodule replacement	EKGSHYDMOD
	Separate power supply BUH	EKGSPOWCAB
	Magnetic filter Fernox	K.FERNOXTF1
	Magnetic filter Fernox	K.FERNOXTF1FL

Daikin Altherma

ground source heat pump

Ground source heat pump for heating & hot water

- › Ground source heat pump technology uses stable geothermal energy, unaffected by the outside temperature
- › Highest seasonal efficiency thanks to our inverter heat pump technology
- › Quick and easy installation thanks to factory-fitted piping on top of the unit and reduced overall weight
- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › User interface with thermostat function for higher comfort, quick commissioning, easy servicing and energy management to control energy consumption and costs



Indoor Unit				EGSQH	10S18A9W
Space heating	Average climate water outlet 55°C	General	η _s (Seasonal space heating efficiency)	%	144
			Seasonal space heating eff. class		A++
	Average climate water outlet 35°C	General	η _s (Seasonal space heating efficiency)	%	202
			Seasonal space heating eff. class		A++
Domestic hot water heating	General	Declared load profile			L
	Average climate	η _{wh} (water heating efficiency)	%		93.1
		Water heating energy efficiency class			A
Heating capacity	Min.			kW	3.11(1) / 2.47(2)
	Nom.			kW	10.2(1) / 9.29(2)
	Max.			kW	13.0(1) / 11.9(2)
Power input	Nom.			kW	2.34(1) / 2.82(2)
COP					4.35(1) / 3.29(2)
Casing	Colour				White
	Material				Precoated sheet metal
Dimensions	Unit	HeightxWidthxDepth		mm	1,732x600x728
Weight	Unit			kg	210
Tank	Water volume			l	180
	Insulation	Heat loss		kWh/24h	1.36
	Corrosion protection				Anode
Operation range	Domestic hot water	Water side Min.~Max.		°C	25 / 25 ~55 / 60
Refrigerant	Type				R-410A
	GWP				2,087.5
	Charge			kg	1.80
	Charge			TCO ₂ Eq	3.76
	Control				Electronic expansion valve
Sound power level	Nom.			dBA	46.0
Sound pressure level	Nom.			dBA	32.0
Power supply	Name/Phase/Frequency/Voltage			Hz/V	9W/3~/50/400
Current	Recommended fuses			A	25

(1) EWB/LWB 0°C/-3°C - LWC 35°C (DT=5°C) (2) EWB/LWB 0°C/-3°C - LWC 45°C (DT=5°C) (3) Contains fluorinated greenhouse gases

Options

	Type	Material name
Controls	LAN adapter	BRP069A62
	LAN adapter + PV solar connection	BRP069A61
	Remote user interface (DE, FR, NL, IT)	EKRUCBL1
	Remote user interface (EN, ES, EL, PT)	EKRUCBL3
	Remote user interface (EN, SV, NO, FI)	EKRUCBL2
	Remote user interface (EN, TR, PL, RO)	EKRUCBL4
	Remote user interface (DE, CS, SL, SK)	EKRUCBL5
	Remote user interface (EN, HR, HU, BG)	EKRUCBL6
	Remote user interface (EN, DE, RU, DA)	EKRUCBL7
	Simplified user interface	EKRUCBSB
	Room thermostat (wired)	EKRTWA
	Room thermostat (wireless)	EKTRT1
	DCOM gateway	DCOM-LT/IO
	DCOM gateway	DCOM-LT/MB
	Demand PCB	EKRP1AHTA
Adapter	Digital I/O PCB	EKRP1HBAA
Installation	Wire harness	EKGSCONBP1
Sensor	Remote indoor sensor	KRCS01-1B
	External sensor	EKRTETS
Valve	Valve kit	EKV1A/2A/3A
Others	PC cable	EKPCCAB1
	Ground source filling kit	KGSFILL

Daikin Altherma hybrid heat pump



Why choose a Daikin Altherma hybrid heat pump

The Daikin Altherma hybrid heat pump is the ideal solution to replace your old gas boiler.


Comfort

Heating

A Daikin Altherma hybrid heat pump automatically determines the most economic and energy efficient heating combination

- › **Heat pump operation:** the best available technology for optimising running costs at moderate outdoor temperatures
- › **Hybrid operation:** both the gas boiler and heat pump operate simultaneously to deliver the ultimate comfort for your customer
- › **Gas operation:** when outdoor temperatures drastically drop, the unit will automatically switch to gas operation mode

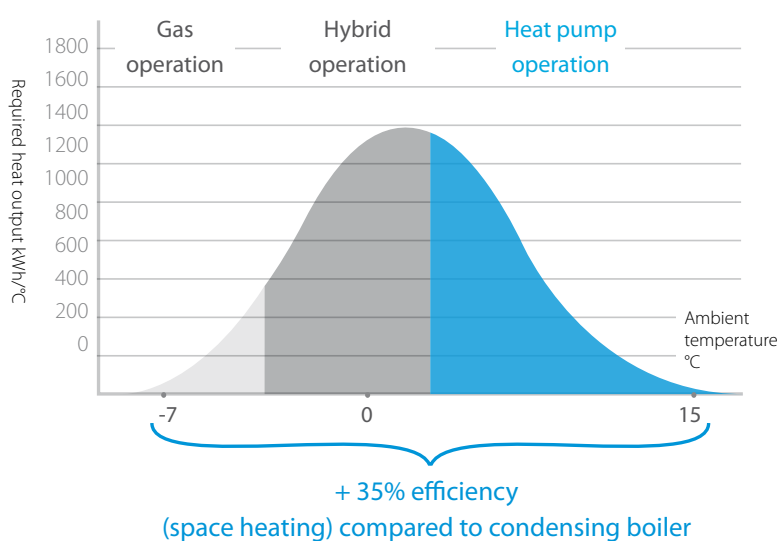
Illustration of an average European climate



- › Heat load: 14 kW
- › 70% heat pump output
- › 30% gas boiler output

Heat load = the capacity of the space heating system required to maintain comfortable indoor temperatures at any time

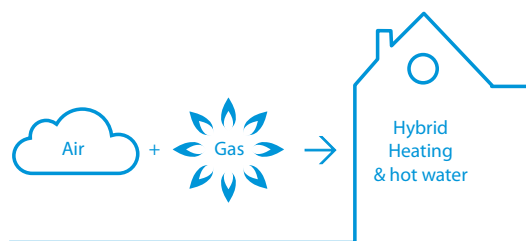Required heat output = heat load x n° of occurring hours per year



Heat pump outdoor unit



Heat pump indoor unit

Hot water

The gas condensing boiler's dual heat exchanger increases hot water efficiency by up to 15% when compared with traditional gas boilers

Cooling

Incorporate cooling for a total solution that integrates seamlessly with underfloor heating or radiators

Quick and easy installation

As the heat pump indoor unit and gas condensing boiler are delivered as separate units, they are easier to handle, operate and install

Investment benefits

- › Combines with existing radiators; reducing the cost and disruption of installations
- › Coverage of heat loads up to 27 kW makes this unit ideal for renovation applications
- › Possible to connect to photovoltaic solar panels to optimise self-consumption of the electricity produced

Heat pumps



Energy efficiency

The ideal combination

Depending on the outdoor temperature, energy prices and the internal heat load, the Daikin Altherma hybrid heat pump smartly chooses between the heat pump and/or the gas boiler, possibly in simultaneous operation, and always selects the most economic operation mode.

Supported by renewable energy

When working in heat pump mode, the system is powered by renewable energy extracted from the air and can achieve up to **A++ energy efficiency**.

Hot water produced with gas condensing technology

Unique dual heat exchanger increases efficiency up to 15% compared to traditional gas boilers

- › Cold tap water flows directly into the heat exchanger
- › Optimal and continuous condensing of the flue gases during domestic hot water preparation



Reliability

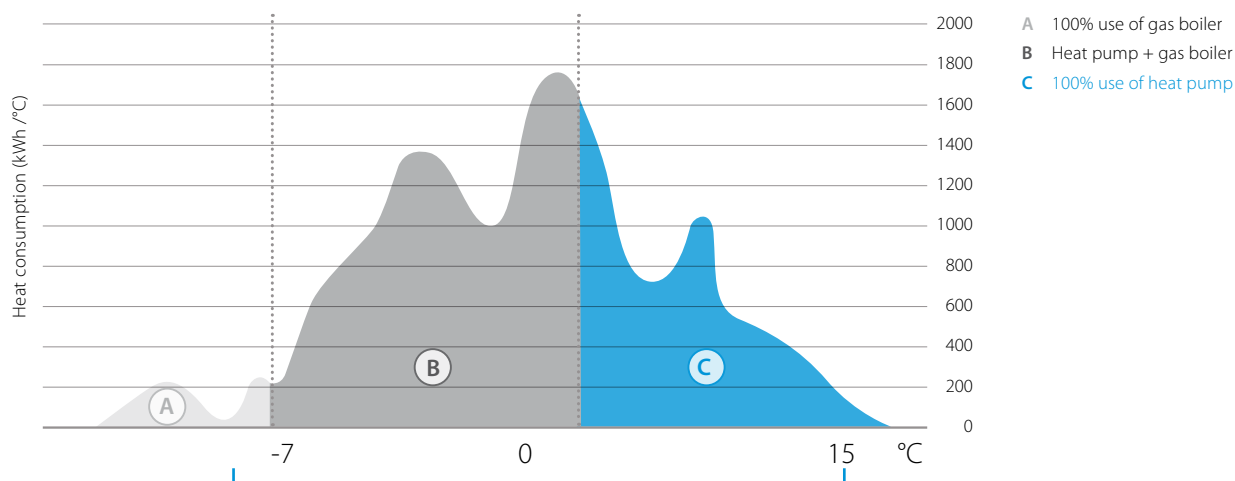
- › Low investment cost with no need to replace existing piping and radiators
- › Low running costs for heating and domestic hot water
- › Compact dimensions
- › Ideal for renovation applications
- › Easy and fast installation



Case study

Replacing a gas boiler with a Daikin Altherma hybrid heat pump means saving on running costs for both space heating and domestic hot water supply.

A running costs comparison is made below based on parameters for a typical Belgian winter. As a result of the hybrid principle, the most cost-efficient operation will be used no matter the ambient outdoor temperature.



+35% efficiency (space heating) compared to existing condensing gas boiler

	Daikin altherma hybrid heat pump	New gas condensing boiler	Existing gas condensing boiler
Space heating			
Energy supplied by HP	12,800 kWh		
HP efficiency	3.64 Scop		
Energy supplied by gas boiler	6,700 kWh	19,500 kWh	19,500 kWh
Space heating efficiency	90%	90%	75%
Running costs	1,220 €	1,520 €	1,820 €
DHW HEATING			
Energy supplied by gas boiler*	3,000 kWh	3,000 kWh	3,000 kWh
DHW heating efficiency*	90%	80%	65 %
Running costs*	230 €	260 €	320 €
TOTAL			
Running costs	1,450 €	1,780 €	2,140 €

Conditions

Heat load	16 kW
Design temperature	-8°C
Space heating off temperature	16°C
Maximum water temperature	60°C
Minimum water temperature	38°C
Gas price	0.070 €/kWh
Electricity price (day)	0.237 €/kWh
Electricity price (night)	0.152 €/kWh
Total space heating requirement	19,500 kWh
Total DHW heating requirement (4 persons)	3,000 kWh

* for combi-boiler, no separate domestic hot water tank

➔ **Yearly savings:**
for space heating and domestic hot water

-19% versus new gas condensing boiler

330 €/year

-32% versus existing gas condensing boiler

690 €/year

Daikin Altherma hybrid heat pump

Hybrid technology combining condensing gas and air to
water heat pump for heating and hot water

- › Heating only + heating and cooling models
- › Depending on outdoor temperature, energy prices and internal heat load, Daikin Altherma hybrid heat pump always selects the most economical mode to operate
- › Low investment cost: no need to replace the existing radiators (up to 80°C) and pipe work
- › Provides sufficient heat in renovation applications as all heat loads are covered up to 32kW
- › Easy and fast installation thanks to the compact dimensions and quick interconnections



A++



A

55°C

R-410A

Efficiency data					EHYHBH05AV32 + EVLQ05CV3	EHYHBH08AV32 + EVLQ08CV3	EHYHBX08AV3 + EVLQ08CV3
Space heating	Average climate water outlet 55°C	General	SCOP	%	3.28	3.24	3.29
			η _{sp} (Seasonal space heating efficiency)	%	128	127	129
			Seasonal space heating eff. class			A++	
Domestic hot water heating	Average climate	General	Declared load profile	%		XL	
			η _{wh} (water heating efficiency)	%		95.8	
			Water heating energy efficiency class			A	
Heating capacity	Nom.			kW	4.40(1) / 4.03(2)	7.40(1) / 6.89(2)	7.40(1) / 6.89(2)
Cooling capacity	Nom.			kW	-	-	6.86(1) / 5.36(2)
Power input	Heating	Nom.		kW	0.870(1) / 1.13(2)	1.66(1) / 2.01(2)	1.66(1) / 2.01(2)
	Cooling	Nom.		kW	-	-	2.01(1) / 2.34(2)
COP					5.04(1) / 3.58(2)	4.45(1) / 3.42(2)	4.45(1) / 3.42(2)
EER					-	-	3.42(1) / 2.29(2)

Indoor unit (Hydrobox & Boiler)					EHYHBH05AV32	EHYHBH08AV32	EHYHBX08AV3	EHYKOMB33AA2	EHYKOMB33AA3
Central heating	Heat input Q _h (net calorific value)	Nom	Min/Max	kW	-	-	-	6.2 / 7.6 / 7.6 / 22.1 / 27.0 / 27.0	-
	Output P _h at 80/60°C	Min/Nom		kW	-	-	-	6.7 / 8.2 / 8.2 / 21.8 / 26.6 / 26.6	-
	Efficiency	Net calorific value		%	-	-	-	98 / 107	-
	Operation range	Min/Max		°C	-	-	-	15 / 80	-
Domestic hot water	Output	Min/Nom		kW	-	-	-	7.6 / 32.7	-
	Water flow	Rate	Nom	l/min	-	-	-	9.0 / 15.0	-
	Operation range	Min/Max		°C	-	-	-	40 / 65	-
	Connection	Diameter		mm	-	-	-	15	-
Gas	Consumption (G20)	Min/Max		m ³ /h	-	-	-	0.78 / 3.39	-
	Consumption (G25)	Min/Max		m ³ /h	-	-	-	0.90 / 3.93	-
	Consumption (G31)	Min/Max		m ³ /h	-	-	-	0.30 / 1.29	-
	Connection			mm	-	-	-	100	-
Supply air	Concentric				-	-	-	1	-
	Connection			mm	-	-	-	60	-
Flue gas	Connection			mm	-	-	-	60	-
Casing	Colour				White	-	-	White - RAL9010	-
	Material				Precoated sheet metal	-	-	Precoated sheet metal	-
Dimensions	Unit	HeightxWidthxDepth	Casing	mm	902x450x164	-	-	710x450x240	-
Weight	Unit	Empty		kg	30.0	31.2	-	36	-
Power supply	Phase/Frequency/Voltage			Hz/V	-	-	-	1~/50/230	-
Electrical power consumption	Max.			W	-	-	-	55	-
	Standby			W	-	-	-	2	-
Operation range	Heating	Ambient	Min.~Max.	°C	-25 ~25	-	-	-	-
		Water side	Min.~Max.	°C	25 ~55	-	-	-	-
	Cooling	Ambient	Min.~Max.	°CDB	~--	10 ~43	-	-	-
		Water side	Min.~Max.	°C	~--	5 ~22	-	-	-
					-	-	-	-	-
					-	-	-	-	-

Outdoor unit					EVLQ05CV3		EVLQ08CV3	
Dimensions	Unit	HeightxWidthxDepth		mm	735x832x307		735x832x307	
Weight	Unit			kg	54		56	
Compressor	Quantity				1		1	
	Type				Hermetically sealed swing compressor		Hermetically sealed swing compressor	
Operation range	Heating	Min.~Max.		°CWB	-25 ~25		-25 ~25	
Refrigerant	Type				R-410A		R-410A	
	GWP				2,088		2,088	
	Charge			kg	1.5		1.6	
	Charge			TCO ₂ Eq	3.0		3.3	
	GWP				2,088		2,088	
Sound power level	Heating	Nom.		dBA	61		62	
Sound pressure level	Heating	Nom.		dBA	48		49	
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/230		V3/1~/50/230	
Current	Recommended fuses			A	16		20	

(1) Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) (3) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (4) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

Daikin Altherma R Hybrid + multi



The Daikin Altherma hybrid heat pump can also be combined with an air-to-air multi system to provide optimal cooling. Easily installed and managed via an app on a smartphone or tablet, the Daikin Altherma hybrid heat pump + multi is an all-in-one system for heating, cooling and hot water purposes.

→ Multi features

- ✓ Equipped with Bluevolution technology
- ✓ 3, 4 and 5 ports for multi outdoor units
- ✓ Combinable with different Split & Sky Air indoor units:
One port can be used for hot water production

Control with Daikin Online Controller app



BLUEVOLUTION

	Hybrid heat pump		Wall mounted												Concealed ceiling								Floor standing			Round flow cassette			Fully flat cassette				Ceiling suspended			Concealed floor standing																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
			FTXJ-MW/S				CTXM-M	FTXM-M							FDXM-F3				FBA-A				FVXM-F	FCAG-A			FFA-A				FHA-A			FNA-A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	CHYHBH-AV32																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					

Efficiency data				CHYHBH05AV32 /3MXM52N	CHYHBH05AV32 /3MXM68N	CHYHBH05AV32 /4MXM68N	CHYHBH05AV32 /4MXM80N	CHYHBH08AV32 /4MXM80N	CHYHBH05AV32 /5MXM90N	CHYHBH08AV32 /5MXM590N
Heating capacity	Nom.		kW	4.41 (1)		4.50 (1)		6.78 (1)	4.50 (1)	6.78 (1)
COP				4.49 (1)	3.91 (1)		4.04 (1)	4.17 (1)	4.04 (1)	4.17 (1)
Pump							51.80 (1)			
Seasonal efficiency	Domestic hot water heating	General Average climate	Declared load profile η _{wh} (water heating efficiency)				XL			
			%				96			
Water heating energy efficiency class							A			







(1) DB/WB 7°C/6°C - LWC 35°C (DT=5°C), boiler bypassed

Indoor Unit (Hydrobox)				CHYHBH05AV32		CHYHBH08AV32	
Casing	Colour			White			
	Material			Precoated sheet metal			
Dimensions	Unit	HeightxWidthxDepth	mm	902x450x164			
Weight	Unit		kg	30.0			
Operation range	Heating	Ambient	Min.~Max.	°C		-15 ~24	
		Water side	Min.~Max.	°C		25 ~50	

Indoor unit (Boiler)				EHYKOMB33AA2/AA3			
Central heating	Heat input Q _n (net calorific value)	Nom	Min/Max	kW	6.2 / 7.6 / 7.6/22.1 / 27.0 / 27.0		
	Output P _n at 80/60°C	Min/Nom		kW	6.7 / 8.2 / 8.2/21.8 / 26.6 / 26.6		
	Efficiency	Net calorific value		%	98 / 107		
	Operation range	Min/Max		°C	15 / 80		
Domestic hot water	Output	Min/Nom		kW	7.6/32.7		
	Water flow	Rate	Nom	l/min	9.0 / 15.0		
	Operation range	Min/Max		°C	40/65		
Gas	Connection	Diameter		mm	15		
	Consumption (G20)	Min/Max		m ³ /h	0.78/3.39		
	Consumption (G25)	Min/Max		m ³ /h	0.90/3.93		
	Consumption (G31)	Min/Max		m ³ /h	0.30/1.29		
Supply air	Connection			mm	100		
	Concentric				1		
Flue gas	Connection			mm	60		
Casing	Colour				White - RAL9010		
	Material				Precoated sheet metal		
Dimensions	Unit	HeightxWidthxDepth	Casing	mm	710x450x240		
Weight	Unit	Empty		kg	36		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230		
Electrical power consumption	Max.			W	55		
	Standby			W	2		

Outdoor unit					3MXM52N	3MXM68N	4MXM68N	4MXM80N	5MXM90N
Dimensions	Unit	HeightxWidthxDepth		mm	734x958x340				
Weight	Unit			kg	57	62	63	67	68
Sound power level	Cooling			dBA	59	61	61		64
	Heating			dBA	59	61	61		64
Sound pressure level	Cooling	Nom.		dBA	46	48	48	49	52
	Heating	Nom.		dBA	47	48	48	49	52
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~46				
	Heating	Ambient	Min.~Max.	°CWB	-15~18				
Refrigerant	Type				R-32				
	GWP				675				
	Charge			kg/TCO ₂ /Eq	1.80/1.2	2.00/1.4	2.00/1.4	2.40/1.6	
Piping connections	Liquid	OD		mm	6.35				
	Gas	OD		mm	9.5				
	Piping length	OU - IU	Max.	m	25				
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 30m)				
	Level difference	IU - OU	Max.	m	15				
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240				
Current - 50Hz	Maximum fuse amps (MFA)			A	30				

Options

		Type	Material name
Controls		LAN adapter	BRP069A62
		LAN adapter + PV solar connection	BRP069A61
		Remote user interface (DE, FR, NL, IT)	EKRUCBL1
		Remote user interface (EN, ES, EL, PT)	EKRUCBL3
		Remote user interface (EN, SV, NO, FI)	EKRUCBL2
		Remote user interface (EN, TR, PL, RO)	EKRUCBL4
		Remote user interface (DE, CS, SL, SK)	EKRUCBL5
		Remote user interface (EN, HR, HU, BG)	EKRUCBL6
		Remote user interface (EN, DE, RU, DA)	EKRUCBL7
		Simplified user interface	EKRUCBSB
		Room thermostat (wired)	EKRTWA
		Room thermostat (wireless)	EKRTR1
		Heat meter (EHYHBH* only)	K.HEATMET
		DCOM gateway	DCOM-LT/IO
		DCOM gateway	DCOM-LT/MB
Drain		Drain pan for reversible H/B	EKHYDP1
Installation		Cover plate 35	EKHY093467
		Installation jig	EKHYMNT1
Sensor		External sensor	EKRTETS
Valve		Valve kit for connection to 3rd party tank with built-in thermostat	EKHY3PART2
		Valve kit for connection to 3rd party tank with sensor pocket	EKHY3PART
Propane set		Propane set	EKHY075787

Type	Material name
Adapter Flex-Fixed PP 100	EKFGP6316
Adapter Flex-Fixed PP 130	EKFGS0252
Chimney Connection 60/100	EKFGP4678
Chimney Connection 60/100	EKFGP4678
Chimney Connection 80/125	EKFGP4828
Chimney Connection 60/10 Air Intake Dn. 80 C83	EKFGV1101
Chimney Top PP 100 incl. Flue Pipe	EKFGP5497
Chimney Top PP 130 incl. Flue Pipe	EKFGP5197
Concentric connection Ø 80/125	EKHY090717
Connector Flex-Flex PP 100	EKFGP6325
Connector Flex-Flex PP 130	EKFGP6366
Connector Flex-Flex PP 80	EKFGP6324
Connection set 60/10-60 Flue/Air intake Dn. 80 C53	EKFGV1102
Eccentric connection Ø 80	EKHY090707
Elbow PP/ALU 80/125 90°	EKFGP4810
Elbow PP/GLV 60/100 30°	EKFGP4664
Elbow PP/GLV 60/100 45°	EKFGP4661
Elbow PP/GLV 60/100 90°	EKFGP4660
Elbow PP/GLV 80/125 30°	EKFGP4814
Elbow PP MB-AIR 80 90°	EKFGW4085
Elbow PP BM-AIR 80 45°	EKFGW4086
Extension Flex PP 100 L=10 M	EKFGP6346
Extension Flex PP 100 L=15 M	EKFGP6349
Extension Flex PP 100 L=25 M	EKFGP6347
Extension Flex PP 130 L=30 M	EKFGS0250
Extension Flex PP 80 L=10 M	EKFGP6340
Extension Flex PP 80 L=15 M	EKFGP6344
Extension Flex PP 80 L=25 M	EKFGP6341
Extension Flex PP 80 L=50 M	EKFGP6342
Extension PP 60x500	EKFGP5461
Extension PP/GLV 60/100 x 1000mm	EKFGP4652
Extension PP/GLV 60/100 x 500mm	EKFGP4651
Extension PP/GLV 80/125 x 1000mm	EKFGP4802
Extension PP/GLV 80/125 x 500mm	EKFGP4801
Extension P BM-Air 80x500	EKFGW4001
Extension P BM-Air 80x1000	EKFGW4002
Extension P BM-Air 80x2000	EKFGW4004
Filling loop set	EKFL1AA
Flex 100-60 + Support Elbow	EKFGP6354
Flex 130-60 + Support Elbow	EKFGS0257
Flex Kit PP Dn.60-80	EKFGP1856
Flex Kit PP Dn.8	EKFGP2520
Flue Deflector 60 (UK Only)	EKFGP1295
Flue gas non-return flap	EKFGF1A
Gas conversion kit from G20 to G25	EKPS076227
Inspection Elbow Plus PP/ALU 80/125 90° EPDM	EKFGP4820
Meas. Tee with Inspection Panel PP/GLV 60/100	EKFGP4667
Plume Managment Kit 60 (UK Only)	EKFGP1294
PMK Elbow 60 45° (2 pcs) (UK Only)	EKFGP1285
PMK Elbow 60 90° (UK Only)	EKFGP1284
PMK Extension 60 L=1000 incl. breaket (UK Only)	EKFGP1286
Roof Terminal PP/GLV 60/100 AR460	EKFGP6837
Roof Terminal PP/GLV 80/125 AR300 Ral-9011	EKFGP6864
Spacer PP 80-100	EKFGP6333
Support Breaket Top Inox Dn.100	EKFGP6337
Support Breaket Top Inox Dn.130	EKFGP6353
Tee Flex 100 Boiler Connectionset 1	EKFGP6368
Tee Flex 130 Boiler Connectionset 1	EKFGP6215
Thermistor recirculator	EKTH2
Wall Bracket Dn.100	EKFGP4481
Wall Bracket Dn.100	EKFGP4631
Wall Terminal Kit low profile PP/GLV 60/100	EKFGP1293
Wall Terminal Kit low profile PP/GLV 60/100	EKFGP297 7
Wall Terminal Kit PP/GLV 60/100	EKFGP2978
Wall Terminal Kit PP/GLV 60/100	EKFGP1292
Wall Terminal Kit PP/GLV 80/125	EKFGW6359
Wall Terminal Kit low profile PP/GLV 60/100 (UK only)	EKFGP1299
Weather Slate Flat Alu 60/100	EKFGP6940
Weather Slate Flat Alu 60/100 0°-15°	EKFGP1296
Weather Slate Flat Alu 80/125	EKFGW5333
Weather Slate Flat Alu 80/125 0°-15°	EKFGP1297
Weather Slate Steep Pb/GLV 60/100 18°-22°	EKFGS0518
Weather Slate Steep Pb/GLV 60/100 23°-27°	EKFGS0519
Weather Slate Steep Pb/GLV 60/100 43°-47°	EKFGS0523
Weather Slate Steep Pb/GLV 60/100 48°-52°	EKFGS0524
Weather Slate Steep Pb/GLV 60/100 53°-57°	EKFGS0525
Weather Slate Steep Pb/GLV 80/125 18°-22°	EKFGT6300
Weather Slate Steep Pb/GLV 80/125 23°-27°	EKFGT6301
Weather Slate Steep Pb/GLV 80/125 43°-47°	EKFGT6305
Weather Slate Steep Pb/GLV 80/125 48°-52°	EKFGT6306
Weather Slate Steep Pb/GLV 80/125 53°-57°	EKFGT6307
Weather Slate Steep PF 60/100 25°-45°	EKFGP7910
Weather Slate Steep PF 80/125 25°-45° Ral-9011	EKFGP7909
Elbow PP 60/100 90° + MP Generic	DR90ELBO60100AA
Wall term Mugro STD 60/100 Telescopic	DRWTER60100AA

Flue gas connections



Heat pumps

Daikin Altherma H Hybrid

The best of 2 worlds

Heat pump



Condensing Boiler



Environmentally friendly

- › Reduced environmental impact thanks to the usage of **R-32 refrigerant**
- › Outdoor unit with **sealed refrigerant circuit**, which greatly reduces the risk of refrigerant leakage



Easy & Quick installation

All hydraulics components are outside.



No F-gas licence required

Only water connections between outdoor and indoor unit. Therefore no F-gas certification is needed for the installer.

Safety in every conditions

The unit can work down to -15°C outside thanks to multiple freeze-up protections



Flexible installation

Compact indoor unit can be installed in a cupboard.



Condensing technology

The condensing technology uses optimum fuel efficiency, with reduced emissions of NOx and CO, to ensure high cost savings and environmentally-friendly operation.



Plug & play

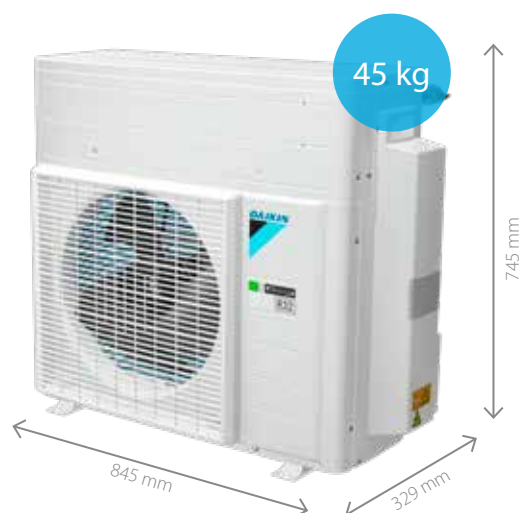
No need of other parts, the pump group is integrated inside.

BLUEVOLUTION


The Bluevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R-32.

Installation possibilities

The Daikin Altherma H Hybrid is made of an outdoor unit of 4 kW:



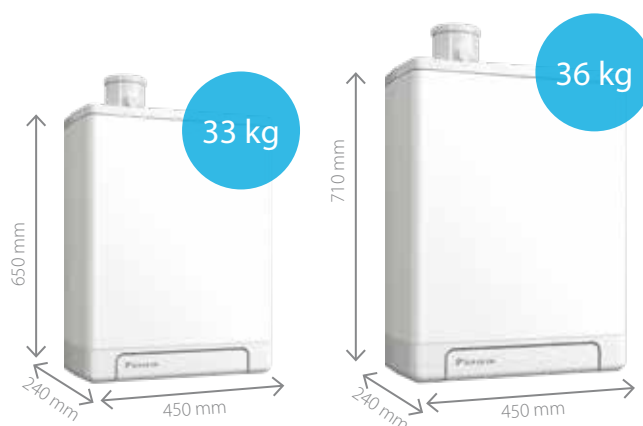The Daikin Altherma H Hybrid is made of a boiler of 28 or 32 kW:



For more domestic hot water production, you can combine the Daikin Altherma H Hybrid with multiple tank options:

Pressureless tanks with solar support

Connect your unit to a ECH₂O thermal store and take advantage of the energy of the sun.



Pressurized tanks

Connect your unit with our full range of stainless steel tanks to answer all needs



Heat pumps

Controls

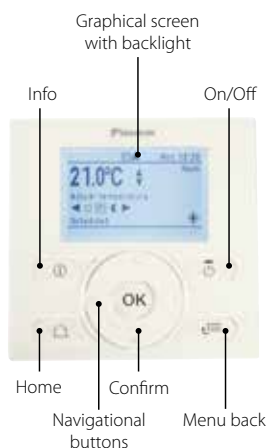
EKRUHML1/2

Control

- › Manage space heating, cooling, domestic hot water and among others, booster mode
- › User-friendly remote control with contemporary design
- › Easy to use with direct accessibility to all main functions

Comfort

- › An additional user interface can include a room thermostat in the space to be heated
- › Easy commissioning: intuitive interface for advanced menu settings



Daikin online controller

Daikin Online Heating Control

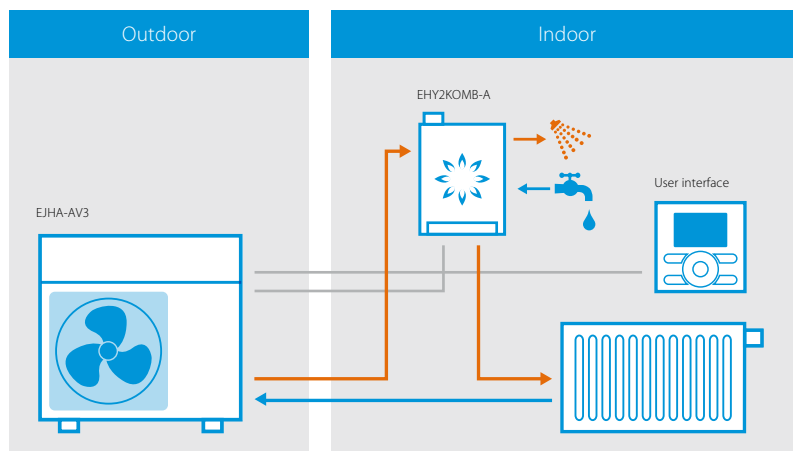
The Daikin Online Control Heating app is a multifaceted programme that allows customers to control and monitor the status of their heating system.



Applications


1. Standard hybrid operation

With this application, the system works in a perfect balance between the gas boiler and the heat pump to provide space heating and domestic hot water. Here, the boiler is able to heat directly the water without a tank.




1.1 Standard hybrid operation with a tank

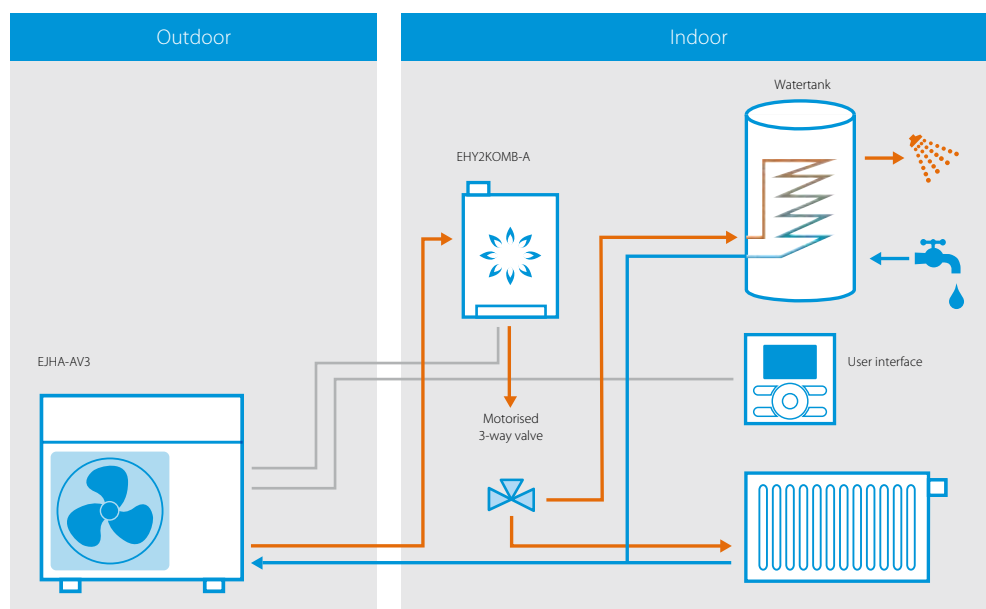In this application, a domestic hot water tank can be added if the system needs to provide high quantity of domestic hot water produced either by the heat pump or by the boiler.



2. Add-on operation

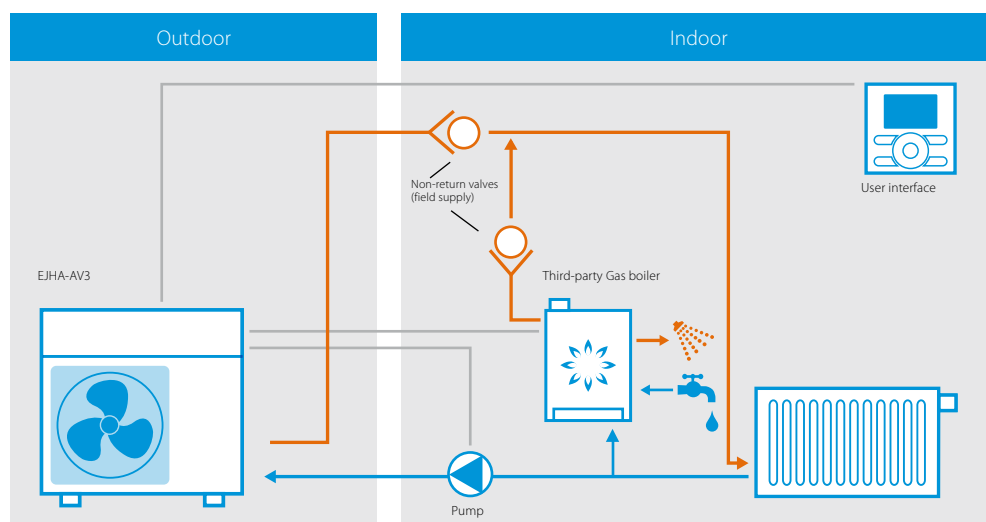Daikin Altherma H Hybrid outdoor unit can be combined with an existing boiler. In such application, the system works in bivalent operation, meaning that this is strictly the heat pump or the boiler that is providing the required heat while in the standard applications, both can work at the same time.



Daikin Altherma Hybrid hydrosplit heat pump

Hybrid technology combining condensing gas and air to water heat pump for heating and hot water




- › Heating only models
- › Depending on outdoor temperature, energy prices and internal heat load, the Daikin Altherma H Hybrid always selects the most economical mode to operate
- › Low investment cost: no need to replace the existing radiators (up to 80°C) and pipe work
- › Provides sufficient heat in renovation applications as all heat loads are covered up to 32kW
- › Easy and fast installation thanks to the compact dimensions and water connections



Heat pumps














R-32


011-1W0293

Efficiency data					EHY2KOMB28AA + EJHA04AAV3		EHY2KOMB32AA + EJHA04AAV3	
Heating capacity	Nom.			kW			3.83 (1)	
Power input	Heating	Nom.		kW			0.85 (1)	
COP							4.49 (1)	
 Space heating	Average climate water outlet 55°C	General	SCOP		3.26		3.28	
			ηs (Seasonal space heating efficiency)	%	127.6		128.1	
			Seasonal space heating eff. class				A++	
 Space heating	Average climate water outlet 35°C	General	SCOP		4.14		4.15	
			ηs (Seasonal space heating efficiency)	%	162.6		163	
			Seasonal space heating eff. class				A++	
 Domestic hot water heating	General	Declared load profile					XL	
	Average climate	ηwh (water heating efficiency)	%				87	
		Water heating energy efficiency class					A	
Indoor unit					EHY2KOMB28AA		EHY2KOMB32AA	
Central heating	Heat input Qh (net calorific value)	Nom	Min/Max	kW	8.0 / 26.3		8.3 / 30.0	
	Output Ph at 80/60°C	Min/Nom		kW	7.1 / 23.1		7.4 / 26.6	
	Efficiency	Net calorific value 80/60		%	97		98	
	Efficiency	Net calorific value 37/30 (30%)		%			>107	
	Operation range	Min/Max		°C			30 / 90	
Domestic hot water	Output	Min/Nom		kW	7.2 / 29.1		7.6 / 32.7	
	Water flow	Rate 60°C	Nom	l/min	7.5		9.0	
	Water flow	Rate 40°C	Nom	l/min	12.5		15.0	
	Operation range	Min/Max		°C			40/65	
	Gas	Connection	Diameter	mm			15	
	Consumption (G20)	Min/Max	m³/h	0.74 / 3.02		0.79 / 3.39		
	Consumption (G31)	Min/Max	m³/h	0.28 / 1.15		0.30 / 1.19		
	Supply air	Connection		mm			100	
	Concentric					1		
Flue gas	Connection			mm			60	
Casing	Colour						White - RAL9010	
	Material						Precoated sheet metal	
Dimensions	Unit	HxWxD	Casing	mm	650x450x240		710x450x240	
Weight	Unit	Empty		kg	33		36	
Power supply	Phase/Frequency/Voltage			Hz/V			1~/50/230	
Electrical power	Max.			W			110	
consumption	Standby			W			2	
Outdoor unit					EJHA04AAV3			
Dimensions	Unit		HxWxD	mm	745x845x329			
Weight	Unit			kg	45			
Compressor	Quantity				1			
	Type				Hermetically sealed swing compressor			
Operation range	Heating		Min.~Max.	°CWB	-15~25			
Refrigerant	Type				R-32			
	GWP				675			
	Charge			kg	0.56			
	Charge			TCO2Eq	0.38			
Sound power level	Heating		Nom.	dBA	58.7			
Sound pressure level	Heating		Nom.	dBA	37			
Power supply	Name/Phase/Frequency/Voltage			Hz/V	V3/1~/50/220-240			
Current	Recommended fuses			A	20			

(1) Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C)

Options - system















Group		Description	Material name	 	
				Pair Hybrid	Add-on Hybrid
Controls		User interface: English – Dutch – Italian – French	EKRUHML1	•	•
		User interface: English – Dutch – Italian – German	EKRUHML2	•	•
		Gateway 1: I/O version	DCOM-LT/IO ⁽²⁾	•	•
		Gateway 2: Modbus version	DCOM-LT/MB ⁽²⁾	•	•
		LAN + PV Solar (installation box EKBRPA6 available)	BRP069A61	•	
		LAN only (installation box EKBRPA6 available)	BRP069A62	•	
		Wired room thermostat	EKRTWA	•	
		Wireless room thermostat	EKRTR1	•	
Sensor		External room sensor	EKRTETS ⁽⁴⁾	•	
		Remote outdoor sensor	EKRSCA1 ⁽³⁾	•	•
Other		Thermistor kit for pressurised tanks & 3rd party tank	EKTH3		
		Thermistor kit for pressureless tanks	EKTH4		
		Bottom plate heater (dedicated type)	EKBPH04JH	•	•
		Ball valves	EKBALLV1	•	•
		Add-on: pump	EKADDONJH		•
		Add-on: cable + 2 non-return valves	EKADDONJH2		•
		PC USB cable	EKPCCAB(1/2/3)	•	
		Connection kit for 3 rd party tank	EKH3PART	•	
		Connection kit for pressureless tank	EKDVCPLT3HX	•	
		Heat pump convactor valve kit	EKVHPC	•	•

(2): compatible with EKRUHML user interface

(3): Only 1 sensor can be connected: indoor OR outdoor sensor

(4): Can only be used in combination with the wireless room thermostat EKRTR1

Options - boiler

Accessory		Sales region	Material name	 	
				23 kW	27 kW
Boiler options		IT, ES, CZ, GR, PL, PT	EKFM1A	•	
		IT, ES, CZ, GR, PL, PT	EKFJL1A		•
		FR, BE	EKFM2A	•	
		FR, BE	EKFJL2A		•
		UK	EKFM3A	•	
		UK	EKFJL3A		•
		DE	EKFM6A	•	
		DE	EKFJL6A		•
		IT, ES, CZ, GR, PL, PT	EKVK4A	•	•
		DE	EKVK6A	•	•
Filling loop set		All	EKFL1A	•	•
3 way valve kit		All	EK3WV1AA ⁽²⁾	•	•
Solar water heater connection set (cable + probe sensor)		All	EKSH1A	•	•
Concentric connection Ø 80/125		All	EKHY090717	•	•
Eccentric connection Ø 80		All	EKHY090707	•	•
Dongle set (wireless connection from PC to boiler)		All	EKDS1A	•	•
Cover plates		All	EKCP1A	•	•
		All	EKHY093467 ⁽¹⁾	•	•
Propane sets (G31)		All	EKHY075787		•
		All	EKPS075867	•	
Conversion kits (G25)		DE, BE, FR	EKPS076217	•	
		DE, BE, FR	EKPS076227		•

Heat pumps

(1): cannot be used in combination with B-packs

(2): Thermistor kit for pressureless tank (compatible with EKHS* and 3rd party tank) is also included. This kit can be used when boiler and tank is within 2 m distance.

	Type	Material name
Flue gas connections	Adapter Flex-Fixed PP 100	EKFGP6316
	Adapter Flex-Fixed PP 130	EKFGS0252
	Chimney Connection 60/100	EKFGP4678
	Chimney Connection 60/100	EKFGP4678
	Chimney Connection 80/125	EKFGP4828
	Chimney Connection 60/10 Air Intake Dn. 80 C83	EKFGV1101
	Chimney Top PP 100 incl. Flue Pipe	EKFGP5497
	Chimney Top PP 130 incl. Flue Pipe	EKFGP5197
	Concentric connection Ø 80/125	EKH-Y090717
	Connector Flex-Flex PP 100	EKFGP6325
	Connector Flex-Flex PP 130	EKFGP6366
	Connector Flex-Flex PP 80	EKFGP6324
	Connection set 60/10-60 Flue/Air intake Dn. 80 C53	EKFGV1102
	Eccentric connection Ø 80	EKH-Y090707
	Elbow PP/ALU 80/125 90°	EKFGP4810
	Elbow PP/GLV 60/100 30°	EKFGP4664
	Elbow PP/GLV 60/100 45°	EKFGP4661
	Elbow PP/GLV 60/100 90°	EKFGP4660
	Elbow PP/GLV 80/125 30°	EKFGP4814
	Elbow PP MB-AIR 80 90°	EKFGW4085
	Elbow PP BM-AIR 80 45°	EKFGW4086
	Extension Flex PP 100 L=10 M	EKFGP6346
	Extension Flex PP 100 L=15 M	EKFGP6349
	Extension Flex PP 100 L=25 M	EKFGP6347
	Extension Flex PP 130 L=30 M	EKFGS0250
	Extension Flex PP 80 L=10 M	EKFGP6340
	Extension Flex PP 80 L=15 M	EKFGP6344
	Extension Flex PP 80 L=25 M	EKFGP6341
	Extension Flex PP 80 L=50 M	EKFGP6342
	Extension PP 60x500	EKFGP5461
	Extension PP/GLV 60/100 x 1000mm	EKFGP4652
	Extension PP/GLV 60/100 x 500mm	EKFGP4651
	Extension PP/GLV 80/125 x 1000mm	EKFGP4802
	Extension PP/GLV 80/125 x 500mm	EKFGP4801
	Extension P BM-Air 80x500	EKFGW4001
	Extension P BM-Air 80x1000	EKFGW4002
	Extension P BM-Air 80x2000	EKFGW4004
	Filling loop set	EKFL1AA
	Flex 100-60 + Support Elbow	EKFGP6354
	Flex 130-60 + Support Elbow	EKFGS0257
	Flex Kit PP Dn.60-80	EKFGP1856
	Flex Kit PP Dn.8	EKFGP2520
	Flue Deflector 60 (UK Only)	EKFGP1295
	Flue gas non-return flap	EKFGF1A
	Gas conversion kit from G20 to G25	EKPS076227

	Type	Material name
Flue gas connections	Inspection Elbow Plus PP/ALU 80/125 90° EPDM	EKFGP4820
	Meas. Tee with Inspection Panel PP/GLV 60/100	EKFGP4667
	Plume Managment Kit 60 (UK Only)	EKFGP1294
	PMK Elbow 60 45° (2 pcs) (UK Only)	EKFGP1285
	PMK Elbow 60 90 (UK Only)	EKFGP1284
	PMK Extension 60 L=1000 incl. breaket (UK Only)	EKFGP1286
	Roof Terminal PP/GLV 60/100 AR460	EKFGP6837
	Roof Terminal PP/GLV 80/125 AR300 Ral-9011	EKFGP6864
	Spacer PP 80-100	EKFGP6333
	Support Breaket Top Inox Dn.100	EKFGP6337
	Support Breaket Top Inox Dn.130	EKFGP6353
	Tee Flex 100 Boiler Connectionset 1	EKFGP6368
	Tee Flex 130 Boiler Connectionset 1	EKFGP6215
	Thermistor recirculator	EK TH2
	Wall Bracket Dn.100	EKFGP4481
	Wall Bracket Dn.100	EKFGP4631
	Wall Terminal Kit low profile PP/GLV 60/100	EKFGP1293
	Wall Terminal Kit low profile PP/GLV 60/100	EKFGP297 7
	Wall Terminal Kit PP/GLV 60/100	EKFGP2978
	Wall Terminal Kit PP/GLV 60/100	EKFGP1292
	Wall Terminal Kit PP/GLV 80/125	EKFGW6359
	Wall Terminal Kit low profile PP/GLV 60/100 (UK only)	EKFGP1299
	Weather Slate Flat Alu 60/100	EKFGP6940
	Weather Slate Flat Alu 60/100 0°-15°	EKFGP1296
	Weather Slate Flat Alu 80/125	EKFGW5333
	Weather Slate Flat Alu 80/125 0°-15°	EKFGP1297
	Weather Slate Steep Pb/GLV 60/100 18°-22°	EKFGS0518
	Weather Slate Steep Pb/GLV 60/100 23°-27°	EKFGS0519
	Weather Slate Steep Pb/GLV 60/100 43°-47°	EKFGS0523
	Weather Slate Steep Pb/GLV 60/100 48°-52°	EKFGS0524
	Weather Slate Steep Pb/GLV 60/100 53°-57°	EKFGS0525
	Weather Slate Steep Pb/GLV 80/125 18°-22°	EKFGT6300
	Weather Slate Steep Pb/GLV 80/125 23°-27°	EKFGT6301
	Weather Slate Steep Pb/GLV 80/125 43°-47°	EKFGT6305
	Weather Slate Steep Pb/GLV 80/125 48°-52°	EKFGT6306
	Weather Slate Steep Pb/GLV 80/125 53°-57°	EKFGT6307
	Weather Slate Steep PF 60/100 25°-45°	EKFGP7910
	Weather Slate Steep PF 80/125 25°-45° Ral-9011	EKFGP7909
	Elbow PP 60/100 90° + MP Generic	DR90ELBO60100AA
	Wall term Mugro STD 60/100 Telescopic	DRWTERT60100AA

Table of content

boilers

Condensing boilers	120
Gas condensing boilers	122
Daikin Altherma 3 C Gas W.....	122
Daikin Altherma C Gas W	128
Daikin Altherma C Gas ECH ₂ O	130
Daikin Altherma C Oil	134



Condensing boilers

Why choose a condensing boiler

Daikin's gas or oil condensing boilers are the best option for individual that plan to replace an existing boiler with a more energy efficient and cost-saving alternative. Both the GCU compact and Wall Mounted Boiler provide end users with reliable performance and efficient heating and hot water.

✓ Comfort

Daikin's gas condensing boilers deliver the ultimate in comfort. Optimal heating ensures seamless operation to deliver reliable year-round heating, even in extreme weather conditions. Instant hot water is possible with our combi range, but also possible with a separate thermal store featuring the ECH₂O tank.

✓ Energy efficiency

Condensing technology

Using latent heat in the flue gas, our condensing technology achieves 107% more energy efficiency by using renewable energy to produce hot water.

Condensing technology

Premix Technology incorporates a modulation fan to perfectly combine combustion air and fuel before it reaches the burner (air/gas mixer), to ensure a high efficiency combustion.

With the combustion of 1 m³ natural gas, 1.7 kg of water vapour is released in the flue gas as latent heat. Instead of being disposed through the flue, the water vapour containing latent heat is then recirculated, and subsequently reheated by a uniquely designed exchanger.

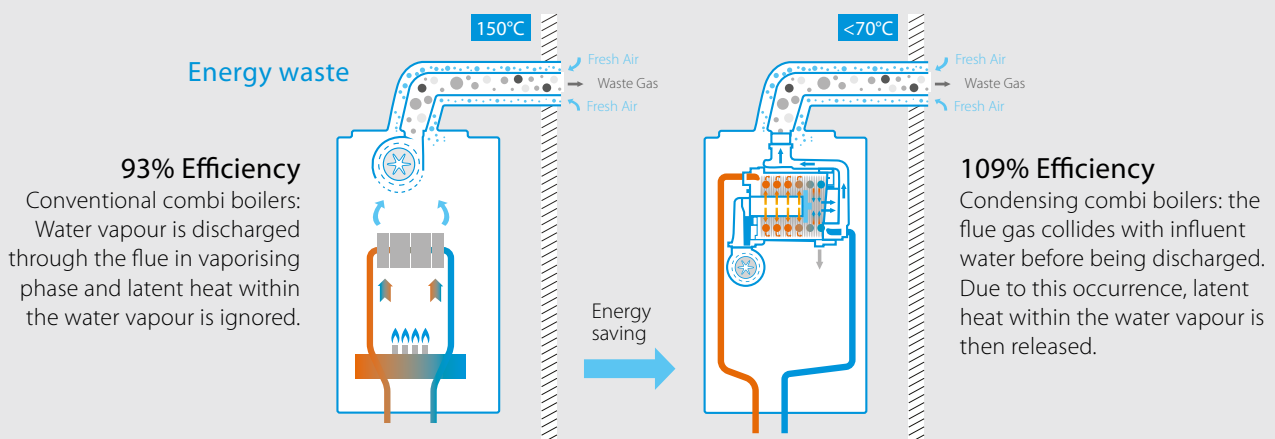
Condensation forms as a result of the water vapour being cooled to a temperature just below dew point, and subsequently drained via a siphon. The condensing technology uses optimum fuel efficiency, with reduced emissions of NO_x and CO, to ensure high cost savings and environmentally-friendly operation.



✓ Flexibility

Easy installation and service

All parts are accessible from the front and are low maintenance. The flue gas installation can be adapted to all kinds of configuration thanks to its flexibility.



Daikin Altherma 3 C Gas W

Wall mounted gas condensing boiler

Why choose the Daikin gas condensing boiler?

Low weight

27 kg

Connectivity/Cloud Service

Always in control, no matter where you are.

Easy installation and service

All parts are accessible from the front.
The gas-adaptive combustion system (Lambda Gx) means lower maintenance and installation time in a minimalist space.
The Lambda Gx is compatible with wall mounted and floor standing units.

Solar thermal connection

Usable in combination with solar thermal store (renewable energy)
› Combi boiler: solar preheating
› Heating only boiler: solar controller input

Most compact

12, 18, 24 kW: 400 x 255 x 580 mm
28, 35 kW: 450 x 288 x 666 mm

Flexible in use

Thanks to IPX5D standard and its compact dimensions, it's possible to install in nearly all room conditions, such as kitchen cupboards, bathroom, utility room, heating room, balcony (in-wall kit).

Modulation 1:8

Capacity adapts to required heat of 4 to 28 kW and 5 to 35 kW

Daikin eye

Monitor the operating status of your combi boiler with the Daikin Eye

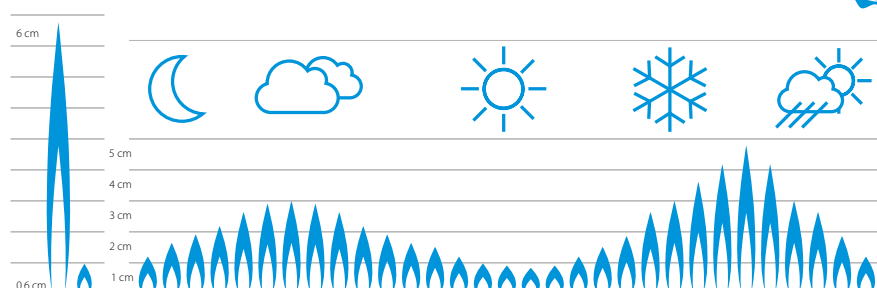
Unique interface

- › Stylish interface appeals to all end-users
- › State-of-the-art technology meets user-friendly design
- › The side details and convex front panel deliver an integrated view



High modulation rate


The opportunity to adjust the burner power ensures the seamless and continuous operation of the device. Smooth functioning of the system means increased comfort, a low risk for system failure and the ability to neutralise harmful substance emissions that may occur during ignition. Modulation is also automatically provided by the electronic control.





✓ Lambda Gx: automatic gas adaptation system

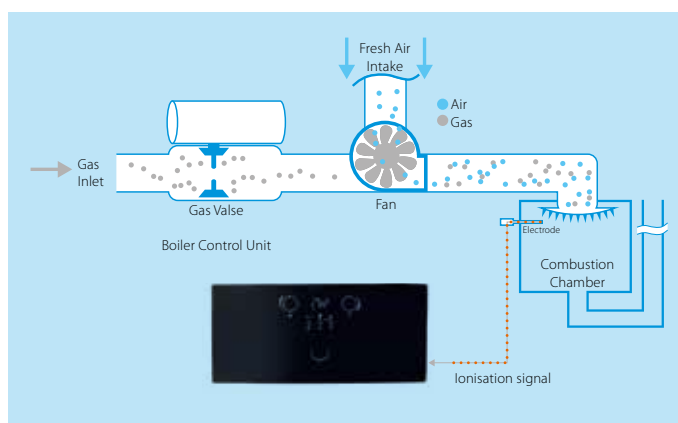With the Lambda GX, the correct combination of air and gas is regulated to achieve efficient combustion, which leads to higher cost savings and less installation and adjustment effort. With Lambda Gx, you have the advantage that you need no other parts like a gas cover to change from natural gas (NG) to liquid gas (LPG).



Boilers

✓ Daikin Eye

You can monitor the operating status of your combi boiler with the Daikin Eye



Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.

✓ Product features

Flue Adapter 60/100

- › Factory mounted
- › Compatible with top adapters/elbows of different flue gas manufacturers
- › With measurement wholes for air and flue gas

Heat Exchanger

- › Daikin design
- › Material: Aluminium
- › Modulation:
12-18-24 kW (1:4 - 1:6 - 1:8)
28-35 kW (1:4 - 1:7)

Expansion Vessel

- › Integrated
- › 12-18-24 kW: 8 liters
28-35 kW: 10 liters
- › **Gas Valve**
- › Less maintenance needed
- › Automatic gas adaptive system
- › No additional parts/tools for changing from NG to LPG.

Domestic Hot Water Plate Heat Exchanger

Increased number of plates to provide faster hot water production at high efficiency including warm start function.

Pump & Return Hydroblock

Includes filter and flow restrictor
Air vent, drain tap and Internal bypass
Low energy pump

Fan

Wide modulation range
Low noise

✓ Small gas condensing combi boiler

The smallest Combi boiler
(12-18-24 kW)



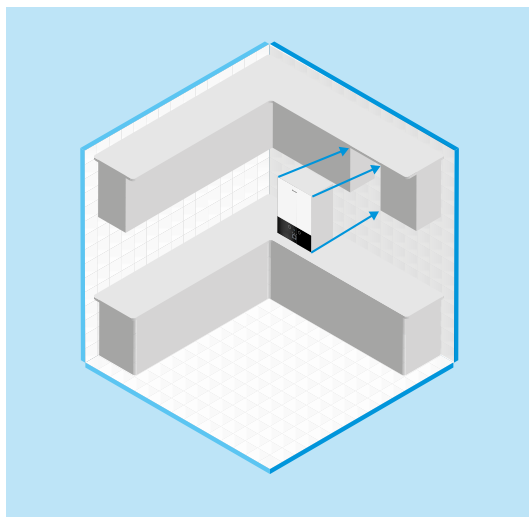
reddot award 2018
winner

Lightweight Combi boiler
(28-35 kW)




Easy installation & maintenance

The small and lightweight combi boiler guarantees fast installation, minimal maintenance and a flexible system to adapt to various rooms.



High energy class

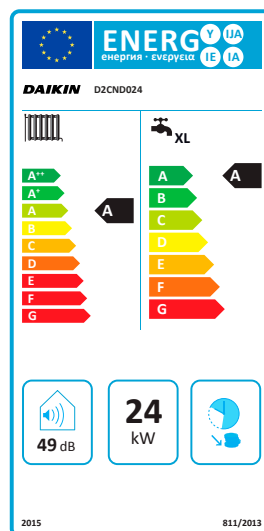
Energy Class A adheres to European ERP Standards



Silence

Sound power: 49 db(A): The sound power is the sound level heard when you are close to the unit. The sound level is similar to heating a dishwasher operating in an adjacent room.

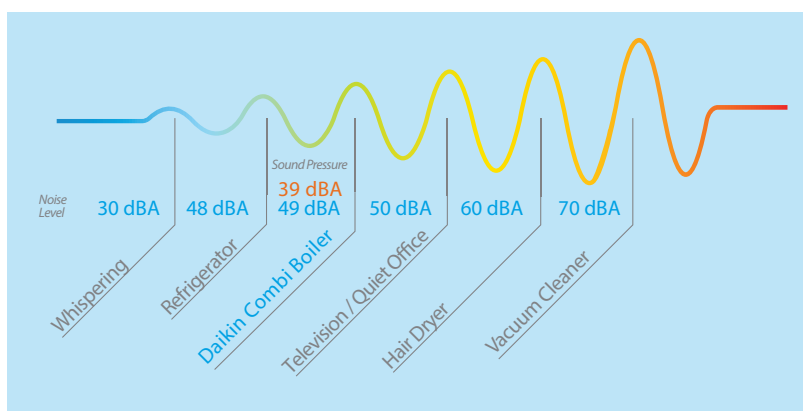Sound Pressure: 39 db(A): The sound pressure is the sound level heard when you are standing 1 meter from the unit. The sound level is akin to the quiet environment of a library.





Best for your home with compact dimensions



Capacity

T-Model: 12-18-24-28-35 kW
C-Model: 24-28-35 kW



Modulation

The device can drop down to 3 kW with a modulation ratio of 1:8. This ensures minimal energy is consumed during start/stop operations.



Full condensation

Latent heat from the flue gas is obtained and added to the system, leading to both increased efficiency and energy savings.



Comfort mode

The DK combi boiler is designed to provide optimal comfort levels.



Electrical Protection

Safe combi boiler with a protection class of IP5D.



Efficiency

Achieves up to 109% efficiency with full condensation.



Frequency controlled pump

The frequency control monitors power consumption to boost efficiency and save energy.



Quiet

Delivers a very low sound level that reflects the new EU standards.



Thermo regulation

The device runs the system based on data obtained from the outside temperature sensor and room thermostat.



Compact size

Measuring only 0.06 m³, this slim, state-of-the-art design combines power with aesthetics.



High energy class

Efficiency class according to EU Ecodesign Lot1. (A)



Lambda Gx system

Superior combustion technology delivers unparalleled efficiency and energy savings.



Premix combustion

Achieves an efficient combustion process by creating the perfect combination of air and gas before it reaches the burner.



Lcd display

Eye-catching and user-friendly design.



Double heat exchanger

The device uses a Daikin-specific main exchanger equipped with in-house technology and a stainless steel domestic water exchanger.



Easy maintenance

Details in design allows for easy maintenance.



Online controller via app


Control your indoor unit from any location via app (optional WLAN adapter)

Gas condensing boiler


Supremely compact gas condensing boiler

- › Very compact unit and flexible in use: possible to install in nearly all room conditions (inside the house as well as outside) thanks to freeze protection for water piping
- › Easy to service: all parts are accessible by only removing the front panel
- › High heating efficiency up to 108%
- › High modulating range 1:8 : the capacity is adapted based on the required heat load of the house from 3 to 24 kW and 5 to 35 kW
- › Combine it with solar heating for even better energy efficiency
- › C-model: The combi model means that the boiler has a plate heat exchanger to provide instant domestic hot water.
- › T-model (tank): The tank model means that the boiler does not have a plate heat exchanger. Domestic hot water is provided by an external storage tank heated by the boiler.
- › A1 model means that the filling loop is internal.
- › A4 model means that the filling loop is external.



Indoor unit				D2	TND012A4A	TND018A4A	TND024A4A	TND028A4A	TND035A4A	CND024A1A	CND028A4A	CND035A1A
Central heating	Heat input Qn (net calorific value)	Nom	Min/Max	kW	2.9/11.2	2.9/17.0	2.9/23.5	4.8/27	4.8/34	2.9/23.5	4.8/27	4.8/34
	Heat input Qn (gross calorific value)	Nom	Min/Max	kW	3.2/12.4	3.2/18.9	3.2/26.1	5.3/30	5.3/37.8	3.2/26.1	5.3/30	5.3/37.8
	Output Pn at 80/60°C	Min/Nom		kW	2.8/10.9	2.8/16.6	2.8/22.8	4.6/26.3	4.6/33.2	2.8/22.8	4.6/26.3	4.6/33.2
	Output Pnc at 50/30°C	Min/Nom		kW	3.1/12.0	3.1/18.0	3.1/24.0	5.2/28.2	5.2/35	3.1/24.0	5.2/28.2	5.2/35
	Water pressure (PMS)	Max		bar	3							
	Water temperature	Max		°C	100							
	Efficiency	Net calorific value		%	98.6	98.2	97.9	98.2	97.9	-	-	
	Operation range	Min/Max		°C	30/80							
	Piping connections				19 (3/4") Male							
	Domestic hot water	Heat input Qnw (net calorific value)	Nom	Min/Max	kW	2.9/11.2	2.9/17.0	2.9/23.5	4.8/29.5	4.8/34	2.9/23.5	4.8/29.5
Domestic hot water	Heat input Qnw (gross calorific value)	Nom	Min/Max	kW	3.2/12.4	3.2/18.1	3.2/26.1	5.3/32.7	5.3/37.7	3.2/26.1	5.3/32.7	5.3/37.7
	Domestic hot water threshold			l/min	-							
	Temperature	Factory setting		°C	50							
	Operation range	Min/Max		°C	35/60							
	Piping connections			mm	19 (3/4") Male							
	Connection diameter for heat flow and return			mm	12.7 (1/2") Male							
Gas	Connection diameter			mm	19 (3/4") Male							
	Gas connection diameter			mm	19 (3/4") Male							
	Consumption (G20)	Min/Max		m³/h	0.31/1.18	0.31/1.80	0.31/2.48	0.51/2.89	0.51/3.63	0.31/2.48	0.51/2.89	0.51/3.63
	Consumption (G25)	Min/Max		m³/h	0.36/1.38	0.36/2.09	0.36/2.89	0.59/3.32	0.59/4.19	0.36/2.89	0.59/3.32	0.59/4.19
	Consumption (G31)	Min/Max		m³/h	0.12/0.46	0.12/0.69		0.2/1.1	0.2/1.38	0.12/0.96	0.2/1.1	0.2/1.38
Supply air	Connection			mm	100							
	Concentric				1							
Flue gas	Connection			mm	60							
	Space heating	General	ns (Seasonal space heating efficiency)	%	93							
			Seasonal space heating eff. class		A							
	Domestic hot water heating	General	Declared load profile		-					XL		
			ηwh (water heating efficiency)	%	-					85		83
			Water heating energy efficiency class		-					A		
Casing	Colour				Titanium White (Ral9003)							
	Material				Sheet metal		Powder painted galvanised steel plate 690x440x295		Sheet metal	Powder painted galvanised steel plate 690x440x295		
Dimensions	Unit	Height x Width x Depth	Casing	mm	590x400x256				590x400 x256			
Weight	Unit	Empty		kg	27		36		27	37		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230		1~/50/230		1~/50/230			
Electrical power consumption	Max.			W	86		92	112	86	92	112	
	Standby			W	3.5		2.7		3.5	2.7		

Options


Category		Description	Material Nr
Controls		Outdoor sensor	150042
		Solar Temperature Sensor	DRSLRTESENSAA
		Daikin OT+ room thermostat	DOTROOMTHEAA
		Communication gateway	DRGATEWAYAA
System control - Cascade		Cascade Controller (E8.5064 V1)	DRCASCACONTAA
		Zone Controller (E8.1124)	DRZONECCONTAA
		CoCo OT-CAN Adapter	DRCOCOADPTAA
		Lago CAN BUS room thermostat	DRCBROOMTHEAA
		Flow temperature sensor (Cascade)	DRFLWTESENSAA
		Outdoor temperature sensor (Cascade)	DRODRTESENSAA
		Storage Tank Temperature Sensor (Cascade)	DRSTKTESENSAA
Flue gas		Connector Elbow PP 60/100 + MP(0mm)	DRMEEA60100BA
		Twin Box Adapter 80/80 + MP(0mm)	DRDECOP8080BA
		Vert. Conn. 60/100-80/125 + MP(0mm)	DRDECO80125BA
Mechanical		Cover plate (12-18-24 kW)	DRCOVERPLATAA
		Cover plate (28-35 kW)	DRCOVERPLA2AA
		Antifreezing set	DRANTIFREEZAA
Valve kit		Valve Kit C1 - 90° valves	DRVALVEKIC1AA
		Valve Kit C2 - 90° valves	DRVALVEKIC2AA
		Valve Kit T1 - 90° valves	DRVALVEKIT1AA
		Valve Kit T2 - 90° valves	DRVALVEKIT2AA
Pump Groups & Other		Seperator for mud and magnetit	SAS1 156021
		Seperator for mud and magnetit	IT.DEFANG-TP
		Seperator for mud and magnetit	IT-DEFANG-OT
		Unmixed Pump Group	DRUPUMPGRUPAA
		Mixed Pump Group	DRMPUMPGRPAA
For service		Service box	DRSERVCBOX1AA



Gas condensing boiler

High efficiency gas condensing boiler for heating and hot water

- › High efficiency gas condensing boiler
- › Top efficiency gas condensing boiler thanks to labyrinth fin heat exchanger for improved heat exchange
- › Low running costs for both heating and hot water thanks to new dual heat exchanger
- › Maximum heating comfort and domestic hot water when it is most needed
- › Quick, easy and compact installation thanks to our optional pre-assembled B-pack, containing all auxiliary components



Indoor unit				EHOB(G)	12A	18A	12AH	18AH	42AH
Central heating	Heat input Qn (net calorific value)	Nom	Min/Max	kW	3.5/12.5	5.6/18.7	3.5/11.8	5.6/18.7	7.8/42.5
	Heat input Qn (gross calorific value)	Nom	Min/Max	kW	3.9/13.9	6.2/20.8	3.9/13.1	6.2/20.8	7.8/42.5
	Output Pn at 80/60°C	Min/Nom		kW	-/12.2	-/17.8	3.4/11.5	5.4/17.8	-/40.9
	Output Pnc at 50/30°C	Min/Nom		kW		-/-	3.8/12.0	5.9/18.1	8.4/-
	Output at 40/30°C	Min		kW		-	3.8	6.0	-
	Water pressure (PMS)	Max		bar	3	-		3	
	Water temperature	Max		°C		-		90	
	Efficiency	Net calorific value		%	109			107	
Gas	Operation range	Min/Max		°C			30/90		
	Connection	Diameter		mm			15		
	Consumption (G20)	Min/Max		m³/h	0.36/1.30	0.58/1.94	0.36/1.22	0.58/1.94	0.81/4.41
	Consumption (G25)	Min/Max		m³/h	0.42/1.50	0.67/2.25	0.42/1.42	0.67/2.25	0.94/5.10
Supply air	Consumption (G31)	Min/Max		m³/h	0.14/0.49	0.22/0.74	0.14/0.47	0.22/0.74	0.31/1.68
	Connection			mm			100		
	Concentric						1		
Flue gas	Connection			mm			60		
Space heating	General	ηs (Seasonal space heating efficiency)		%	94	93	94	93	92
			Seasonal space heating eff. class		A				
Casing	Colour	White - RAL9010							
	Material	Precoated sheet metal							
Dimensions	Unit	HeightxWidthxDepth	Casing	mm	590x450x240		710x450x240		
Weight	Unit	Empty		kg	28				
Power supply	Phase/Frequency/Voltage			Hz/V	-/50/230				
Electrical power consumption	Max.				80		135		
	Standby				2				

Indoor unit				EKOMB(G)	22AH	28AH	33AH	22A	28A	33A
Central heating	Heat input Qn (net calorific value)	Nom	Min/Max	kW	5.6/18.7	7.1/23.7	7.2/27.3	5.5/23.3	7.2/29.1	7.5/32.7
	Heat input Qn (gross calorific value)	Nom	Min/Max	kW	6.2/20.8	7.9/26.3	8.0/30.3	6.1/25.9	8.0/32.3	8.3/36.3
	Output Pn at 80/60°C	Min/Nom		kW	-/17.8	-/22.8	7.1/26.3	5.4/22.7	7.1/28.4	7.4/32.1
	Output Pnc at 50/30°C	Min/Nom		kW		-/-	7.8/27.1	5.9/23.8	7.7/31.1	8.2/35.0
	Output at 40/30°C	Min		kW		-	7.7	5.9	7.7	8.2
	Water pressure (PMS)	Max		bar	3		-		3	
	Water temperature	Max		°C		-			90	
Domestic hot water	Efficiency	Net calorific value		%			107			109
	Heat input (net calorific value) Qnw	Nom	Min/Max	kW	5.6/22.1	7.1/28.0	-/-	5.5/23.3	7.2/29.1	7.5/32.7
	Heat input (gross calorific value) Qnw	Nom	Min/Max	kW	6.2/24.6	7.9/31.1	-/-	6.1/25.9	8.0/32.3	8.3/36.3
	Output	Min/Nom		kW	-/-			5.9/22.7	7.7/28.4	8.2/32.1
	Domestic hot water threshold			l/min	1.5		-	1.5		
	Water flow	Rate	Nom	l/min	10.0 (1) / 6.0(2)	12.5 (1) / 7.5(2)	-	10.0 (1) / 6.0(2)	12.5 (1) / 7.5(2)	15.0 (1) / 9.0(2)
	Temperature	Factory setting		°C			60			
Gas	Operation range	Min/Max		°C	40/65			-/-		
	Connection	Diameter		mm	15		-	15		
	Consumption (G20)	Min/Max		m³/h	0.58/2.29	0.74/2.46	-/-	0.57/2.42	0.75/3.02	0.78/3.39
	Consumption (G25)	Min/Max		m³/h			-/-	0.66/2.80	0.86/3.50	0.80/3.93
Supply air	Consumption (G31)	Min/Max		m³/h	0.22/0.87		-/-	0.22/0.92	0.28/1.15	0.30/1.29
	Connection	Concentric		mm	100		-	100		
Flue gas	Connection			mm	60		-	60		
Space heating	General	ηs (Seasonal space heating efficiency)		%			93			94
		Seasonal space heating eff. class			A					
Domestic hot water heating	General	Declared load profile			L	XL		L	XL	
		ηwh (water heating efficiency)		%	84	87		84	87	-
		Water heating energy efficiency class			A					
Casing	Colour				White - RAL9010		-	White - RAL9010		
	Material				Precoated sheet metal		-	Precoated sheet metal		
Dimensions	Unit	Height x Width x Depth	Casing	mm	590x450x240	650x450x240	-x-x-	590x450x240	650x450x240	710x450x240
Weight	Unit	Empty		kg	30	33	-	30	33	36
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230					
Electrical power consumption	Max.			W	80					
	Standby			W	2					

(1) Setpoint 40°C (2) Setpoint 60°C

Options

	Type	Material name	Condensing boilers							
			Combi 22kW TOP Grade	Combi 22kW HIGH Grade	EKOMB* Combi 28kW TOP Grade	Combi 28kW HIGH Grade	Combi 33kW	H/O 12kW	EHOB* H/O 18 kW	H/O 42kW
Controls	Rf-wlan converter	EKRFLAN1A	•	•	•	•	•	•	•	•
	Dongle set	EKDS1A	•	•	•	•	•	•	•	•
Installation	Cover plate 35	EKCP1A	•	•	•	•	•	•	•	•
	Solar water heater connection set	EKSH1A	•	•	•	•	•	•	•	•
Sensor	Outdoor sensor	EKOSK1A	•	•	•	•	•	•	•	•
Valve	Valve kit (IT, ES, CZ, GR, PL, PT)	EKVK4A	•	•	•	•	•	•	•	•
	Valve kit (DE)	EKVK5A						•	•	
	Valve kit (DE)	EKVK6A	•	•	•	•	•			
	Valve kit 3-way	EK3WV1A	•	•	•	•	•	•	•	•
B-pack	B-pack for combi (IT, ES, CZ, GR, PL, PT)	EKFJS1A	•	•				•	•	
	B-pack for combi (IT, ES, CZ, GR, PL, PT)	EKFJM1A			•	•				
	B-pack for combi (IT, ES, CZ, GR, PL, PT)	EKFJL1A					•			•
	B-pack for combi (FR, BE)	EKFJS2A	•	•						
	B-pack for combi (FR, BE)	EKFJM2A			•	•				
	B-pack for combi (FR, BE)	EKFJL2A					•			•
	B-pack for combi (UK)	EKFJS3A	•	•						
	B-pack for combi (UK)	EKFJM3A			•	•				
	B-pack for combi (UK)	EKFJL3A					•			
	B-pack for combi (DE)	EKFJS4A						•	•	
	B-pack for combi (DE)	EKFJS6A	•	•						
	B-pack for combi (DE)	EKFJM6A			•	•				
	B-pack for combi (DE)	EKFJL6A					•			
Propane set		EKHY075787	•							
		EKPS075867				•	•			•
		EKPS075877	•							
		EKPS075917						•		
Conversion set		EKPS076197						•		
		EKPS076207	•						•	
		EKPS076217		•	•				•	
		EKPS076227		•			•			•
Flue gas	Flue gas non return flap (flue gas cascade)	EKFGF1A	•	•	•	•	•	•	•	•
	Horizontal straight flue terminal (low profile) (UK)	EKFGP1A	•		•		•			
Others	Concentric connection (Ø 80/125)	EKHY090717								
	Eccentric connection (Ø 80)	EKHY090707								
	Adaptor set concentric 60/100	EKAS1A	•	•	•	•	•			

Daikin Altherma C Gas ECH₂O

Floor standing gas condensing boiler

Combines modern gas condensing technology with a thermal store

Why choose the Daikin floor standing boiler?

The unit combines modern gas condensing technology with a pressure less thermal store. Customers achieve the highest heating comfort, maximum water hygiene and a small installation footprint.



Multifaceted

Combine with solar and another heat source

Highest hygiene

Complies with superior standards for water sanitation

Connectivity

Features a wireless connection

High DHW Tapping Profile

(3xx = L) and (5xx = XL)

Attractive design

Compact measurements

3xx: 595 x 615 x 1896 mm

5xx: 790 x 790 x 1896 mm



High efficiency

Delivers over 107% more energy efficiency with ISM/Smart Start Function

Easy installation and service

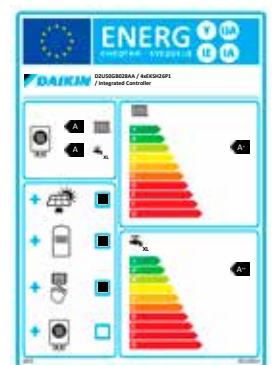
Lambda Gx

Fully electronic and accessible gas-air combination

Energy efficiency

All models reach the energy label A

For example:
D2U50GB028AA /
4xEKSH26P1 / Integrated
controller



Benefits

- › Thermal store with hygienic fresh water technology
- › Space-saving design: gas boiler and hygienic thermal store are combined in one device
- › Future-proof and flexible: direct combination with a solar system is possible and can be added any time
- › Highest heating comfort is customised for your home
- › Power output 500 kW to 28 kW through Intelligent Storage Management (ISM)



Technological advantage



Health

Integrated thermal storage with hygienic fresh water technology



More space for living

Small footprint while combining a condensing boiler and a thermal store



Fit for the future

Hybrid system. The efficient thermal store can be used with additional heat generators

Gas condensing boiler













Combining modern gas condensing technology
with a thermal store in a floor standing application

- › Space-saving gas condensing boiler with integrated heat / solar storage
- › Auto Adaptive Lambda Gx combustion technology for all gas types
- › Universal use thanks to intelligent store management and a power output of 0.5 - 28 kW
- › High heat and DHW comfort with integrated ECH₂O Thermal store: fresh water hygiene technology
- › Easy integration of thermal solar and a further additional heat generator
- › Note: Solar controller (shown on picture) is an option, not standard on boiler



				D	2U30GC015A	2U30GC020A	2U50GC015A	2U50GC020A	2U50GC024A	2U50GC028A
Central heating	Heat input Q _n (net calorific value)	Nom	Min/Max	kW	3.0/15.0	3.0/20.0	3.0/15.0	3.0/20.0	4.0/24.0	4.0/28.0
	Heat input Q _n (gross calorific value)	Nom	Min/Max	kW	3.3/16.7	3.3/22.2	3.3/16.7	3.3/22.2	4.4/26.6	4.4/31.1
	Output P _n at 80/60°C	Min/Nom		kW	2.9/14.6	2.9/19.5	2.9/14.6	2.9/19.5	3.9/23.4	3.9/27.2
	Output P _n at 50/30°C	Min/Nom		kW	3.2/15.7	3.2/20.9	3.2/15.7	3.2/20.9	4.3/25.0	4.3/29.1
	Water pressure (PMS)	Max		bar	3					
Domestic hot water	Water temperature	Max		°C	90					
	Operation range	Min/Max		°C	10/90					
	Heat input (net calorific value) Q _{nw}	Nom	Min/Max	kW	3.0/15.0	3.0/20.0	3.0/15.0	3.0/20.0	4.0/24.0	4.0/28.0
	Heat input (gross calorific value) Q _{nw}	Nom	Min/Max	kW	3.3/16.7	3.3/22.2	3.3/16.7	3.3/22.2	4.4/26.6	4.4/31.1
	Output	Min/Nom		kW	3.0/15.0	3.0/20.0	3.0/15.0	3.0/20.0	4.0/24.0	4.0/28.0
Piping connections	Temperature	Factory setting		°C	58					
	Operation range	Min/Max		°C	10/85					
	Cold in-Hot out			Inch	G 1" (male)					
	Connection	Diameter		mm	20					
	Consumption (G20)	Min/Max		m ³ /h	0.32/1.59	0.32/2.11	0.32/1.59	0.32/2.11	0.42/2.54	0.42/2.96
Gas	Consumption (G25)	Min/Max		m ³ /h	0.35/1.75	0.35/2.33	0.35/1.75	0.35/2.33	0.47/2.80	0.47/3.26
	Consumption (G31)	Min/Max		m ³ /h	0.16/0.62	0.16/0.82	0.16/0.62	0.16/0.82	0.27/0.98	0.27/1.15
	Connection			mm	100					
	Concentric			mm	1					
	Connection			mm	60					
Flue gas	Piping connections			Inch	G 1" (female)					
Water circuit	General	ns (Seasonal space heating efficiency)		%	91	92	91	92	92	92
Space heating	General	Seasonal space heating eff. class			A					
Domestic hot water heating	General	Declared load profile			L					
	General	n _{wh} (water heating efficiency)		%	81	81	89	82	84	82
	General	Water heating energy efficiency class			A					
	Casing	Colour			Traffic white (RAL9016) / Dark grey (RAL7011)					
	Casing	Material			-					
Dimensions	Unit	HeightxWidthxDepth	Casing	mm	1,895x595x615					
Weight	Unit	Empty		kg	76					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230					
Electrical power consumption	Max.			W	76	98	76	98	104	108
Standby				W	3					
Drain-back solar	Piping connections	solar-flow		Inch	G 1" (female)					
				D	2U30GB015A	2U30GB020A	2U50GB015A	2U50GB020A	2U50GB024A	2U50GB028A
Central heating	Heat input Q _n (net calorific value)	Nom	Min/Max	kW	3.0/15.0	3.0/20.0	3.0/15.0	3.0/20.0	4.0/24.0	4.0/28.0
	Heat input Q _n (gross calorific value)	Nom	Min/Max	kW	3.3/16.7	3.3/22.2	3.3/16.7	3.3/22.2	4.4/26.6	4.4/31.1
	Output P _n at 80/60°C	Min/Nom		kW	2.9/14.6	2.9/19.5	2.9/14.6	2.9/19.5	3.9/23.4	3.9/27.2
	Output P _n at 50/30°C	Min/Nom		kW	3.2/15.7	3.2/20.9	3.2/15.7	3.2/20.9	4.3/25.0	4.3/29.1
	Water pressure (PMS)	Max		bar	3					
Domestic hot water	Water temperature	Max		°C	90					
	Operation range	Min/Max		°C	10/90					
	Heat input (net calorific value) Q _{nw}	Nom	Min/Max	kW	3.0/15.0	3.0/20.0	3.0/15.0	3.0/20.0	4.0/24.0	4.0/28.0
	Heat input (gross calorific value) Q _{nw}	Nom	Min/Max	kW	3.3/16.7	3.3/22.2	3.3/16.7	3.3/22.2	4.4/26.6	4.4/31.1
	Output	Min/Nom		kW	3.0/15.0	3.0/20.0	3.0/15.0	3.0/20.0	4.0/24.0	4.0/28.0
Piping connections	Temperature	Factory setting		°C	58					
	Operation range	Min/Max		°C	10/85					
	Cold in-Hot out			Inch	G 1" (male)					
	Connection	Diameter		mm	20					
	Consumption (G20)	Min/Max		m ³ /h	0.32/1.59	0.32/2.11	0.32/1.59	0.32/2.11	0.42/2.54	0.42/2.96
Gas	Consumption (G25)	Min/Max		m ³ /h	0.35/1.75	0.35/2.33	0.35/1.75	0.35/2.33	0.47/2.80	0.47/3.26
	Consumption (G31)	Min/Max		m ³ /h	0.16/0.62	0.16/0.82	0.16/0.62	0.16/0.82	0.27/0.98	0.27/1.15
	Connection			mm	100					
	Concentric			mm	1					
	Connection			mm	60					
Flue gas	Piping connections			Inch	G 1"					
Water circuit	General	ns (Seasonal space heating efficiency)		%	91	92	91	92	92	92
Space heating	General	Seasonal space heating eff. class			A					
Domestic hot water heating	General	Declared load profile			L					
	General	n _{wh} (water heating efficiency)		%	81	81	89	82	84	82
	General	Water heating energy efficiency class			A					
	Casing	Colour			Traffic white (RAL9016) / Dark grey (RAL7011)					
	Casing	Material			-					
Dimensions	Unit	HeightxWidthxDepth	Casing	mm	1,895x595x615					
Weight	Unit	Empty		kg	78					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230					
Electrical power consumption	Max.			W	76	98	76	98	104	108
Standby				W	3					
Drain-back solar	Piping connections	solar-flow		Inch	G 1"					

Gas condensing/solar combination

		Regulation accessories	Type	Order No.
Room controller		Convenience controller with wall-mounting for use as a) A remote control (external equipment controller) b) Mixer unit (additional or standalone) c) Room thermostat for heat exchanger	RoCon U1	15 70 34
Mixer module		Controller for mixer valve with speed-controlled high-efficiency pump including mixer circuit sensor a) in combination with an equipment controller (RoCon B1). Mixer parameters adjustable via the heat generator. b) in combination with room controller (RoCon U1) 1. can be used as a standalone solution 2. can be integrated in the system via BUS	RoCon M1	15 70 68
Outdoor temperature sensor for RoCon convenience regulation		In conjunction with the mixer controller RoCon M1 when it is used as a zone or as a stand-alone solution	RoCon OT1	15 60 70
Gateway		For coupling the controller to the Internet for remote control the heat source via Mobile Phones (APP) .	RoCon G1	15 70 70 (Daikin brand)
Gateway		For coupling the controller to the Internet for remote control the heat source via Mobile Phones (APP) .	RoCon G1	15 70 56 (Rotex brand)
Flue-gas kit GCU compact		Double-walled connection set of 2x45° elbows with connection extender from DN60 / 100 to DN80 / 125.	Set GCU1	15 50 79.17
Double-walled test adapter DN 60/100		Accessories if no standard flue gas connection (Set GCU 1) is used.	D6 PA	24 60 11
Single-walled test adapter DN 60		Accessories for room-air independant operation if no standard flue gas connection (Set GCU 1) is used.	E6 PA	24 60 12
Pump Group with mixer		For a mixed heating circuit. Ready to plug in, in the thermal insulation case, with pressure controlled high-efficiency circulation pump, motor mixer, stops valves and temperature displays.		15 60 75
Pump group without mixer		For a mixed heating circuit. Ready to plug in, in the thermal insulation case, with PWMcontrolled high-efficiency circulation pump, motor mixer, stops valves and temperature displays.		15 60 77
Fittings kit for mixer group MK1/MK2		1" female thread x 1 1 / 2" flat-sealing.	VMK1	15 60 53
Convection brake		To prevent circulation under gravity in Sanicube water circuits with Drain-Back, 2 pcs., suitable up to 95 °C, for installation in any tank-side heat exchanger connections except pressure solar heat exchanger	SKB	16 50 70
Sludge and magnetite separator		Compact sludge separator with drain cock and thermal insulation. Input G1-IG (union nut), outlet G1-IG.	SAS1	15 60 21

Note: To avoid gravity circulation, in water circuits connected to the storage tanks, the installation of circulation brakes (for example, type SKB) is recommended. Please order separately if required.

Daikin Altherma C Oil

Bringing oil heating into the 21st century

Why choose the Daikin oil condensing boiler?




Higher efficiency

Daikin's oil condensing technology is a worthwhile investment

Choosing the right boiler for replacing your oil heating system is a long-lasting decision.. Over the years, the cost of fuel will largely exceed the boiler's initial purchase price. Therefore, this is where the Daikin Altherma C Oil can help you making the biggest savings.


The Daikin Altherma C Oil reaches the maximum efficiency labels

All Daikin products are tested and proven to meet criteria set by the EU Ecodesign Directive. We guarantee our individual products and packaged solutions offer maximum convenience, while upholding the highest safety standards.



Advanced oil heating system

The modern Daikin Altherma C Oil will fit seamlessly into your home. Its condensing technology minimizes emissions, is very easy to operate and converts fuel into available heat with virtually no losses. The higher efficiency reduces oil consumption and allows for installing smaller oil storage tanks, which are fitted with odour barriers.



Best-in-class modulation range

A boiler with a wide modulation range

The heat demand of a building varies widely depending on weather conditions and utilisation patterns. The modulating A2 constantly adjusts its output in line with demand. This ensures optimum energy utilisation. It has a particularly large modulation range of 1:2,5. This can even be broadened to 1:64.



Go further with Intelligent Store Management

The Daikin Altherma C Oil can deliver 0-100 percent output to meet demand and provide continuous heat distribution in combination with Daikin's thermal stores. The thermal store volume serves as an active buffer also for space heating. Further optimisation is possible with ISM: even the lowest heat requirements of 500 watts or more can be covered, while producing as much hot water as you need. Frequent on/off switches are avoided by optimising the oil condensing boiler's burner runtimes. Fewer burner starts mean much lower emissions of harmful substances and increased energy efficiency.



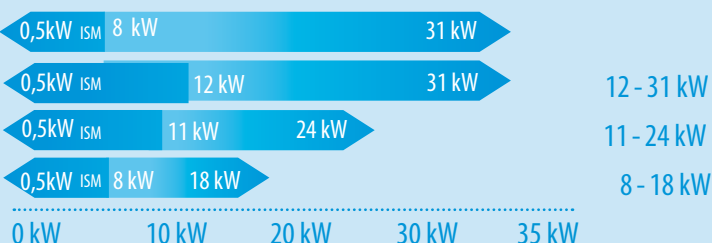
With this optimisation, the Daikin Altherma C Oil is well able to meet the steadily increasing need for a constant and immediate supply of hot water – especially with the trend for ever more luxurious bathrooms and multiple shower units in our homes, but decreasing heating requirements as building insulation improves.

Capacities Range

32 kW model


24 kW model

18 kW model



Fit for any replacement

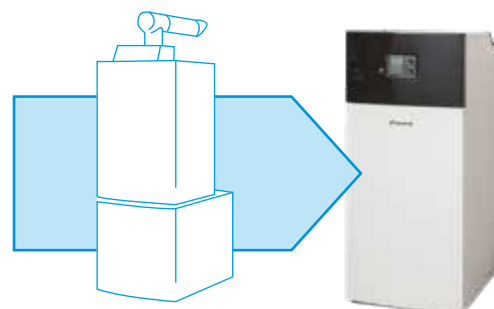The Daikin Altherma C Oil is ideally suited to replace older boilers, thanks to the great flexibility it offers when integrated into existing systems, plus its low weight and compact dimensions.



How you can benefit from the Daikin Altherma C Oil



Outstanding efficiency

- › Energy saving condensing technology
- › Optimum heat transfer due to innovative flue gas turbulators in the boiler body



Space saving

- › Small installation area of 0,42 m²
- › Oil tanks designed to site safely beside the boiler



Innovative technology

- › Next generation modulating burner (1:2.5)
- › ISM offers modulation of 1:64 from 0,5 to 32 kW and intelligent storage management
- › Intuitively operated electronic control unit
- › Ready for bio-oil (B10) and all commercially available fuel oils



Meets your needs

- › Ideal for replacing an existing oil boiler
- › Straightforward chimney refurbishment
- › Easy maintenance
- › Odour-proof flexible pipes prevent the smell of fuel oil
- › If used with a Daikin thermal store, possibility of direct combination with our solar thermal system or woodburning stove with back boiler

D9HA2-A - Daikin Altherma C Oil

Oil condensing boiler



D9HA2-A



Indoor unit					9HA2032A	9HA2018A	9HA2024A
Central heating	Heat input Q _{in} (net calorific value)	Nom	Min/Max	kW	12.8 /32.2	8.5 /18.2	10.9 /24.7
	Heat input Q _{in} (gross calorific value)	Nom	Min/Max	kW	13.6 /34.1	9.0 /19.3	11.6 /26.2
	Output P _n at 80/60°C	Min/Nom		kW	12.5 /31.4	8.3 /17.7	10.6 /24.1
	Water pressure (PMS)	Max		bar	3		
	Water temperature	Max		°C	85		
Supply air	Connection			mm	125		
	Concentric				1		
Space heating	General	η _{sp} (Seasonal space heating efficiency)		%	93	91	92
		Seasonal space heating eff. class			A		
Casing	Colour				White + Black		
	Material				Aluminium		
Dimensions	Unit	H x W x D	Casing	mm	1,360x606x754		
Weight	Unit	Empty		kg	111	97	102
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230		



Options

		Accessories	Order No.
Room controller RoCon U1		Convenience controller with wall-mounting for use as: a) A remote control (external equipment controller) b) Mixer unit (additional or standalone) c) Room thermostat for heat exchanger	15 70 34
Mixer module RoCon M1		Controller for mixer valve with speed-controlled high-efficiency pump including mixer circuit sensor a) in combination with an equipment controller (RoCon B1). Mixer parameters adjustable via the heat generator. b) in combination with room controller (RoCon U1) 1. can be used as a standalone solution 2. can be integrated in the system via BUS	15 70 68
Outdoor temperature sensor RoCon OT1 for RoCon convenience regulation		In conjunction with the mixer controller RoCon M1 when it is used as a zone or as a stand-alone solution.	15 60 70
Gateway RoCon G1		For coupling the controller to the Internet for remote control the heat source via Mobile Phones (APP)	15 70 56
Storage tank sensor for RoCon DT1 comfort control		Suitable for all A2 oil condensing boilers	15 60 68
Mixing PCB		Can be placed inside the boiler PCB. Same functions as external mixing module but without plastic cover (PCB only).	DRMIXINGPCBA
Flue gas Kit		To connect flue gas outlet on the bottom side of the boiler	DRFLUEGAKITA
Valve Kit		Content: 3WV with internal piping/connection valves to install inside housing to connect DHW storage tank	DRVALVEKITA2A
Smart start kit		Content: 2 mixing valves with internal piping/connection valves, flow sensor, additional temperature sensor. Kit can be installed inside housing. In combination with storage tank, this valve kit provides following functions: heating support, smartstart, electronical bypass, flow control, DHW/CH, thermal energy metering.	DRSMATAKITA
Internal expansion vessel		Content: 12 L expansion vessel including piping and holder to install kit inside casing	DREXPVES12A
Sludge and magnetite separator SAS1		Compact sludge separator with drain cock and thermal insulation. Input G1-IG (union nut), outlet G1-IG.	15 60 21
Water purification system Bambini		With mounting bracket and backflow preventer. For demineralisation of tap water. Fields of application are heating water, cooling water, battery water and rinsing technology. Operating pressure 2-8.6 bar, temperature range 4-30°C. For approx. 350L system volume. Not suitable for drinking water purification.	15 30 47
Replacement cartridge EK Bambini		Usable for water purification system Bambini	15 30 48
Cleaning brush			DRCLEANBRUSA











Accessories		Order No.	
Condensate box		Not needed in all cases. Depends on local regulation and used oil type. Based on that free decision who will use. Option, but will fit inside the unit	DRCONDENBOXA
Material refill: Granulate			DRCONDENREFA
Oil-bleeder TOP 2		With integrated filter (multiple filter) and block valve. Working overpressure max 0,7 bar, filter 20-35 µm, return flow max. 120 L/h.	15 60 79
Pump group		For a mixed and unmixed heating circuit. Pre-assembled, leakage tested and thermally insulated assembly group. Incl. temperature indicator and arrangeable gravity brake. With Grundfos pump UPM 3 hybrid 25 - 70/80. Pin G1, without PWM-cable. Pump group with mixer (DRMPUMPGRPAA) Pump group without mixer (DRUPUMPGRPAA)	15 60 75 15 60 77
Screwing set for the pump group		1 " IG x 1 1/2 " flat sealing	15 60 53
Heating circuit distributor 2-fold with integrated hydraulic diverter		A distributor which combines the function of a hydraulic diverter and a distributor. Applied in heating and air-conditioning systems, it enables the regulation of different lines. Separate lateral connections, incl. wall bracket and performed sound insulation. Combinable with pump group 15 60 75 or 15 60 77	15 60 78
Hydraulic separator HW2500		Low loss header HW2500 with performed insulation and drain valve, for vertical installation, input/output G1 IG (DN 25), with union nut, flow-rate up to 2,500L. Function: - Hydraulic separation - Ventilation - Sludge separation - Detachment of magnetic particles	15 60 25
Sludge and magnetite separator SAS2		Compact sludge separator with drain cock and thermal insulation. Input G1-IG.	15 60 23
Hydraulic diverter HWC - DN 125 for up to 3 heat generators		Consisting of DN 125 round pipe sub-divided into four zones (using perforated separator discs, length approx. 1550mm), equipped with 8 x heating circuit connections 1" male thread, and a 1 x 1/2" sleeve and standing foot. Max. permissible operating pressure: 6 bar, max. permissible temperature: 110 °C.	17 29 00
Thermal insulation WHWC for hydraulic diverter		Thermal insulation in accordance with EnEV, consisting of 60 mm PUR foam in a galvanised sheet steel casing.	17 29 01
VA-Oil feeding line		PEX-AL compound pipe as oil supply line approved by the building supervision authorities in the DIBT test. Test mark of the building supervision authority: Z-40.23-331. Thick-walled PEX inner pipe with butt-welded aluminium covering and silver-grey PE-external layer. Due to the aluminium covering 100% diffusion tightness. Neutral to heating oil, prevents degradation in the heating oil. Type of delivery: Ring coil packaged in box.	
VA Oil pipe		Ø 12 x 3	60 m 17 06 31
Screw connection VA-Oil		To connect the oil feed pipe VA-oil to the extraction armature and to the oil filter. Clamping ring screwed fitting made of brass or parts in contact with oil made of stainless steel. Suitable for VA-Oil pipe Ø 12 x 3, connecting thread 3 / 8" male thread. Test mark of the building supervision authority: Z-40.23-331	
Screw connection VA-Oil			10 pc. 17 80 13
Connect VA-Oil		10 m PEX-AL compound pipe as an oil-conveying line with two screwed connection fittings 12 x 3 - 3 / 8" male thread	10 m 17 06 32





Table of content

tanks

Thermal stores.....	144
Stainless steel tanks.....	146
Oil boiler DHW tank NEW	147

Thermal stores and tanks

Hot water heating installation solutions



Why choose a thermal store or domestic hot water tank

Whether you only need hot water or you want to combine your hot water with solar systems, we offer you the best solutions to the highest levels of comfort, energy efficiency and reliability.



✓ Domestic hot water tanks

Stainless steel tanks

Comfort

- › EKHTS-AC: available in 200 and 260l in stainless steel
- › EKHWS(U)-B: available in 150, 200 and 300 litres in stainless steel
- › EKHWS-B: available for 400V applications
- › EKHWS(U)-D: available in 150, 180, 200, 250 and 300 litres in stainless steel

Efficiency

- › High-quality insulation keeps heat loss to a minimum
- › Efficient temperature heating: from 10°C to 50°C in only 60 minutes
- › Available as an integrated solution or separate tank

Reliability

- › At necessary intervals, the unit can heat up water up to 60°C to prevent the risk of bacteria growth



The ECH₂O thermal store range

ECH₂O thermal store: additional hot water comfort

Combine your monobloc with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options


Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.

Efficiency


- › Fit for the future: maximise renewable energy sources
- › Intelligent Heat Storage Management: ensures continuous heating during defrost mode, and uses stored heat for space heating
- › High-quality insulation keeps heat loss to a minimum

Reliability

- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no water loss through the safety valve



Drain-back solar system



Pressurised solar system

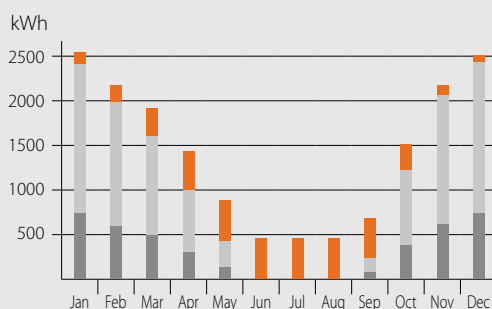
Pressureless (drain-back) solar system

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

Pressurised solar system

- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed


Monthly energy consumption of an average detached house



- Utilisation of solar energy for domestic hot water and central heating
- Heat pump (environmental heat)
- Auxiliary energy (electricity)

System diagram: Integrated solar unit

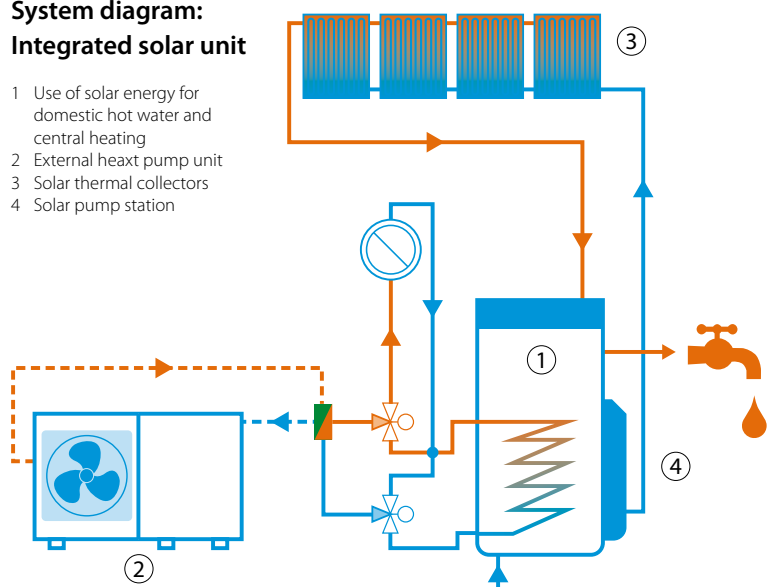- 1 Use of solar energy for domestic hot water and central heating
- 2 External heat pump unit
- 3 Solar thermal collectors
- 4 Solar pump station




Thermal store

Plastic domestic hot water tank with solar support

- › The thermal store EKHWP* is designed to work with Daikin Altherma heat pumps
- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options
- › Available in 300 and 500 liters




Accessory				EKHWP	300B	500B	300PB	500PB
Casing	Colour			Traffic white (RAL9016) / Dark grey (RAL7011)				
	Material			Impact resistant polypropylene				
Dimensions	Unit	Width	mm	595	790	595	790	
		Depth	mm	615	790	615	790	
		Height	mm	1,650	1,660	1,650	1,660	
Weight	Unit	Empty	kg	58	82	58	89	
 Tank	Water volume			l	294	477	294	477
	Material			Polypropylene				
	Maximum water temperature			°C	85			
	Insulation	Heat loss	kWh/24h	1.5	1.7	1.5	1.7	
	Energy efficiency class			B				
	Standing heat loss			W	64	72	64	72
	Storage volume			l	294	477	294	477
	Heat exchanger	Domestic hot water	Quantity		1			
Tube material			Stainless steel (DIN 1.4404)					
Face area			m²	5,600	5,800	5,600	5,900	
Internal coil volume			l	27.1	28.1	27.1	28.1	
Operating pressure			bar	6				
Average specific thermal output			W/K	2,790	2,825	2,790	2,825	
Charging			Quantity		1			
		Tube material		Stainless steel (DIN 1.4404)				
		Face area	m²	3	4	3	4	
		Internal coil volume	l	13	18	13	18	
		Operating pressure		bar	3			
		Average specific thermal output	W/K	1,300	1,800	1,300	1,800	
		Pressurised solar	Average specific thermal output	W/K	-		390.00	840.00
Auxiliary solar heating		Tube material		-		Stainless steel (DIN 1.4404)	-	Stainless steel (DIN 1.4404)
		Face area	m²	-		1	-	1
		Internal coil volume	l	-		4	-	4
		Operating pressure	bar	-		3	-	3
		Average specific thermal output	W/K	-		280	-	280

Domestic hot water tank

Plastic domestic hot water tank with solar support

- › The thermal store EKHWC* is designed to work with a gas/oil boiler
- › The thermal store EKHWD* is designed to work with boilers as well as with Daikin Altherma High Temperature
- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options
- › Available in 300 or 500 liters



Accessory				EKHWDH 500B	EKHWDH 500B	EKHWC 300B	EKHWC 300PB	EKHWC 500B	EKHWC 500B	EKHWC 500PB	EKHWC 500B	EKHWC 500PB		
Casing	Colour	Traffic white (RAL9016) / Dark grey (RAL7011)												
	Material	Impact resistant polypropylene												
Dimensions	Unit	Width	mm	790		595		790						
		Depth	mm	790		615		790						
Weight	Unit	Empty	kg	73	76	51	53	69	74	79	80	86		
 Tank	Water volume	l		477		294		477						
	Material	Polypropylene												
	Maximum water temperature	°C		85										
	Insulation	Heat loss	kWh/24h	1.7		1.5		1.7						
	Energy efficiency class	B												
	Standing heat loss	W		72		64		72						
	Storage volume	l		477		294		477						
Heat exchanger	Domestic hot water	Quantity	1											
		Tube material	Stainless steel (DIN 1.4404)											
		Face area	m²	4.900		3.800		4.900						
		Internal coil volume	l	23.8		18.6		23.8		25.8				
		Operating pressure	bar	6										
		Average specific thermal output	W/K	2,580		1,890		2,450		2,580				
	Charging	Quantity	1						-	1				
		Tube material	Stainless steel (DIN 1.4404)						-	Stainless steel (DIN 1.4404)				
		Face area	m²	2		-		2						
		Internal coil volume	l	11		9		-		9				
		Operating pressure	bar	3		-		3						
		Average specific thermal output	W/K	1,030		920		-		1,030				
	Auxiliary solar heating	Tube material	-						Stainless steel (DIN 1.4404)					
		Face area	m²	-						1				
		Internal coil volume	l	-						4				
		Operating pressure	bar	-						3				
		Average specific thermal output	W/K	-						350				

Domestic hot water tank

Stainless steel domestic hot water tank

- › EKHTS(U)-AC: available in 200 and 260l in stainless steel
- › EKHWS(U)-B: available in 150, 200 and 300 litres in stainless steel
- › EKHWS-B: available for 400V applications
- › EKHWS(U)-D: available in 150, 180, 200, 250 and 300 litres in stainless steel



C

85°C



B


75°C




B

75°C

Accessory		EKHTS(U)		200AC		260AC	
Casing	Colour			Metallic grey			
	Material			Galvanised steel (precoated sheet metal)			
Dimensions	Unit	Height	Integrated on indoor unit	mm	2,010		2,285
		Width		mm		600	
		Depth		mm		695	
		Height		mm	1,470		1,745
Weight	Unit	Empty		kg	70		78
	Tank	Water volume		l	200		260
Tank	Material			Stainless steel (EN 1.4521)			
	Maximum water temperature			°C		75	
	Insulation Heat loss			kWh/24h		12.0	
	Energy efficiency class					B	
	Standing heat loss			W		50	
	Storage volume			l		200	
	Heat exchanger					1	
	Tube material					Duplex steel (EN 1.4162)	
Heat exchanger	Face area			m ²		1.560	
	Internal coil volume			l		7.5	

Accessory				EKHWS	(U)150B3V3	(U)200B3V3	(U)300B3V3	200B3Z2	300B3Z2
Casing	Colour				Neutral white				
	Material				Epoxy-coated mild steel				
Dimensions	Unit	Width	mm	580					
		Depth	mm	580					
		Height	mm	900	1,150	1,600	1,150	1,600	
Weight	Unit	Empty	kg	37	45	59	45	59	
 Tank	Water volume	l		150	200	285	200	285	
	Material				Stainless steel (DIN 1.4521)				
	Maximum water temperature			°C	85				
	Insulation	Heat loss	kWh/24h	1.55	1.77	2.19	1.77	2.19	
	Energy efficiency class			C					
	Standing heat loss			W	65	74	91	74	91
	Storage volume			l	150	200	285	200	285
	Heat exchanger	Quantity				1			
Tube material					Duplex steel LDX 2101				
Booster heater	Capacity	kW			3				
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/230			2~/50/400	

Accessory				EKHWS(U)	150D3V3	180D3V3	200D3V3	250D3V3	300D3V3
Casing	Colour				Neutral white				
	Material				Epoxy coated steel / Epoxy-coated mild steel				
Dimensions	Unit	Height	Tank	mm	1,000	1,164	1,264	1,535	1,745
Weight	Unit	Empty		kg	45	50	53	58	63
 Tank	Water volume				145	174	192	242	292
	Material				Stainless steel (EN 1.4521)				
	Maximum water temperature				75				
	Insulation	Heat loss		kWh/24h	1.1	1.2	1.3	1.4	1.6
	Energy efficiency class				B				
	Standing heat loss				45	50	55	60	68
	Storage volume				145	174	192	242	292
	Heat exchanger	Domestic hot water	Quantity			1			
		Tube material			Stainless steel (EN 1.4521)				
		Face area		m²	1.050	1.400	1.800		
		Internal coil volume		l	4.9	6.5	8.2		
		Operating pressure		bar	10				
Booster heater	Capacity				3				
Power supply	Phase/Frequency/Voltage				Hz/V 1~/50/230				

Domestic hot water tank


Dedicated domestic hot water for Daikin Altherma C Oil

- › The unit's sleek design blends in with other household appliances
- › Capacity 150 litres
- › Easy installation and maintenance



DFLOSTO-A

95°C

Accessory		DFLOSTO	150A
Casing	Colour		White and black
	Material		Sheet metal
Dimensions	Unit	Width mm	600
		Depth mm	736
		Height mm	1,355
Weight	Unit	Empty kg	-
 Tank	Water volume		150
	Material		-
	Maximum water temperature		95
	Insulation	Heat loss kWh/24h	-
	Energy efficiency class		-
	Standing heat loss		-
	Storage volume		150
			150
Heat exchanger	Domestic hot water	Quantity	1
		Tube material	DIN 1.4521
		Face area m ²	-
		Internal coil volume l	-
		Operating pressure bar	9
		Average specific thermal output W/K	-
	Charging	Quantity	1
		Tube material	DIN 1.4521
		Face area m ²	-
		Internal coil volume l	-
		Operating pressure bar	-
		Average specific thermal output W/K	-
	Pressurised solar	Average specific thermal output W/K	-
	Auxiliary solar heating	Tube material	-
		Face area m ²	-
		Internal coil volume l	-
		Operating pressure bar	-
		Average specific thermal output W/K	-
			-

Note: Blue cells contain preliminary data.



Table of content

controls

- Room controllers150
- Online controllers.....153
- Multi-zone controllers.....154

Madoka

The beauty of simplicity.



Silver
RAL 9006 (metallic)
BRC1HHDS



Black
RAL 9005 (matt)
BRC1HHDK



White
RAL9003 (glossy)
BRC1HHDW

User-friendly wired remote controller with premium design

Madoka combines refinement and simplicity

- › Sleek and elegant design
- › Intuitive touch-button control
- › Three colours to match any interior
- › Compact, measures only 85 x 85 mm



reddot award 2018
winner



BRC1HHDW / BRC1HHDS / BRC1HHDK

Madoka wired remote controller for Daikin Altherma 3

A new generation of user interface, redesigned and intuitive



BRC1HHDW



BRC1HHDS



BRC1HHDK

› Replacing EKRUDAS for the Daikin Altherma 3 wall mounted and floor standing:



Intuitive control with a premium design:

The smooth curves of the Madoka controller offer a sleek, refined shape which is distinguished by its striking blue circular display. Presenting a clear visual reference with large easy to read numbers, the controller features are accessed through three touch buttons, which combine intuitive control with easy adjustability for an enhanced user experience.

Three colours to match any interior design:

No matter your interior design, Madoka will match it. Silver gives an additional touch to stand out in any interior or application, while Black is an ideal match for darker, stylish interiors. White offers a sleek, modern look.

Easily set operation parameters:

Setting and finetuning your controller is simple and helps you attain higher energy savings and more comfort. The system enables you to select the space operation mode (heating, cooling or automatic), set the desired room temperature and control the domestic hot water temperature.

Easy Update via Bluetooth:

It is strongly recommended that the user interface has the latest software version. To update the software or check if updates are available, you need a mobile device and the Madoka Assistant app. This app is available from Google Play and the Apple Store



www.daikin.eu/madoka

Wired remote control for Heating

EKRUCBL*

Control

- › Manage space heating, cooling, domestic hot water and among others, booster mode
- › User-friendly remote control with contemporary design
- › Easy to use with direct accessibility to all main functions

Comfort

- › An additional user interface can include a room thermostat in the space to be heated
- › Easy commissioning: intuitive interface for advanced menu settings

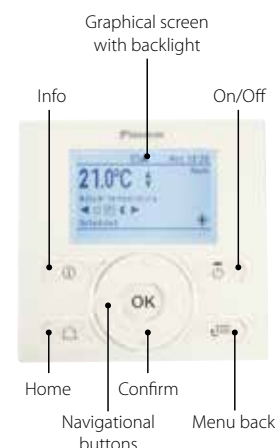
* only in combination with EKRTEETS

General features

Several languages possible depending on the model, including: English, German, Dutch, Spanish, Italian, French, Greek, Russian, etc.

Applicable Daikin units

- › Daikin Altherma low temperature split
 - Wall mounted
 - Floor standing
 - Monobloc (5-7 kW)
- › Daikin Altherma hybrid heat pump
- › Daikin Altherma ground source heat pump
- › Domestic hot water heat pump



System controller for Daikin Altherma

EKRUAHTB

Control

Reduce installation time

- › Program all settings for an installation on a laptop computer and simply upload them to the controller during commissioning
- › Reuse similar settings for related installations

Improve service diagnostics and maintenance

- › The controller records the time, date and nature of the last 20 error occurrences

Comfort

Maximise comfort with stable room temperatures

- › Raise or lower water temperature as a function of the actual room temperature
- › Manage energy consumption
- › Intuitive screen displays the output and input energy of the unit provide consumption transparency

General features

Weather depending floating set point

When the floating set point function is enabled, the set point for the leaving water temperature will be dependent on the outside ambient air temperature. At low outside ambient air temperatures, the leaving water temperature will increase to satisfy the rising heat requirement of the building. At warmer temperatures, the leaving water temperature will decrease to save energy.



Applicable Daikin units

- › Daikin Altherma low temperature monobloc (11-16 kW)
- › Daikin Altherma high temperature
- › Daikin Altherma Flex Type

Applicable Daikin units

				BRC1HHDW/S/K	EKRUCB*	EKRUHML*	EKRUAHTB	EHS157034	DOTROOMTHEAA
Split Daikin Altherma	Daikin Altherma Low Temperature	D series	4-6-8kW	•					
		C series	11-14-16kW		•				
	Daikin Altherma ECH ₂ O Low Temperature	D series	4-6-8kW					•	
		B series	11-14-16kW					•	
	Daikin Altherma HT	AD series	11-14-16kW				•		
Monobloc Daikin Altherma		C series	5-7-11-14-16kW		•				
Hybrid Daikin Altherma		C series	5-8kW		•				
		A series	4 kW			•			
Daikin Altherma ground source heat pump			10 kW		•				
Daikin Altherma 3 GEO			6-10 kW	•					
Gas	D2/NDJ-PDS	A series	12-35kW						•
	GW	A series	28-33kW						
	D2U	GCU	15-28kW					•	
Oil	D9	A2	18-42kW					•	

Always in control

Daikin Online Controller

The Daikin Online Controller application can control and monitor the status of your heating system and allows you to:

Monitor

- › The status of your heating system
- › Your energy consumption graphs*

Schedule

- › Schedule the set temperature* and operation mode with up to **6 actions per day for 7 days**
- › Enable **holiday mode**
- › View in intuitive mode

Control **

- › The **operation mode** and set temperature
- › Remotely control your system and domestic hot water

*Starting with ERGA-D

**Control via the app

- › Room thermostat control for space heating and domestic hot water
- › Leaving water temperature control for domestic hot water
- › External control for domestic hot water



Daikin Online Heating Control

The Daikin Online Control Heating app is a multifaceted programme that allows customers to control and monitor the status of their heating system.
















Main features

- › 'Daikin Eye' (intuitive setting)
- › Tank temperature monitoring
- › Equipped with GDPR (data protection)
- › Remote firmware update of LAN Adapter
- › Control over multiple unit locations

Applicable Daikin units

- › Daikin Altherma low temperature split
- › Daikin Altherma low temperature monobloc (5-7 kW)
- › Daikin Altherma ground source heat pump
- › Daikin Altherma hybrid heat pump
- › Wall mounted gas condensing boiler D2CND
- › GCU compact

Applicable Daikin units

						
				Connectivity		
				BRP069A61/62	DRGATEWAYAA	EHS157056 (RoCon G1)
Split Daikin Altherma	Daikin Altherma Low Temperature	D series	4-6-8kW			
		D series	11-14-16kW			
		C series	11-14-16kW			
	Daikin Altherma ECH2O Low Temperature	D series	4-6-8kW			
		B series	11-14-16kW			
Monobloc Daikin Altherma		C series	5-7-11-14-16kW			
Hybrid Daikin Altherma		C series	5-8kW			
		A series	4 kW			
Daikin Altherma ground source heat pump			10 kW			
Daikin Altherma 3 GEO			6-10 kW	included		
Gas	D2/NDJ-PDS	A series	12-35kW			
	D2U	GCU	15-28kW			
Oil	D9	A2	18-42kW			

Individual room control system for temperature adjustment of heating and cooling systems



General features

- › Improve energy efficiency of the home
- › Universally deployable and scalable
- › Easy and intuitive installation, operation and maintenance
- › Cost effective and convenient for the end-user

Comfort

With the help of an electronic room-by-room control system, users can regulate the temperature individually in each room.

In addition to the warmth output of the actual heating surfaces, the room temperature control system also takes all other heat sources into account, such as sunshine, warmth from lights or people, and other sources of warmth, such as a fireplace or a tiled stove. On the basis of a continuous comparison of the target and current temperatures, the room temperature control system opens and closes the individual heating circuits by way of electrical valve actuators.



Wired digital thermostat EKWCTRD11V3

The setting of the desired room temperature and the operation, can be performed comfortably via a rotary control with rotary-push action and soft ratchet. The well-structured and language-neutral symbols of the display always clearly indicate all settings.



Wired analog thermostat EKWCTRN1V3

An optimum price-performance ratio is offered for rooms where only a very good temperature control is desired, without the comfort function of the display variant.

System components



Base station EKWUFHTA1V3

The Daikin Wired Base Station is the central connection unit of a room-by-room temperature control for the surface temperature adjustment of heating and cooling systems.



Valve actuator EKWCVATR1V3

The Daikin Valve Actuator is a thermoelectric valve drive for opening and closing valves on heating circuit distributors of concealed heating and cooling systems.

Applicable Daikin units

- › Combinable to all Daikin Altherma units





Table of content

convectors


Daikin Altherma HPC	158
---------------------------	-----



Daikin Altherma HPC can be installed in any ambient thanks to its elegant design and reduced dimensions (depth is only 135 mm!). Daikin Altherma HPC can be matched with low temperature generators as: heat pumps, condensing boilers, integrated systems with solar panels. Daikin Altherma HPC reaches the set temperature with top speed and, once achieved, it is maintained constant with the lowest noise level.

Slim Size

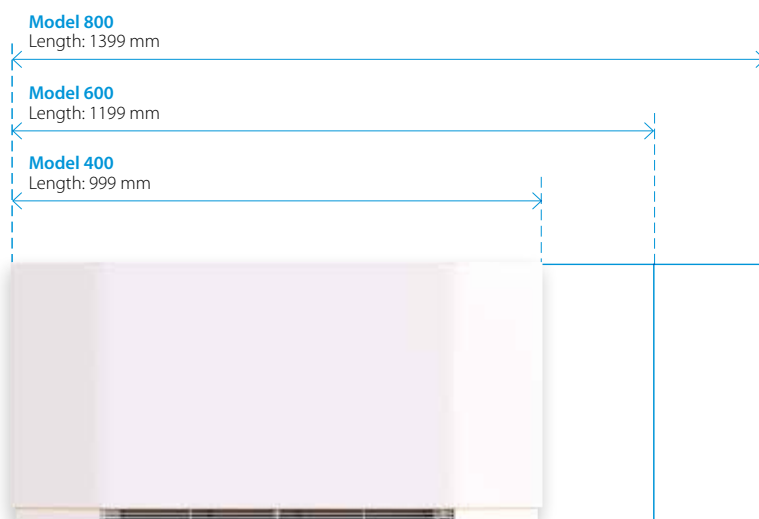With a depth of only 135 mm Airleaf can be installed in any domestic or residential dwelling.



Daikin Altherma HPC is a heat pump convector that embodies in one product the best solutions for heating and cooling.



Noiseless

The continuous modulating fan is progressively reducing the speed whilst reaching the set point, so to guarantee the perfect silence of operation. Sound pressure: down to 25dB(A) at 1m at low fan speed setting.



DC Inverter

Thanks to this newest technology, Daikin Altherma HPC has extremely low electrical consumption and perfect stability of functioning.



Modulated airflow

Whilst standard "on off" products alternate silly airflows to complete stops, with Daikin Altherma HPC the airflow is at the same time effective and imperceptible.



Controls

Smartouch controls at the highest level both for design and functions, in a wide range of varieties and versions.



Perfect combination

This heat pump convector is the natural heating and cooling emitter going with the brand new Daikin Altherma 3 range of products.



Outdoor unit				FWXV10AATV3	FWXV15AATV3	FWXV20AATV3
System	Connectable heat pump module			heat pump convector		
Cooling capacity at 7/12°C	Min.		kW	0,66	1,30	1,82
	Nom.		kW	1,36	2,16	2,52
	Max.		kW	1,77	2,89	3,20
Sensible cooling capacity at 7/12°C	Min.		kW	0,39	0,99	1,22
	Nom.		kW	0,98	1,53	1,55
	Max.		kW	1,33	2,10	1,78
Heating capacity at 35/30°C	Min.		kW	0,41	0,45	0,93
	Nom.		kW	0,82	1,29	1,66
	Max.		kW	1,14	1,73	2,15
Heating capacity at 45/40°C	Min.		kW	0,95	1,26	1,90
	Nom.		kW	1,63	2,33	3,05
	Max.		kW	2,18	3,11	3,88
Power input	Heating	Min.	kW	0,003	0,004	0,005
		Max.	kW	0,018	0,020	0,027
	Nom.		kW			
Fan speed	Min.		m³/h	118	180	246
	Nom.		m³/h	210	318	410
	Max.		m³/h	294	438	566
Casing	Colour			RAL 9003		
	Material			Metal sheet		
Dimensions	Unit	Height	mm	601		
		Width	mm	999	1199	1399
		Depth	mm	135	135	135
Weight	Unit		kg	20	23	26
Packing	Material			Carton		
Heat exchanger	Quantity			1	1	1
	Internal coil volume			0,8	1,13	1,46
	Max Operating pressure			10		
Water circuit	Piping connections diameter			3/4		
	Piping material			EUROKONUS		
Heating - Water pressure drop at 35/30°C	Minimum		kPa	0,3	2,0	1,2
		Nominal	kPa	1,3	7,5	4,0
		Maximum	kPa	2,4	12,3	8,0
Heating - Water pressure drop at 45/40°C	Minimum		kPa	1,3	8,6	3,8
		Nominal	kPa	4,2	3,3	11,2
		Maximum	kPa	7,2	11,5	21,3
Cooling - Water pressure drop at 7/12°C	Minimum		kPa	1,2	4,3	2,1
		Nominal	kPa	2,8	19,3	13,1
		Maximum	kPa	2,9	27,0	24,0
Heating - Water flow rate at 35/30°C	Minimum		kg/h	69,9	73,6	160,2
		Nominal	kg/h	141,4	221,1	285,3
		Maximum	kg/h	195,2	297,2	369,9
Heating - Water flow rate at 45/40°C	Minimum		kg/h	163,5	212,5	327,0
		Nominal	kg/h	280,3	401,1	524,6
		Maximum	kg/h	374,1	534,5	667,5
Cooling - Water flow rate at 7/12°C	Minimum		kg/h	113,5	223,7	313,0
		Nominal	kg/h	234,1	371,7	433,6
		Maximum	kg/h	303,6	496,6	550,6
Sound power level	Pressure	Heating	bar	10	10	10
	Nom. MAX		dBA	51	53	55
	Night quiet mode		dBA			
Sound pressure level	Medium speed	0 ESP	dBA			
	Nom.		dBA			
	Night quiet mode	Level 1	dBA	24,5	24,7	25,5
High speed	Nominal flow		dBA	33,4	33,8	34,2
			dBA	39,6	41,6	41,9
			dBA			
Operation range	Heating	Ambient	°C			
		Water side	°C		30	
			°C		85	
		Water side	°C		5	
			°C		20	
Control systems	Infrared remote control			no		
	Wired remote control			yes		
Installation place				Indoor		

Electrical specifications				FWXV10AATV3	FWXV15AATV3	FWXV20AATV3
Power supply	Name					
	Phase				1	
	Frequency	Hz			50	
	Voltage	V			230	
Electrical power consumption	Max.	W		0,019	0,02	0,029
	Standby	W		0,003	0,004	0,005
Current	Zmax	Text	Ω			
	Maximum running current	Heating	A	0,16	0,18	0,26





Table of content

solar heating systems

Solar panels for pressurised use and Drain-back system	170
Solar panel - pressurised system	172
Solar panels - drain-back system	174
Solar collector	177
Pump station	177



Solar

maximising renewable energy

Why choose a Daikin solar panel

ECH₂O

Daikin's solar panels are designed to complement a variety of heating systems to garner more renewable energy to deliver hot water to your home.

✓ Comfort

- › Flexible solar system for pressureless (drain-back) and pressurised solar systems
- › Hot tap water and heating support generated by solar energy
- › Highly efficient flat solar panels that are available in 3 installation options:
 - On roof
 - In-roof
 - Flat roof

✓ Energy efficiency

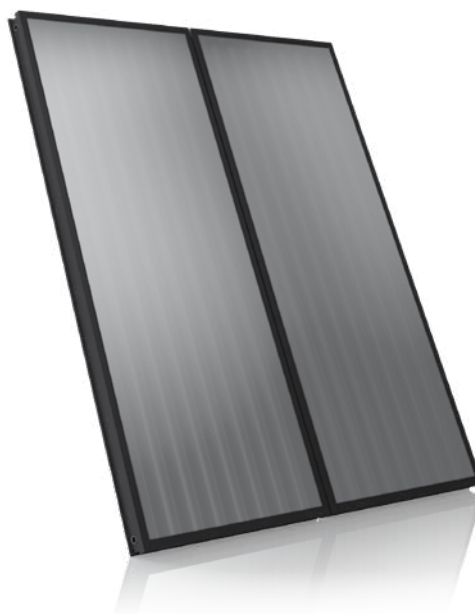
ECH₂O thermal store range: Hot water savings with solar energy

Reduce your energy costs by taking advantage of the sun's renewable energy with our solar hot water systems. Built for small and large homes, individuals can choose between a pressureless or pressurised hot water system.

✓ Reliability

Keymark Certificate

- › Daikin's solar collectors have been awarded the Solar Keymark certification. Recognised across Europe, the Keymark for solar thermal products helps users select quality solar collectors. In most European countries this certification is mandatory for the products to be eligible for subsidies.



011-751016 F




The Drain-Back solar system

✓ How is it working?

- › Starting the pump station engages the filling of the primary network and ensures the energy transfer from the solar collectors to the thermal store.
- › Whenever the pump station stops working, the water contained in the collectors goes down back to the thermal store.
- › The air intake allowing the draining is ensured by an orifice always placed out of water (at atmospheric pressure).
- › Thanks to this unique way of working, no safety devices, safety valves, expansion vessels, anti-return valve or glycol are necessary.

✓ Advantages

- › 0% glycol : the liquid carrying the heat is only the water inside the system
- › Self-working system with the pump station modulations depending the temperatures inside the collectors and the thermal store.
- › Automatic management of the defrost mode and avoidance of overheating mode.
- › No commissioning on the solar system, no replacement of the heat-carrying liquid.



The pressurised solar system

✓ How is it working?

- › The heat-carrying liquid is mixed with glycol to avoid freezing in the solar collectors system
- › Whenever the solar collectors reach an useful temperature level, the system provides a continuous supply of energy
- › The energy from the collectors is returned to the thermal store thanks to the coil.


✓ Advantages

Monovalent

- › The solar system is used as first heating source and can be coupled with a wall mounted boiler. The cold water is first pre-heated in the thermal store and the boiler can provide additional heat instantaneously if needed.

Bivalent

- › The solar system integrates a backup heater. The domestic hot water is directly produced in the thermal store. The additional heater ensures the back-up in case of low sunshine.



Material list for standard solar panel systems for hot water preparation and heating support EKS21P

Solar panel
EKS21P

Number of solar panels Type of installation Article	Type	Order No.	2 On-roof Quantity	2 In-roof Quantity	3 On-roof Quantity	3 In-roof Quantity	4 On-roof Quantity	4 In-roof Quantity	5 On-roof Quantity	5 In-roof Quantity
Solar panel	EKS21P	16 20 12-RTX	2	2	3	3	4	4	5	5
Solar panel connection	FIX-VBP	16 20 16-RTX	1	1	2	2	3	3	4	4
Installation rail for individual solar panel	FIX MP 100	16 20 66	2	2	3	3	4	4	5	5
On-roof installation kit for one solar panel ^{DB+P} (2 roof hooks per kit)	FIX-ADDP	16 20 85	4 ²⁾	0	6 ²⁾	0	8 ²⁾	0	10 ²⁾	0
In-roof installation package, basic storage for two solar panel	IB EKS21P	16 20 17	0	1	0	1	0	1	0	1
In-roof installation package, additional storage for central solar panel	IE EKS21P	16 20 18	0	0	0	1	0	2	0	3

Material list standard solar panels
with Drain-back system

Type of installation	Type	Order No.	On-roof Quantity	In-roof Quantity
Control and pump unit	RPS 4	EKSRPS4A	1	1
Support for connecting pipe solar panel	TS	16 42 45	1	1
Connection pipe solar panel	CON 15	16 47 32	1	1
Roof penetration pack solar panel on-roof	EKSRCAP EKSRCP	EKSRCAP anthracite EKSRCP red	1	0
Installation accessories, solar panel in-roof	RCIP	16 20 37-RTX	0	1

Nominal volume, complete system

Number of solar panels	2	3	4	5
Connecting line 15m	DN 16	DN 16	DN 20	DN 20
Nominal system volume (l)	20.2	21.5	22.8	24.1

Material list solar panels with pressurised system ¹⁾

Number of solar panels Article	Type	Order No.	up to 2 Quantity	up to 3 Quantity	4 to 5 Quantity
Controller	EKSDSR1A	EKSDSR1A	1	1	1
Pressure station solar panel	EKSRDS2A	EKSRDS2A	1	1	1
Solar panel pressurised solar line DN16 15m	CON 15P16	16 20 73	1	1	0
Solar panel pressurised solar connection kit DN16	CON CP16	16 20 75	1	1	0
Solar panel pressurised solar line DN20 15m	CON 15P20	16 20 74	0	0	1
Solar panel pressurised solar connection kit DN20	CON CP20	16 20 76	0	0	1
Solar panel expansion vessel 12l *	MAG S12	16 20 70	1	0	0
Solar panel expansion vessel 25l *	MAG S 25	16 20 50	0	1	0
Solar panel expansion vessel 35l *	MAG S 35	16 20 51	0	0	1
Installation material solar panel with pressure system ¹⁾	RCP	EKSRCP	1	1	1



Drain-back system



Pressurised system

DB) Only required for installations with drain-back system.

P) Only required for pressurised installations.

* Standard recommendation, after detailed expansion vessel calculation, other expansion vessels may be necessary.

1) The roof penetration for on-roof and flat roof installation is to be provided by the customer.

The solar fluid must be ordered separately.

2) The number of roof hooks must be checked if necessary (see installation instructions ADM).

Material list for standard solar panel systems for hot water preparation and heating support EKS26P

Solar panel
EKS26P

Number of solar panels Type of installation / Article	Type	Order No.	2 On-roof Quantity	2 In-roof Quantity	2 Flat roof Quantity	3 On-roof Quantity	3 In-roof Quantity	3 Flat roof Quantity	4 On-roof Quantity	4 In-roof Quantity	4 Flat roof Quantity	5 On-roof Quantity	5 In-roof Quantity	5 Flat roof Quantity
Solar panel	EKS26P	EKS26P	2	2	2	3	3	3	4	4	4	5	5	5
Solar panel connection	FIX-VBP	16 20 16 - RTX	1	1	1	2	2	2	3	3	3	4	4	4
Mounting rail single collector	FIX MP 130	16 20 67	2	2	2	3	3	3	4	4	4	5	5	5
On-roof installation pack for one solar panel ^(DB+P) (2 roof hooks per kit)	FIX-ADDP	16 20 85	4 ²⁾	0	0	6 ²⁾	0	0	8 ²⁾	0	0	10 ²⁾	0	0
In-roof installation kit, basic flashing for two solar panels	IB V26P	16 20 19	0	1	0	0	1	0	0	1	0	0	1	0
In-roof installation pack, additional flashing for central solar panel	IE V26P	16 20 20	0	0	0	0	1	0	0	2	0	0	3	0
Flat-roof frame, basic pack for two solar panels	FB V26P	16 20 58	0	0	1	0	0	1	0	0	1	0	0	1
Flat-roof frame, expansion pack additional solar panel	FE V26P	16 20 59	0	0	0	0	0	1	0	0	2	0	0	3

Material list standard solar panels with Drain-back system



Number of solar panels Installation type / Article	Type	Order No.	On-roof Quantity	In-roof Quantity	Flat roof Quantity
Control and pump unit	EKS26P4A	EKS26P4A	1	1	1
Additional support troughs for connecting pipe solar panel	TS	16 42 45	1	1	1
Connection pipe solar panel	CON 15	16 47 32	1	1	1
Roof penetration pack solar panel on-roof	EKS26CAP EKS26CRP	EKS26CAP Anthracite EKS26CAP Red	1	0	0
Installation accessories, solar panel in-roof	RCIP	16 20 37-RTX	0	1	0
Roof penetration pack solar panel flat roof	RCFP	16 20 38-RTX	0	0	1

Material list solar panels with pressurised system ¹⁾

Number of solar panels Installation type / Article	Type	Order No.	up to 2 Quantity	up to 3 Quantity	4 to 5 Quantity	Nominal volume, complete system				
Controller	EKS26SR1A	EKS26SR1A	1	1	1	Number of solar panels	2	3	4	5
Pressure station solar panel	EKS26RDS2A	EKS26RDS2A	1	1	1	Connecting line 15m	DN 16	DN 16	DN 20	DN 20
Solar panel pressurised solar line DN16 15m	CON 15P16	16 20 73	1	1	0	Nominal volume entire system (l)	21	22.7	24.4	26.1
Solar panel pressurised solar connection kit DN16	CON CP16	16 20 75	1	1	0					
Solar panel pressurised solar line DN20 15m	CON 15P20	16 20 74	0	0	1					
Solar panel pressurised solar connection kit DN20	CON CP20	16 20 76	0	0	1					
Solar panel expansion vessel 12l *	MAG S12	16 20 70	1	0	0					
Solar panel expansion vessel 25l *	MAG S 25	16 20 50	0	1	0					
Solar panel expansion vessel 35l *	MAG S 35	16 20 51	0	0	1					
Installation material solar panel with pressure system ¹⁾	RCP	EKS26RCP	1	1	1					

Solar panel - Overview EKSH26P - standard horizontal model

Material list for standard solar panel systems for hot water preparation and heating support EKSH26P

Solar panel H26 P



Number of solar panels Type of installation Article	Type	Order No.	1 On-roof Quantity	1 Flat roof Quantity	2 On-roof Quantity	2 Flat roof Quantity	3 On-roof Quantity	3 Flat roof Quantity	4 On-roof Quantity	4 Flat roof Quantity	5 On-roof Quantity	5 Flat roof Quantity
Solar panel	EKSH26P	EKSH26P	1	1	2	2	3	3	4	4	5	5
Solar panel connection	FIX-VBP	16 20 16 - RTX	0	0	1	1	2	2	3	3	4	4
Installation rail guide for individual solar panel	FIX MP 200	16 20 68	1	1	2	2	3	3	4	4	5	5
On-roof installation pack for one solar panel ^{P)} (4 roof hooks per kit)	FIX-ADDP	16 20 85	2 ²⁾	0	4 ²⁾	0	6 ²⁾	0	8 ²⁾	0	10 ²⁾	0
Flat roof support frame basic kit for one solar panel	FB H26P	16 20 60	0	1	0	1	0	1	0	1	0	1
Flat roof trestle Extension pack for one additional solar panel	FE H26P	16 20 61	0	0	0	1	0	2	0	3	0	4



Nominal volume, complete system

Number of solar panels	2	3	4	5
Connecting line 15m	DN 16	DN 16	DN 20	DN 20
Nominal volume system (l)	21.6	23.9	26	28.1

Material list solar panels with pressurised system ¹⁾



Pressurised system

Number of solar panels Installation type / Article	Type	Order No.	up to 3 Quantity	4 to 5 Quantity
Pressurised thermal store	EKHWP500PB	EKHWP500PB	1	1
Controller	EKSDSR1A	EKSDSR1A	1	1
Pressure station solar panel	EKSRDS2A	EKSRDS2A	1	1
Solar panel pressurised solar line DN16 15m	CON 15P16	16 20 73	1	0
Solar panel pressurised solar connection kit DN16	CON CP16	16 20 75	1	0
Solar panel pressurised solar line DN20 15m	CON 15P20	16 20 74	0	1
Solar panel pressurised solar connection kit DN20	CON CP20	16 20 76	0	1
Solar panel expansion vessel 12l *	MAG S12	16 20 70	0	0
Solar panel expansion vessel 25l *	MAG S 25	16 20 50	1	0
Solar panel expansion vessel 35l *	MAG S 35	16 20 51	0	1
Installation material solar panel with pressure system ¹⁾	RCP	EKSRCP	1	1

P) Only required for pressurised installations.

* Standard recommendation, after detailed expansion vessel calculation, other expansion vessels may be necessary.

1) The roof penetration for on-roof and flat roof installation is to be provided by the customer. The solar fluid must be ordered separately.

2) The number of roof hooks must be checked if necessary (see installation instructions ADM).

Solar panel - Overview EKS26P - standard vertical model

List of materials for solar components that connect several storage tanks















Total number of storage tanks Article	Type	Order No.	2 Quantity	3 Quantity
Solar panel storage tank extension kit	CON SX	16 01 20	1	1
Solar panel storage tank extension kit 2	CON SXE	16 01 21	0	1

Solar panels for pressurised use and Drain-back system












High-efficiency flat solar panels

Stable watertight solar panel frame made of black anodised aluminium, highly special coating and safety glass, low-reflection, efficient heat insulation of the solar panel back plane with mineral wool. The minimum efficiency of the solar panel is more than 525kWh/m² per year (location: Würzburg, Germany). Suitable for drain-back and pressurised systems.

		Article	Type	Order No.
High-efficiency flat solar panel EKS21P		(2,000 x 1,006 x 85mm), solar panel area 1.79m ² , Weight 35kg, water content 1.3l. Max. 6 bar.	EKS21P	EKS21P
High-efficiency flat solar panel EKS26P		(2,000 x 1,300 x 85mm), solar panel area 2.35m ² , Weight 42kg, water content 1.7l. Max. 6 bar.	EKS26P	EKS26P
High-efficiency flat solar panel EKSH26P		(1,300 x 2,000 x 85mm), solar panel area 2.35m ² , Weight 42kg, water content 2.1l. Max. 6 bar.	EKSH26P	EKSH26P
Solar panel connection		Installation profile connector, expansion joints and double clamping blocks.	FIX-VBP	16 20 16-RTX
Installation profile rail for EKS21P		Consisting of installation profile rails and solar panel securing clips.	FIX MP 100	16 20 66
Installation profile rail for EKS26P		Consisting of installation profile rails and solar panel securing clips.	FIX MP 130	16 20 67
Installation profile rail for EKSH26P		Consisting of installation profile rails and solar panel securing clips.	FIX MP 200	16 20 68
Support for connecting pipe solar panel		Support troughs (5 in number, length, in each case, 1.3m) for support of the solar panel plastic connection lines in Drain-Back.	TS	16 42 45
On-roof installation pack slate		4 roof hooks for flat roofing, e.g. slate, for one solar panel.	FIX ADS	16 47 23
On-roof installation pack MULTI		2 height-adjustable roof hooks for drain-back and pressure system, including mounting materials.	FIX-ADDP	16 20 85
Roof holder for corrugated covering		4 holders including fixing material for one solar panel.	FIX-WD	16 47 03-RTX
Roof holder for welted sheet metal covering		4 holders including fixing material for one solar panel. Note: for on-roof installation only.	FIX-BD	16 47 04-RTX

Solar panels for pressurised use and Drain-back system



	Article	Type	Order No.
Basic in-roof assembly package EKS21P	 Basic flashing for two solar panels, duct set including installation material. Minimum roof gradient 15°.	IB V21P	16 20 17
Extension kit in-roof mounting EKS21P	 Additional package for an additional solar panel, duct set including installation material. Minimum roof gradient 15°.	IE V21P	16 20 18
Basic in-roof mounting pack EKS26P	 Basic flashing for two solar panels, duct set including installation material. Minimum roof gradient 15°.	IB V26P	16 20 19
Expansion in-roof mounting pack EKS26P	 Additional package for an additional solar panel, duct set including installation material. Minimum roof gradient 15°.	IE V26P	16 20 20
In-roof covering slate supplementary pack	 30 layer pieces for flat coverings, e.g. slate (per basic in-roof pack you will need one supplementary pack).	FIX-IES	16 46 16-RTX
Basic pack flat-roof frame for mounting of two EKS26P solar panels on flat roofs	 Pre-assembled system for simple and rapid installation, adjustable gradient (30° to 60°). Suitable for wind load zone WLZ 2 (only to a limited extent for WLZ 3).	FB V26P	16 20 58
Extension pack flat-roof frame for one additional EKS26P solar panel	 Extension for FB V26P.	FE V26P	16 20 59
Basic pack flat-roof frame for mounting of one EKSH26P collector on flat roofs	 Pre-assembled system for simple and rapid installation, adjustable gradient (30° to 60°). Suitable for wind load zone WLZ 2 (only to a limited extent for WLZ 3).	FB H26P	16 20 60
Extension pack flat-roof frame for one additional EKSH26P solar panel	 Extension for FB H26P.	FE H26P	16 20 61
Disassembly tools ducts drain-back system		FIX LP	16 20 29-RTX














Drain-back system



Pressurised system








Solar panel - pressurised system



		Article	Type	Order No.
Controller		Temperature-difference regulator for the solar panel with pressure system. Regulator with graphic display for representation of hydraulic schematics and yield balances, for example. Including return flow and storage tank temperature sensor and housing for wall mounting.	EKSDSR1A	EKSDSR1A
Pressure station		Consists of: Pipe connection ø 22mm including pipe compression fittings and support sleeves (5x), flow measurement unit with 2 x KFE cock, integrated air separator, ball-cocks with integrated back-flow prevention, Grundfos Solar 25-65 pump, safety group with pressure gauge, including insulation and installation accessories.	EKSRDS2A	EKSRDS2A
Fill and drain connection		For RPS3 and tanks from 2013 onwards, for easy filling and emptying through the fill and drain valve.	KFE BA	16 52 15
Solar panel pressurised solar line DN 16		15m thermally-insulated stainless steel corrugated pipe line for solar panel pressurised systems with inserted sensor line nominal size DN 16. For systems of up to 3 solar panels and a line length of up to 25m. Without connection fittings.	CON 15P16	16 20 73
Solar panel pressurised solar connection kit DN 16		All necessary fittings for connecting the pressurised solar line DN 16. Required together with CON 15P16.	CON CP16	16 20 75
Solar panel pressurised solar connection kit DN 16		Fittings for connecting two pressurised solar lines DN 16.	CON XP16	16 20 71
Solar panel pressurised solar line DN 20		15m thermally-insulated stainless steel corrugated pipe line for solar panel pressurised systems with inserted sensor line nominal size DN 20. For systems up to 5 solar panels and a line length of up to 25m. Without connection fittings.	CON 15P20	16 20 74
Pressurised solar connection kit DN 20		All necessary fittings for connecting the pressurised solar line DN 20. Always required together with CON 15P20.	CON CP20	16 20 76
Solar panel pressurised solar connection kit DN 20		Fittings for connecting the pressurised solar line DN 20.	CON P20	16 20 72
Installation material solar panel pressurised system		Connection fittings for pressurised systems and solar panel installation material, consisting of installation material for solar panel and connection pipe, 2m UV-proof thermal insulation for the outer area, connection fittings and panel temperature sensor. The roof penetration must be provided to the customer.	RCP	EKSRCP
Solar panel row connection for the solar panel with pressure system		Connection kit for connecting two rows of solar panels in parallel. Consisting of solar panel installation material, equipotential bonding terminals, end caps, connection elbows and 1m thermally-insulated piping.	CON LCP	16 20 45

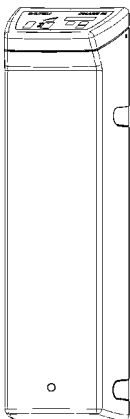






Solar panel - pressurised system



		Article	Type	Order No.
Expansion vessel 12l with connection block		For solar panels with pressure systems of max. 2 x EKS21P - solar panels.	MAG S12	16 20 70
Expansion vessel 25l with connection block		For solar panels with pressure systems of max. 3 solar panels.	MAG S 25	16 20 50
Expansion vessel 35l with connection block		For solar panels with pressure systems of max. 5 solar panels.	MAG S 35	16 20 51-RTX
GLYCOL CORACON SOL 5F		20l can of pre-mixed solar fluid, functional range up to -28°C.	CORACON SOL 5F	16 20 52-RTX
GLYCOL CORACON SOL 5		1l of solar fluid concentrate for extension of the frost range. With 20l of solar fluid with 1 l additive, the use range extends down to -33°C. For 20l of solar fluid with 2x 1l of additive, the functional range is extended to -38°C.	CORACON SOL 5	16 20 53
Circulation lance		For energetically-optimised incorporation of the domestic hot water circulation in the hot water connection of the warm-water storage tank.	ZKL	16 51 13
Thermostatic mixer as scalding protector		Thermal safety device for the domestic water pipe. Setting range 35-60°C.	VTA32	15 60 15
Screw connection kit 1"		For connection of the scald protection VTA32.		15 60 16
Thermostatic regulator 230V		With capillary tube temperature sensor, setting range 35-85°C.	SCS-TR	16 41 30
3-way switching valve 1" male		With motor drive 230V, switchover time 6 sec.	3 W-UV	15 60 34

Solar panels - drain-back system



		Article	Type	Order No.
EKS RPS4 regulation and pump unit		<p>Ready to plug in unit (230V), with digital differential temperature regulation, return and storage tank temperature sensors, high-efficiency circulation pump.</p> <p>INFO: The flow sensor (FLS 20), included in the supply, provides more effective operation of the EKS RPS4. In addition to direct calculation of the heat output, the sensor allows modulation of the operating pump and thus an additional saving in electrical energy.</p>	EKS RPS4	EKS RPS4A
Fill and tap connection solar panel with drain-back system		For easy filling of solar panels with drain-back system from 2013 onwards through the solar flow connector.	KFE DB BA	16 52 16
Burner blocking contact connection cable		For RPS2, RPS3, RPS3 M, RPS3 25M.	BSKK	16 41 10-RTX
Solar panel FlowGuard solar flow regulator		With solar flow indicator 2-16l/min.	FLG	16 41 02-RTX
Connection tube solar panel		Ready to connect connection line 15m between solar panel and pump station, consisting of thermally-insulated flow and return line with integrated sensor cable.	CON 15	16 47 32
Connection tube solar panel		Ready to connect connection line 20m between solar panel and pump station, consisting of thermally-insulated flow and return line with integrated sensor cable.	CON 20	16 47 33
Solar panel solar flow sensor 100		Sensor for expanding RPS3 25M control system, enables heat yield metering in large installations. Measuring range up to 100l/min.	FLS 100	16 41 03-RTX
Extension		For connecting a collector array (EKSV21P, EKSV26P, EKSH26P) to the on-site rigid copper connection pipes when using roof penetration box kits EKSRCAP, EKSRCP, RCIP, RCFP.	CON X20 25M	16 42 32




Solar panels - drain-back system



	Article	Type	Order No.										
Extension connection tube solar panel	<div>Ready to plug in including installation material and connection fittings</div> <div>L = 2.5m L = 5.0m L = 10.0m</div> <div>Maximum possible length of the connection pipe:</div> <table><thead><tr><th>Number of solar panels</th><th>Max. length</th></tr></thead><tbody><tr><td>2</td><td>45m</td></tr><tr><td>3</td><td>30m</td></tr><tr><td>4</td><td>17m</td></tr><tr><td>5</td><td>15m</td></tr></tbody></table>	Number of solar panels	Max. length	2	45m	3	30m	4	17m	5	15m	CON X 25 CON X 50 CON X 100	16 42 61 16 42 62 16 42 63
Number of solar panels	Max. length												
2	45m												
3	30m												
4	17m												
5	15m												
Extension of the inflow pipe	<div>UV-resistant thermally-insulated, length = 8m, including cable connecting fitting for the solar panel sensor line.</div>	CON XV 80	16 42 64										
On-roof roof penetration, anthracite	<div>Roof penetration pack with connection fittings and solar panel installation material, consisting of anthracite roof penetration, installation material for solar panel and connection pipe, 2m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</div>	EKSRCAP	EKSRCAP										
On-roof roof penetration, tile red	<div>Roof penetration pack with connection fittings and solar panel installation material, consisting of tile red roof penetration, installation material for solar panel and connection pipe, 2m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</div>	EKSRCRP	EKSRCRP										
Solar panel panel row connection	<div>Connection kit for connecting two rows of solar panels one above the other. Consisting of solar panel installation material, equipotential bonding terminals, end caps, connection elbows and 1m thermally-insulated piping.</div>	CON RVP	16 20 35-RTX										
Installation material, solar panel in-roof	<div>Ready to plug in including installation material and connection fittings.</div>	RCIP	16 20 37-RTX										
Roof penetration, flat roof	<div>Roof penetration pack with connection fittings and solar panel installation material, consisting of flat-roof roof penetration, installation material for solar panel and connection pipe, 8.5m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</div>	RCFP	16 20 38-RTX										
Roof penetration flat-roof for alternate side solar panel connection	<div>Flat roof penetration with screw connections and blind plugs for penetration openings which are not used.</div>	CON FE	16 47 09										
Solar panel boiler extension kit	<div>Connection kit for the connection of two warm-water storage tanks, consisting of drain-back connection tube and lead supply line.</div>	CON SX	16 01 20										

Solar panels - drain-back system



		Article	Type	Order No.
Solar panel storage tank extension kit 2		Connection kit for the connection of additional warm-water storage tanks, consisting of drain-back connection tube and lead supply line.	CON SXE	16 01 21
Circulation lance		For energetically-optimised incorporation of the tap-water circulation in the hot water connection of the warm-water storage tank.	ZKL	16 51 13
Thermostatic mixer as scalding protector		Thermal safety device for the warm-water pipe. Setting range 35-60°C.	VTA32	15 60 15
Screw connection kit 1"		For connection of the scald protection VTA32.		15 60 16
Thermostatic regulator 230V		With capillary tube temperature sensor, setting range 35-85°C.	SCS-TR	16 41 30
3-way switching valve 1" male		With motor drive 230V, switch-over time 6 sec.	3 W-UV	15 60 34

Solar collector

Thermal solar collector for hot water production

- › Solar collectors can produce up to 70% of the energy needed for hot water production – a major cost saving
- › Horizontal solar collector for domestic hot water production
- › Vertical solar collector for domestic hot water production
- › High efficiency collectors transfer all the short-wave solar radiation into heat as a result of their highly selective coating
- › Easy to install on roof tiles
- › Can be used for drain-back and pressurised applications



Accessory				EKSVP21P	EKSVP26P	EKSH26P
Mounting				Vertical		Horizontal
Dimensions	Unit	HeightxWidthxDepth	mm	2000x1006x85	2000x1300x85	1300x2000x85
Weight	Unit		kg	33	42	
Volume			l	1.3	1.7	2.1
Surface	Outer		m ²	2.01	2.60	
	Aperture		m ²	1.800	2.360	
	Absorber		m ²	1.79	2.35	
Coating				Micro-therm (absorption max. 96%, Emission ca. 5% +/-2%)		
Absorber				Harp-shaped copper pipe register with laser-welded highly selective coated aluminium plate		
Glazing				Single pane safety glass, transmission +/- 92%		
Allowed roof angle Min.~Max.				15~80		
Operating pressure Max.				6		
Stand still temperature Max.				192		
Thermal performance	collector efficiency (η _{col})		%	61		
	Zero loss collector efficiency η ₀		%	0.781	0.784	
	Heat loss coefficient a ₁		W/m ² .K	4.240	4.250	
	Temperature dependence of the heat loss coefficient a ₂		W/m ² .K ²	0.006	0.007	
	Thermal capacity		kJ/K	4.9	6.5	
Auxiliary	Solpump		W	-		
	Annual auxiliary electricity consumption Q _{aux}		kWh	-		
	Solstandby		W	-		

EKSRRPS4A/EKSRRDS2A

Pump station


- › Save energy and reduce CO₂ emissions with a solar system for domestic hot water production
- › Pump station connectable to drain-back solar system
- › Pump station and control provide the transfer of solar heat to the domestic hot water tank



Accessory				EKSRRPS4	EKSRRDS2A
Mounting				On side of tank	On wall
Dimensions	Unit	HeightxWidthxDepth	mm	815x142x230	410x314x154
Weight	Unit		kg	6	
Operation range	Ambient temperature	Min.~Max.	°C	5~40	~40
Operating pressure Max.				-	6
Stand still temperature Max.				85	120
Control				Digital temperature difference controller with plain text display	
Power consumption				2	5
Sensor	Solar panel temperature sensor			Pt1000	
	Storage tank sensor			PTC	-
	Return flow sensor			PTC	-
	Feed temperature and flow sensor			Voltage signal (3.5V DC)	-
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50/230	~/50/230
Power supply intake				Indoor unit	
Auxiliary	Solpump		W	33	23
	Annual auxiliary electricity consumption Q _{aux}		kWh	78	89
	Solstandby		W	2.00	5.00

Notes

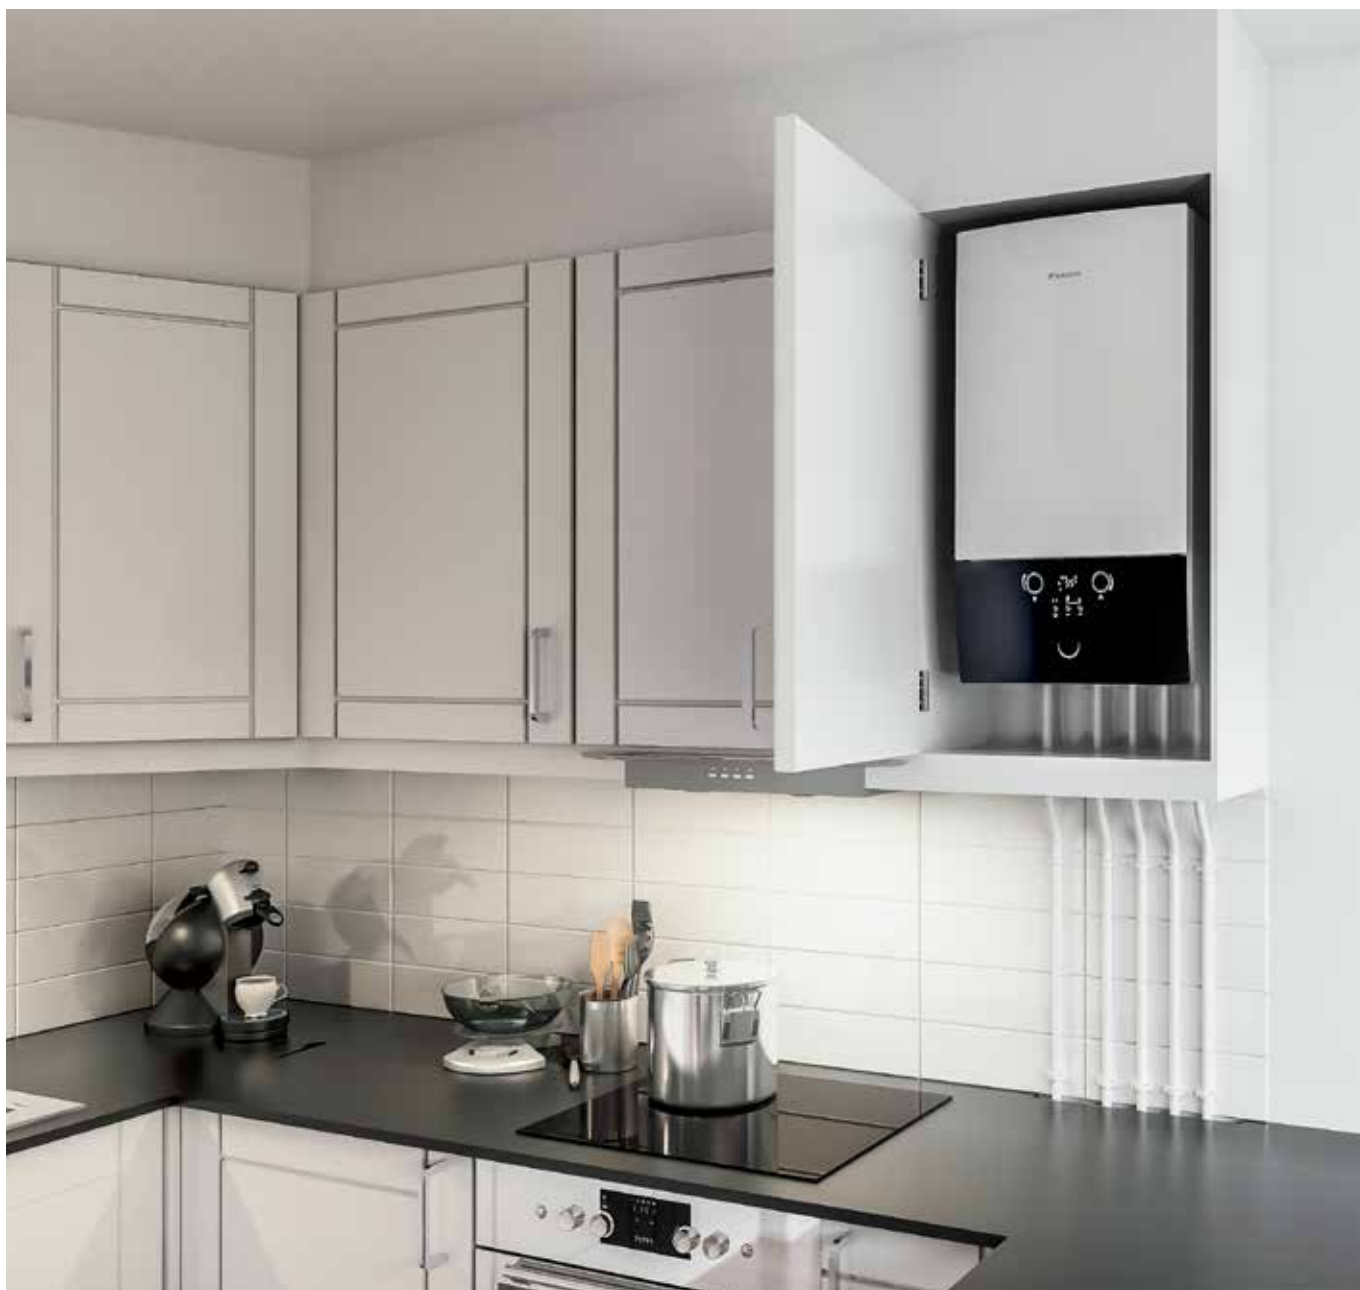Notes




Trust Daikin

Daikin may not be a household name. After all, we don't make cars, TVs, fridges or washing machines. But we do make world-class heat pumps. In fact, more than 275,000 Daikin Altherma heat pumps have been fitted across Europe since its initial launch in 2006. Because we focus on doing only what we're best at: creating the most efficient heating, ventilation and air conditioning solutions, renowned for design excellence, quality and reliability. So you can depend on Daikin for the ultimate in comfort, leaving you free to focus on other essentials.

ERHQ-BV3, EBHQ-BBV3, EDHQ-BBV3 are not intended for use in Erp cold regions as defined in EN no 811-814/2013

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN19-721

04/19



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.